


Features

- Trench Power LV MOSFET technology
- High Power and current handing capability

Application


- PWM application
- Load switch




Marking and pin assignment

Product Summary

V_{DS}	$R_{DS(ON)}$ MAX	I_D MAX
30V	50mΩ@10V	4A
	60mΩ@4.5V	



SOT-23 top view



Schematic diagram



Pb-Free



RoHS



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)







Symbol	Parameter		Rating	Unit
Common Ratings (TC=25°C Unless Otherwise Noted)				
V _{DS}	Drain-Source Breakdown Voltage		30	V
V _{GS}	Gate-Source Voltage		±20	V
T _J	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-55 to 150	°C
I _S	Diode Continuous Forward Current	Tc=25°C	4	A
Mounted on Large Heat Sink				
I _{DM}	Pulse Drain Current Tested	Tc=25°C	15	A
I _D	Continuous Drain Current@GS=10V	Tc=25°C	4	A
P _D	Maximum Power Dissipation	Tc=25°C	1	W
R _{θJA}	Thermal Resistance Junction-Ambient((†1 in2 Pad of 2-oz Copper), Max.)		125	°C/W




Electrical Characteristics (TJ=25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	VGS=0V, ID=250μA	30	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	VDS=30V, VGS=0V	--	--	1.0	uA
I _{GSS}	Gate-Body Leakage Current	VGS=±20V, VDS=0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	VDS=VGS, ID=250μA	1.0	1.5	2.2	V
R _{DS(on)}	Drain-Source On-State Resistance	VGS=10V, ID=4A	--	32	50	mΩ
		VGS=4.5V, ID=3A	--	41	60	mΩ
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	VDS=15V, VGS=0V, f=1MHz	--	275	--	pF
C _{OSS}	Output Capacitance		--	43	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	33	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	VDS=15V, ID=4A, VGS=10V	--	6.6	--	nC
Q _{gs}	Gate Source Charge		--	1.4	--	nC
Q _{gd}	Gate Drain Charge		--	2	--	nC
t _{d(on)}	Turn-on Delay Time	VDD=15V, RL=3.6Ω, VGS=4.5V, RG=6Ω	--	3.3	--	nS
t _r	Turn-on Rise Time		--	14.8	--	nS
t _{d(off)}	Turn-Off Delay Time		--	12	--	nS
t _f	Turn-Off Fall Time		--	3.1	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25°C, Is=4A,	--	--	1.2	V



Typical Operating Characteristics

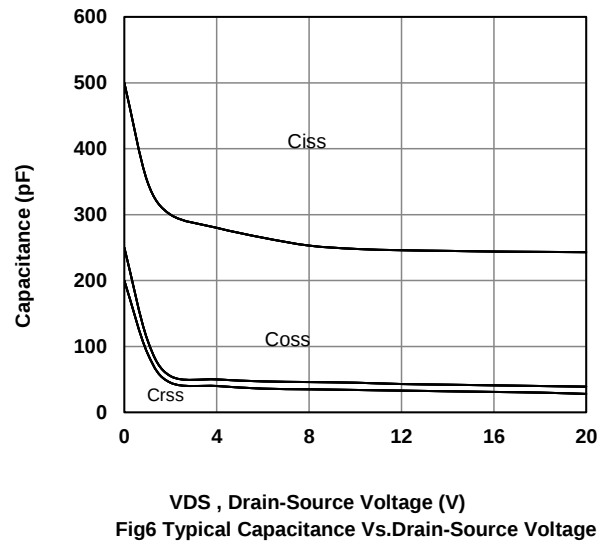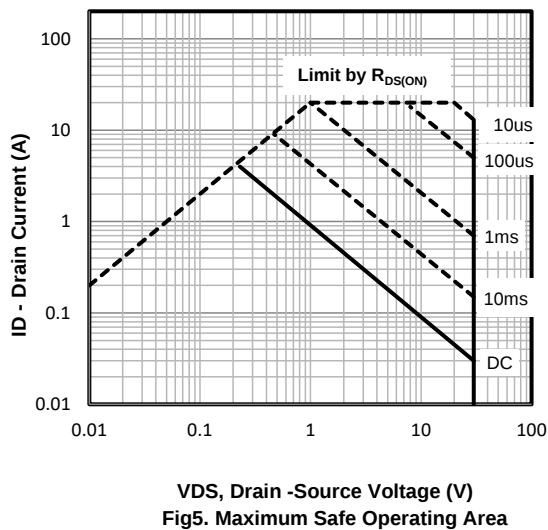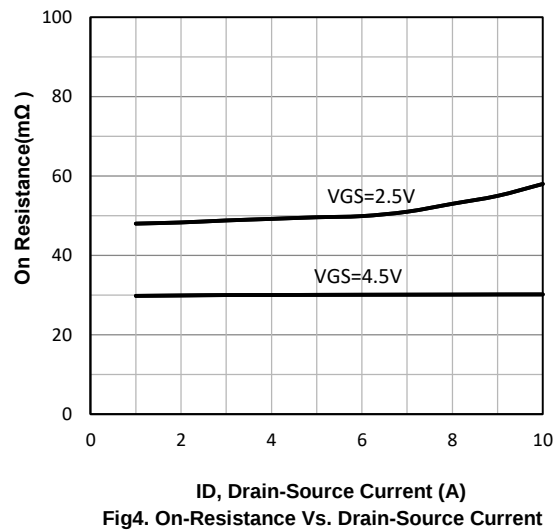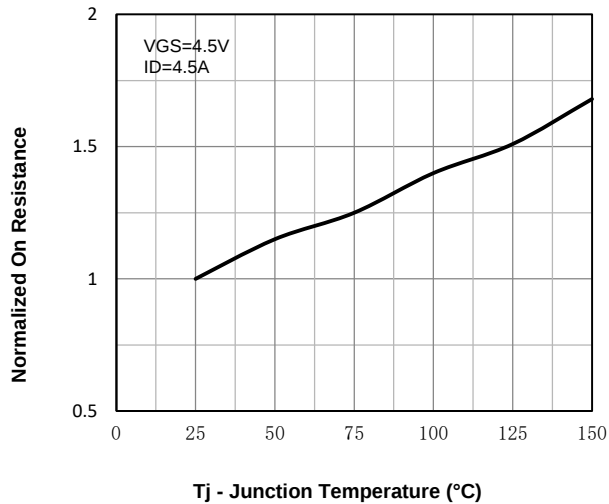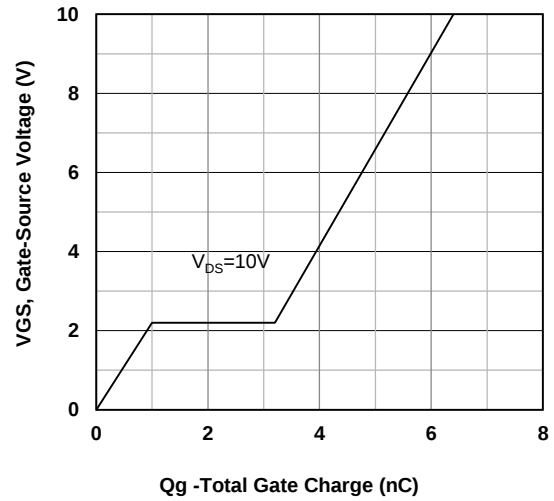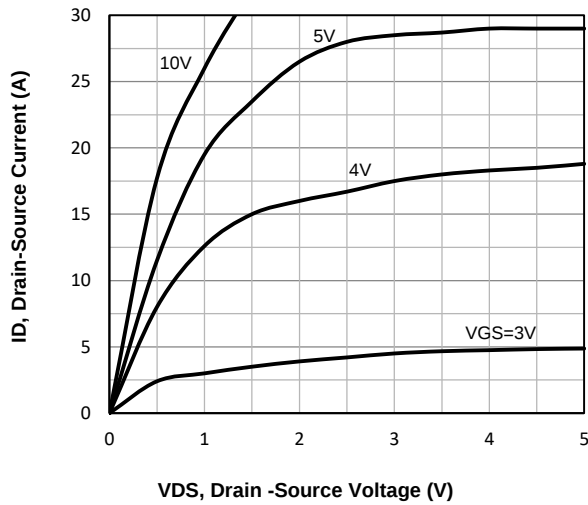

SOT-23 Package information

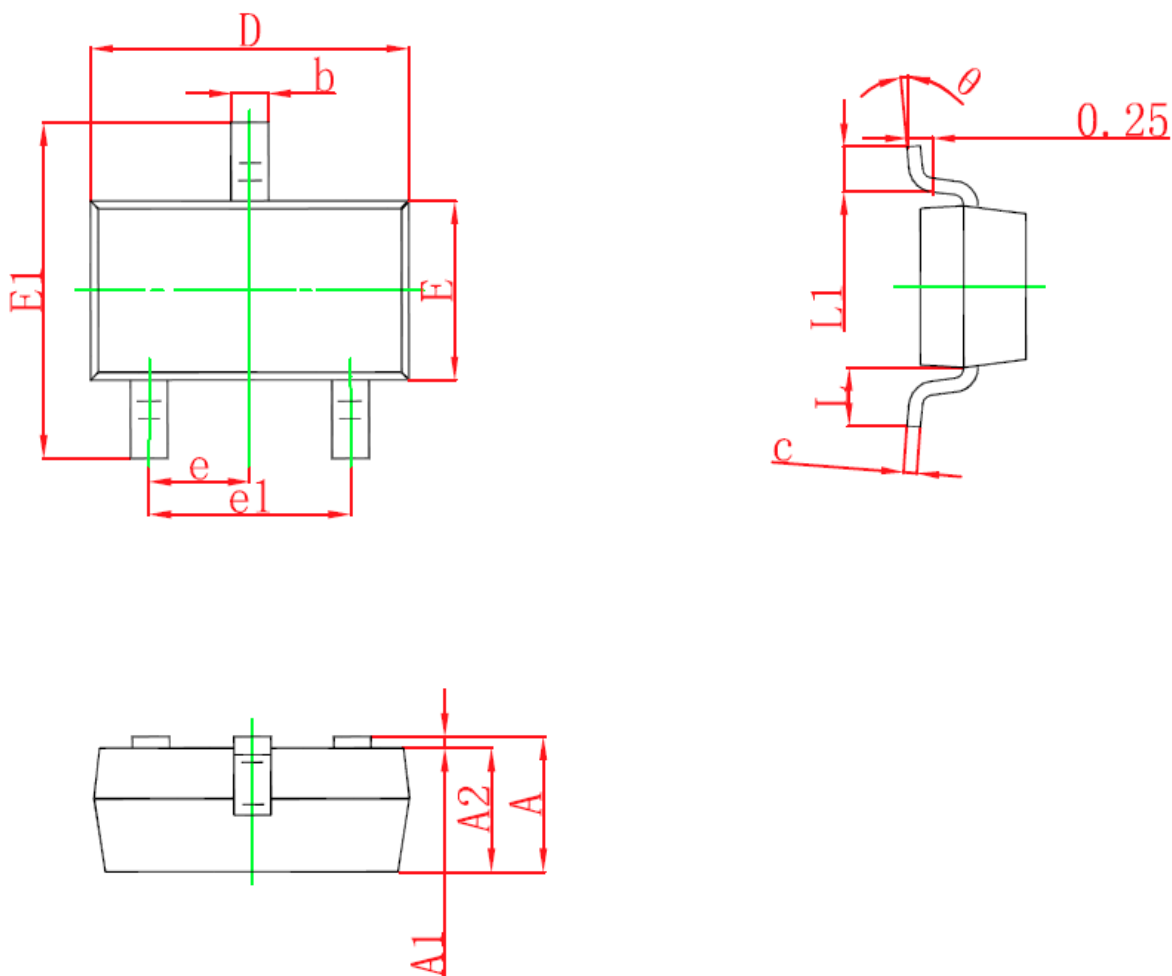

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°