

SS54L~SS510L

5.0Amp Surface Mounted Schottky Barrier Rectifiers

Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Built-in strain relief, ideal for automated placement
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed
260°C/10 seconds at terminals

Mechanical Data

Case : Molded plastic body


Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

Weight : 0.0035 ounce, 0.098 grams

DO-214AA/SMB

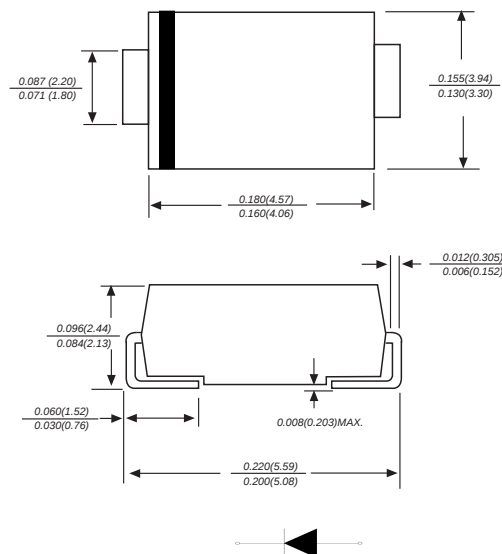

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	SS54L	SS545L	SS55L	SS56L	SS58L	SS510L	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	40	45	50	60	80	100	V
Maximum RMS voltage	V _{RMS}	28	31.5	35	42	56	70	V
Maximum DC blocking voltage	V _{DC}	40	45	50	60	80	100	V
Maximum average forward rectified current at T _L =100°C	I _(AV)	5.0						A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	120.0						A
Maximum instantaneous forward voltage at 5.0A	V _F	0.48			0.55	0.70		V
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =125°C	I _R	0.5 50				0.2 20		mA
Typical thermal resistance	R _{qJA}	85.0						°C/W
Operating junction temperature range	T _J	-55 to +150						°C
Storage temperature range	T _{STG}	-55 to +150						°C

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

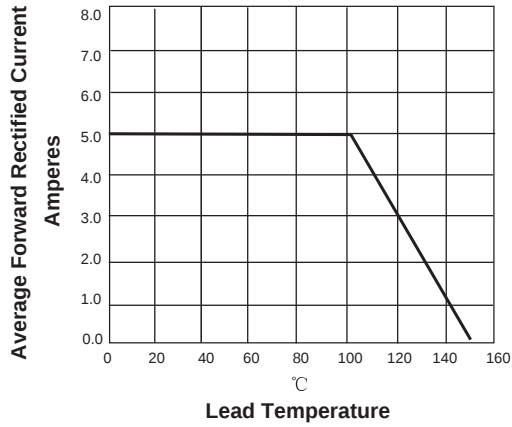


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

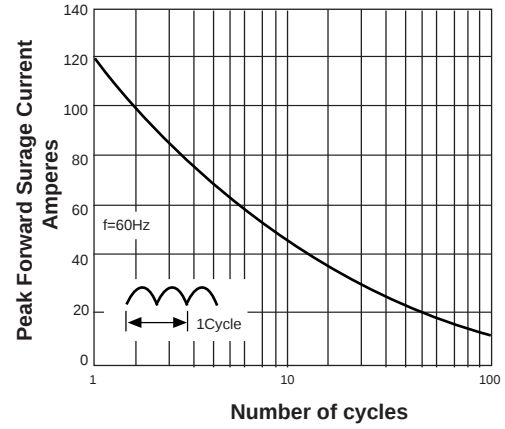


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

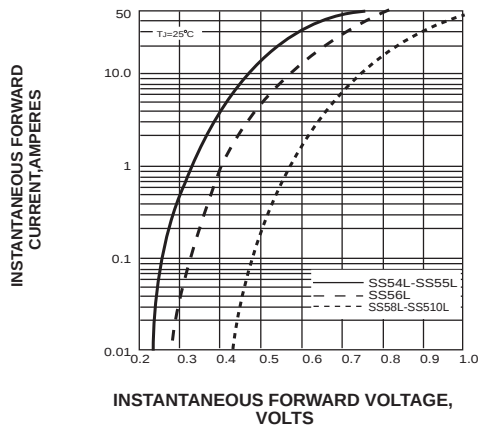


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

