



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Name: SAW Filter 1030 MHz (BW 6MHz) SMD 3.0X3.0 mm

TST Parts No.: TA2002A

Customer Parts No.: _____

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Sam Lin 

Approval by: _____ Bob Chau 

Date: _____ 2016/07/15

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 1030MHz

MODEL NO.:TA2002A

REV. NO.:1.0

A. MAXIMUM RATING:

1. Input Power Level: 20 dBm
2. DC Voltage : 3 V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C

RoHS Compliant
Lead free
Lead-free soldering

Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:


Terminating source impedance (single) : $Z_s = 50 \Omega$

Terminating load impedance(single) : $Z_L = 50 \Omega$

Item	Unit	Min.	Typ.	Max
Center frequency Fc	MHz	-	1030	-
Insertion Loss (1027 ~ 1033 MHz) IL	dB	-	2.7	4.0
Amplitude ripple (1027 ~ 1033 MHz)	dB	-	1.0	2.2
VSWR (1027 ~ 1033 MHz)	-	-	1.6	2.4
Attenuation (Reference level from 0 dB)				
DC ~ 910 MHz	dB	45	50	-
1046 MHz	dB	5	34	-
1090 ~ 1300 MHz	dB	45	50	-
Temperature coefficient of frequency	ppm/°C	-	-36	-


C. TEST CIRCUIT:

HP Network analyzer

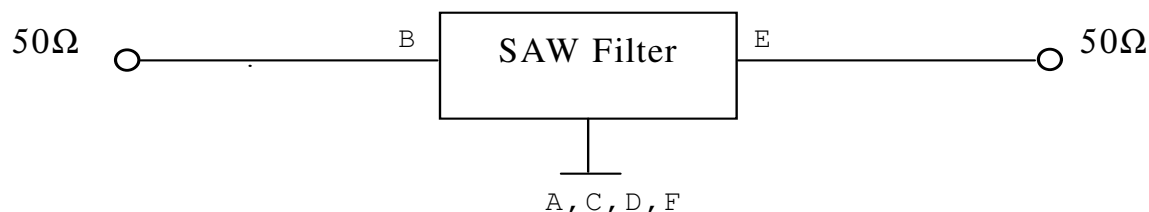


D. Frequency Characteristics:


S21 response: Center 1030MHz, Span 200MHz

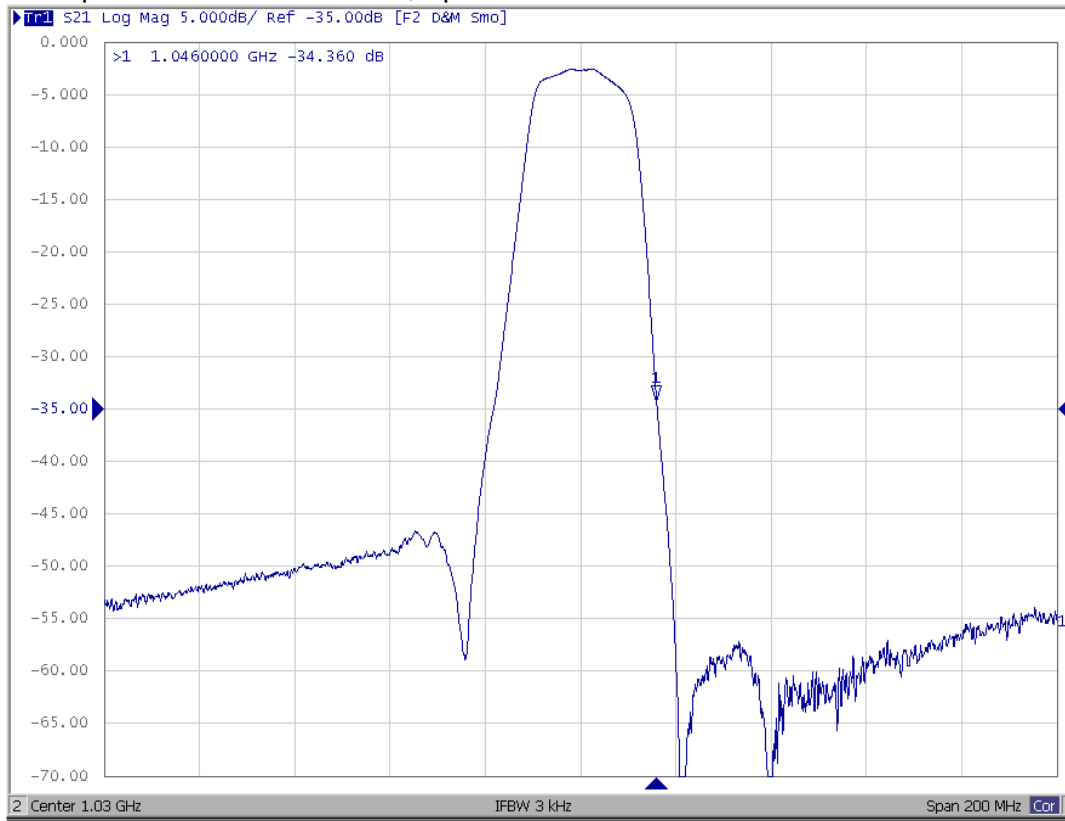

S21 respons: Span 50MHz

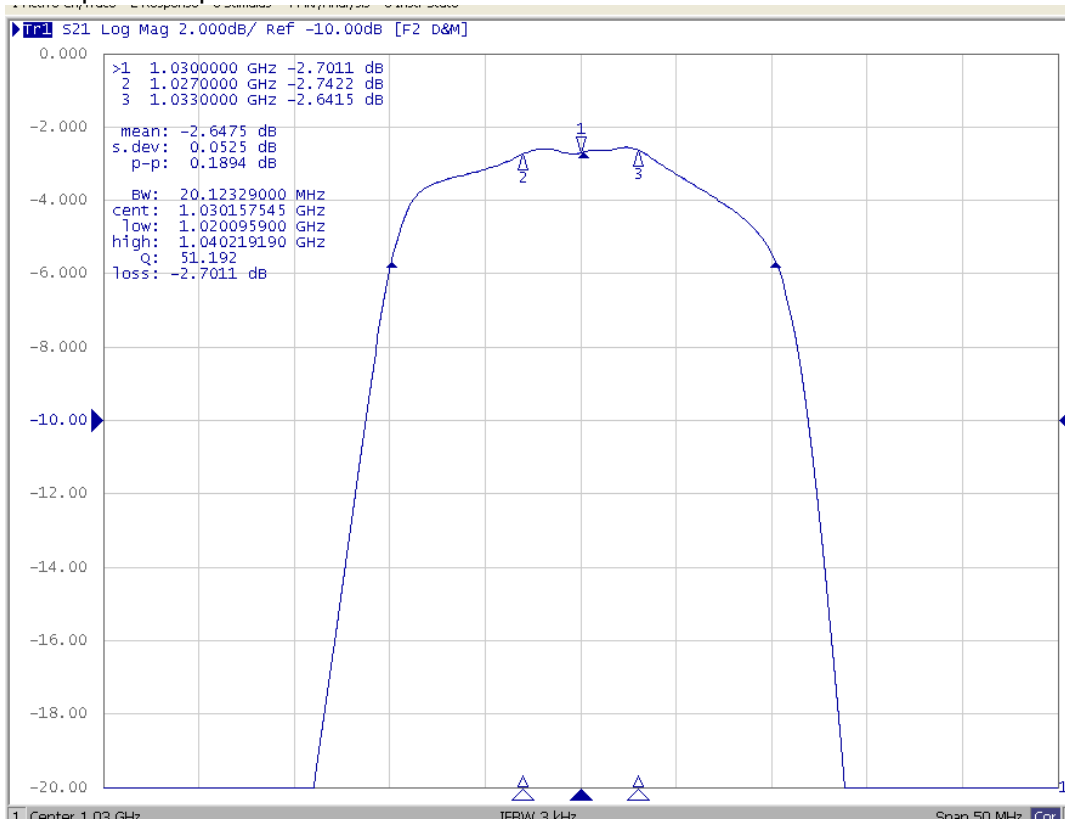


S21 response: 1MHz ~ 2000MHz

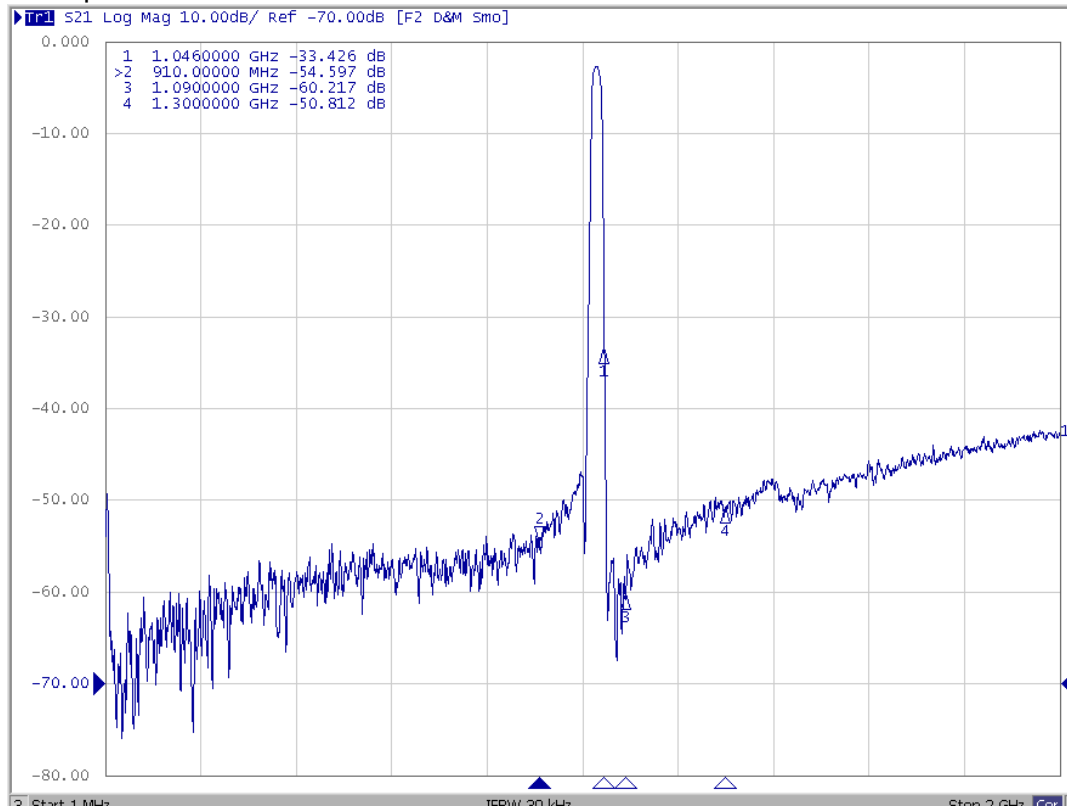

Reflection Functions

S11 VSWR: Center 1030MHz, Span 50MHz

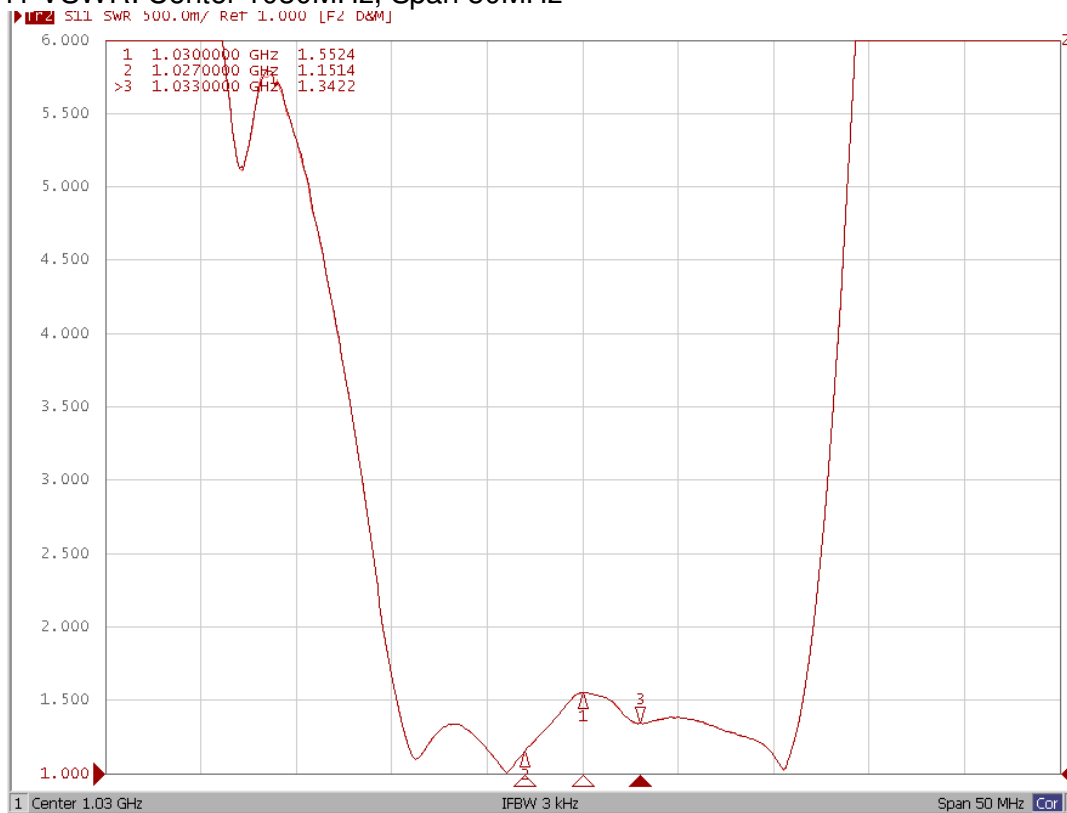


1 1.0300000 GHz 1.5650
2 1.0270000 GHz 1.1868
>3 1.0330000 GHz 1.3940

6.000
5.500
5.000
4.500
4.000
3.500
3.000
2.500
2.000
1.500
1.000

Center 1.02 GHz Span 50 MHz

E.OUTLINE DRAWING:

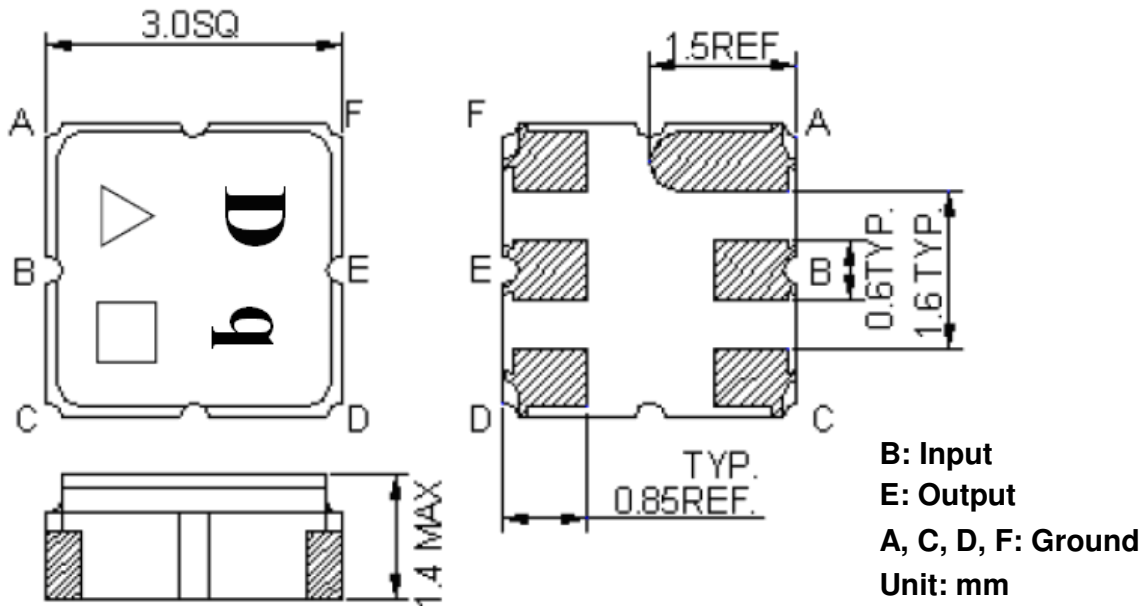


△ : Year Code (2009->9, 2010->0, ..., 2018->8)

□ : Date Code (Follow the table from planner each year)

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z


F. PCB FOOTPRINT:

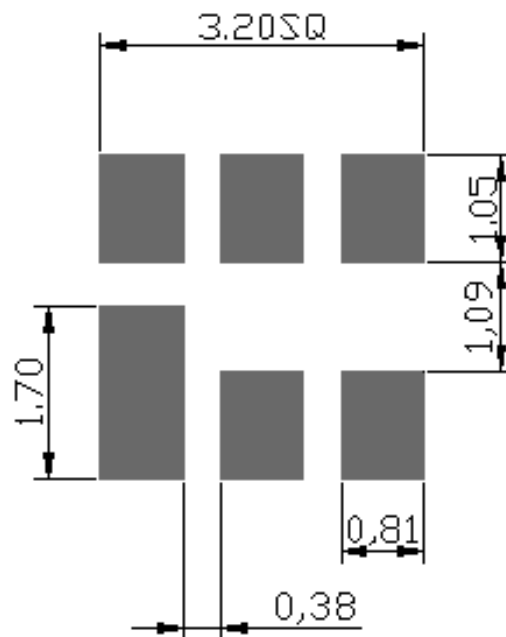


G. PACKING:

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

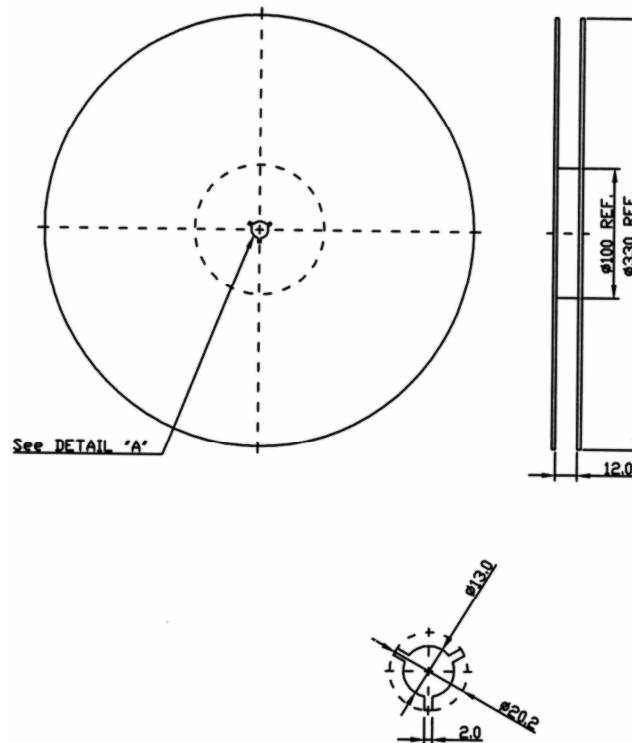

2. TAPE DIMENSION

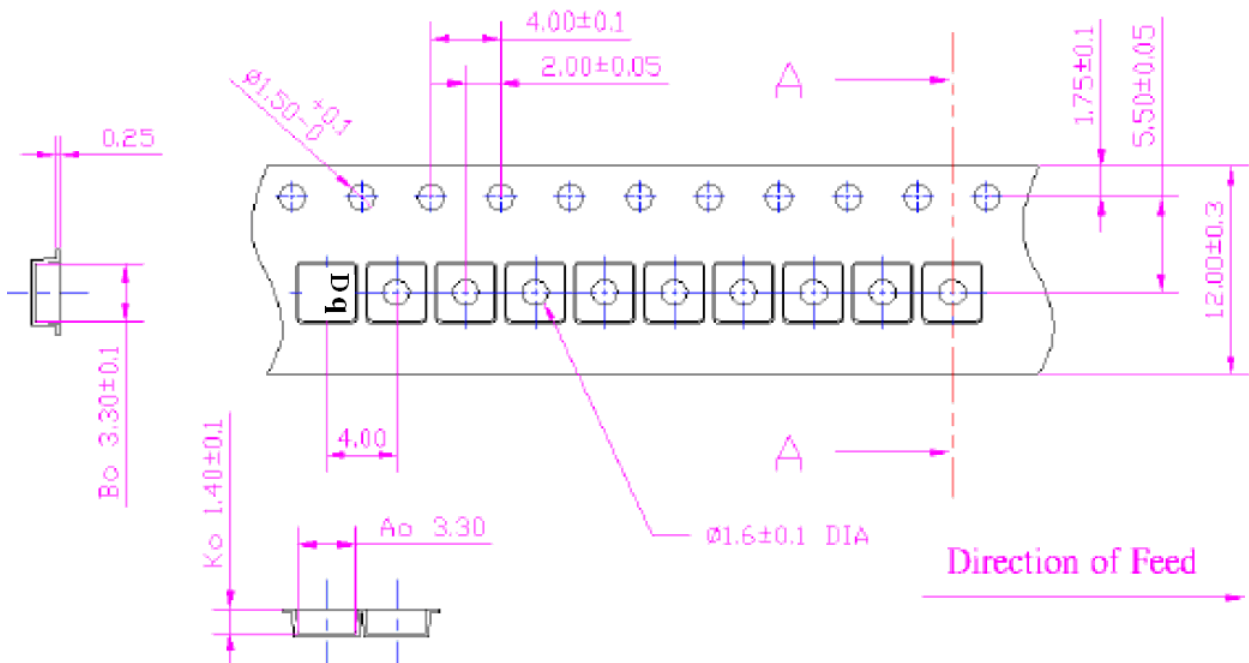

H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (20~40sec).
4. Time: 2 times.

