
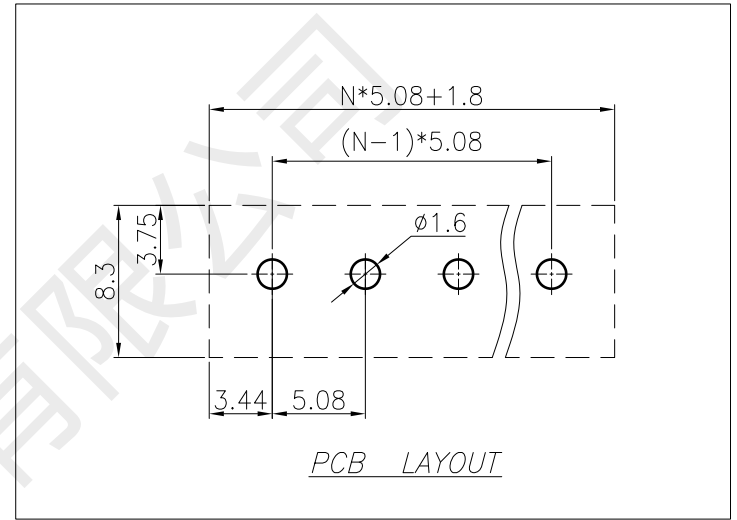
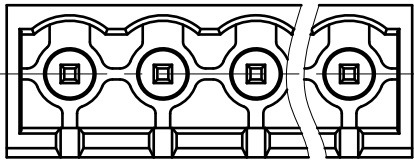
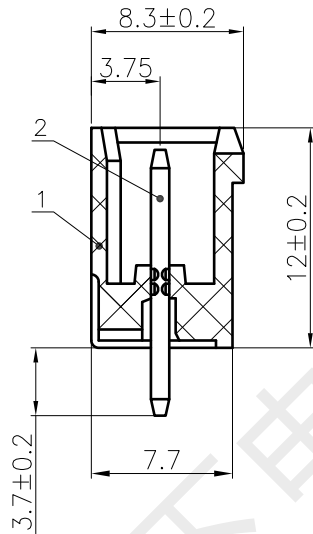


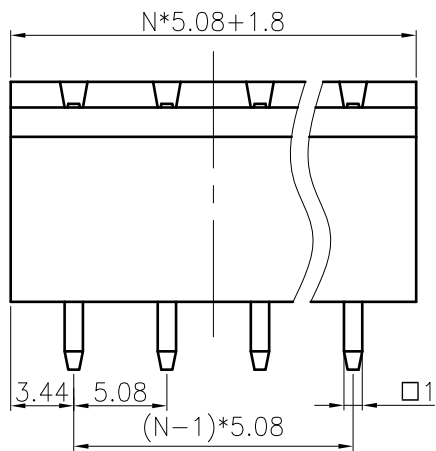

2	YXP001.744.008	插针	黄铜	N	镀镍锡	
1	YXP001.815.001-B	插座	PA66	1	绿色	UL94V-0
序号	图号	名称	材质	数量	电镀/颜色	备注

技术参数:			III/3	III/2	II/2
过压类别/Overvoltage Category/污染等级/Pollution Degree			/	300V/16A	/
额定电压/电流/Rated Voltage(V)/Current(A)			2000		
工频耐压/Withstanding voltage(V/1Min)			4.0		
额定冲击电压(Rated impulse voltage) [KV]			常态≥500MΩ		
绝缘电阻/Insulation resistance			<20mΩ		
接触电阻/Contact resistance			>25N		
单PIN插针强度(保持力)/Binding force(N)			260°C±5°C		
耐焊接热/Resistance to soldering temperature			5.08/N=02~24P		
间距/Pitch(mm)/线数范围/Poles			-40~+105		
使用温度范围/Operating temperature(°C)			湿度≤95%(温度+40°C)		
相对湿度/Relative humidity			Yes		
符合RoHS环保要求/Conform to RoHS					

NAME: 插拔式接线端子(插座)			
NAME: HX-HE040H-5.08-2P			
设计	黄彬	工艺	
审核	张伟	标准化	
批准	罗小春	日期	23.8.21
视角	图幅:A4	比例	2.5:1
页面	1/1	单位:mm	
版本/次:A/0			

	Pitch dimension			Nominal dimension					
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	~ 6	~ 10	~ 24	~ 30	~ 60	~ 100	~ 150	150	
Tolerance	±0.1	±0.15	±0.25	±0.20	±0.3	±0.5	±0.7	±1	0.05/10

标记	处数	变更文件及描述	签字	日期
----	----	---------	----	----