

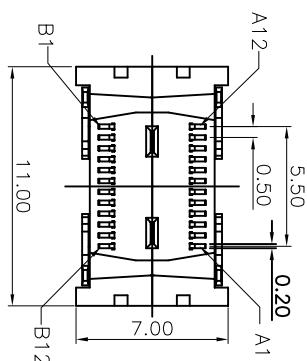
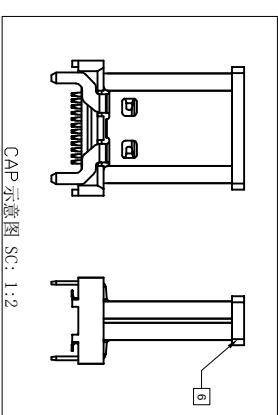
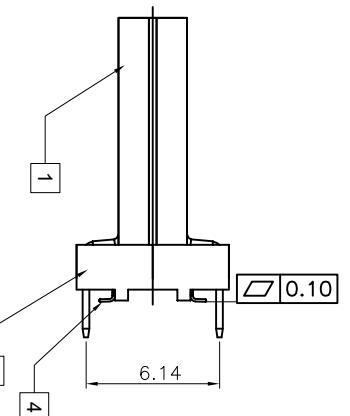


NOTE:

- Contact Resistance: 40mOHM Max.;
- Dielectric Withstanding Voltage: 100V AC For 1 Minute;
- Insulation Resistance: 100M OHM Min.;
- Mating And Unmating Force:
Mating Force: 5~20N
Unmating Force: 8~20N;
- Durability: 10000 Cycles;
- 6~20N AFTER TEST;

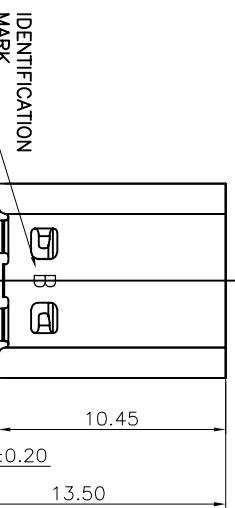

RECOMMEND P.C.B LAYOUT(COMPARTMENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

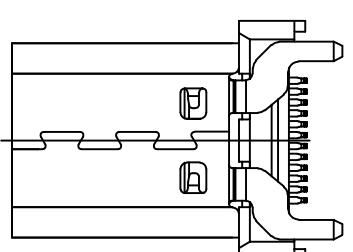

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	SSTx01
A2	B11		SSTx01
A3	SSTx01	B10	SSTx01
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	DP1	B7	DR2
A7	DR1	B6	DP2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSPx02	B3	SSTx02
A11	SSPx02	B2	SSTx02
A12	GND	B1	GND