



1. FIGURE AND DIMENSIONS (图示及尺寸)

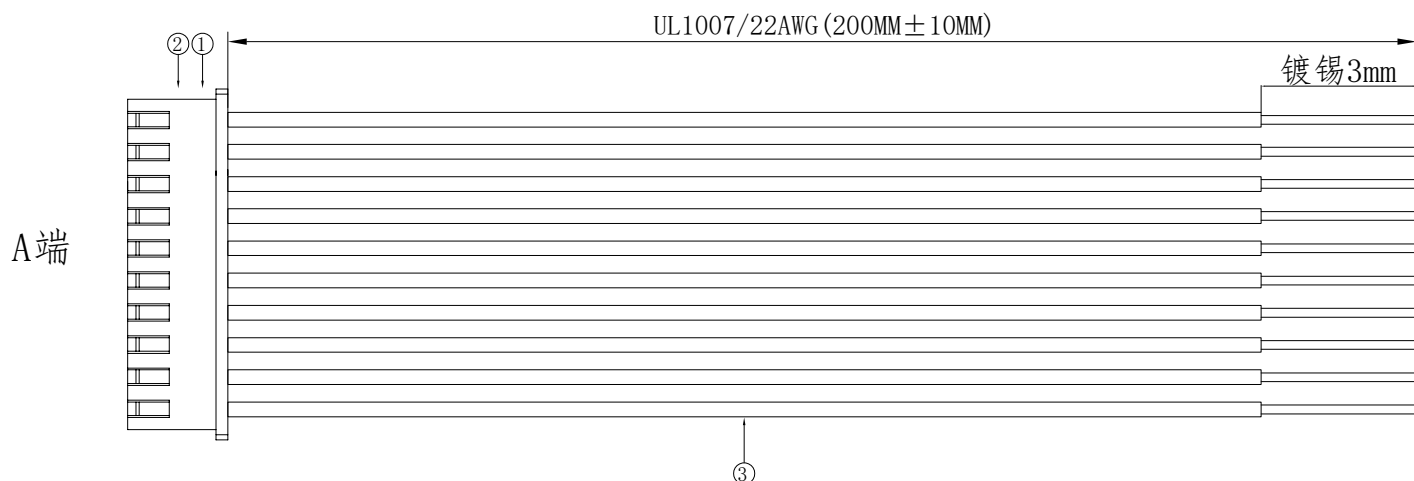

2. CIRCUIT DIAGRAM(接线图)

A端	线材
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

- | | | |
|----|-----|----------|
| 1 | ——— | 红色Red |
| 2 | ——— | 黑色Black |
| 3 | ——— | 黄色Yellow |
| 4 | ——— | 绿色Green |
| 5 | ——— | 蓝色Blue |
| 6 | ——— | 白色White |
| 7 | ——— | 橙色Orange |
| 8 | ——— | 紫色Purple |
| 9 | ——— | 棕色Brown |
| 10 | ——— | 灰色Gray |



A端点位图

3. Final examination(成品检查)

- 1) 100%外形尺寸:所有尺寸与图示一致.
- 2) 外观:a) 电线圆实平滑,颜色均匀,外被表面无破损、划伤、脏污、变形等缺陷;
- 3) 结构:线材和各插头五金以及各接触件应牢固无松动,标志清晰,正确无误;
- 4) 导通性能:100%测试,DC300V,绝缘 $\geq 20\text{M}\Omega$,导通电阻 $< 1\Omega$,无断路或触不良现象,测试时应加摇摆测试.

序列号	名称	规格		数量	备注	
1	胶壳	X8821HM-10-N0		1PCS		
2	端子	X8821TF-PSN		10PCS		
3	线缆	UL1007/22AWG		10PCS	裁线长度：210MM	
			XKB 星城 Connection	DRAWING NO.		RVE.
				X8821胶壳定制线		A0
				UNIT		
RVE.	DESCRIPTION			SCALE	Free	
DESIGNED		DATE		PAGE	1 OF 1	
CHECKED		DATE	X8821T-PSN-10-A22RBYGLW (YR) PNA-L200-T3			
APPROVED		DATE				