

Wire Wound SMD Power Inductor



◆ Features

- 1、Magnetic-resin shielded construction reduces buzz noise to ultra-low levels;
- 2、Metallization on ferrite core results in excellent shock resistance and damage-free durability;
- 3、Closed magnetic circuit design reduces leakage flux and Electro Magnetic Interference (EMI);
- 4、30% higher current rating than conventional inductors of equal size;
- 5、Take up less PCB real estate and save more power.



◆ Applications

- 1、LED Lighting;
- 2、Mobile devices with multifunction such as adding color TV and camera;
- 3、Flat-screen TVs, blue-ray disc recorders, set top boxes;
- 4、Notebooks, desktop computers, servers, graphic cards;
- 5、Portable gaming devices, personal navigation systems, personal multimedia devices;
- 6、Automotive systems
- 7、Telecomm base stations



◆ Lead Free Part Numbering

SLW **5012** **S** **100** **M** **S** **T**
 (1) (2) (3) (4) (5) (6) (7)

- (1) Series Type
- (2) Dimension: L X H
- (3) Material Code
- (4) Inductance: 2R2=2.2μH ;
100=10μH; 101=100μH
- (5) Inductance Tolerance: M=±20%, N=±30%
- (6) Company Code
- (7) Packaging : Tape Carrier Package

◆ Dimensions

Recommended Land Pattern

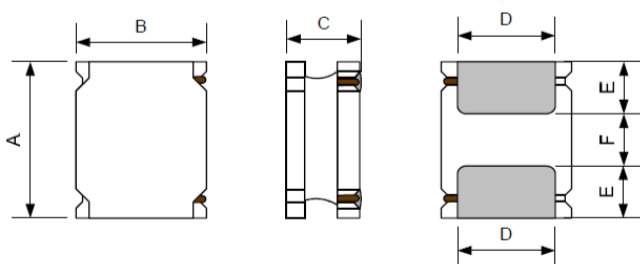


Unit:mm

Series	A	B	C	D	E	F	a Typ.	b Typ.	c Typ.
SLW5012S	5.0±0.2	5.0±0.2	1.2Max.	4.0±0.2	1.25±0.2	2.50±0.2	2.3	1.4	4.2

◆ Electrical Characteristics

- 1) Operating and storage temperature range (individual chip without packing): $-25^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 2) Storage temperature range (packaging conditions): $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$ and RH 70% (Max.)


◆ Construction and material




Code	Part Name	Material Name
①	Ferrite Core	Ni-Zn Ferrite
②	Wire	Polyurethane system enameled copper wire
③	Magnetic Glue	Epoxy resin and magnetic powder
④	Plating Electrodes	Ag
		Ni
		Sn
⑤	Outer Electrodes	Top surface solder coating Sn, Ag, Cu

◆ REFLOW-PROFILE

Limit Profile

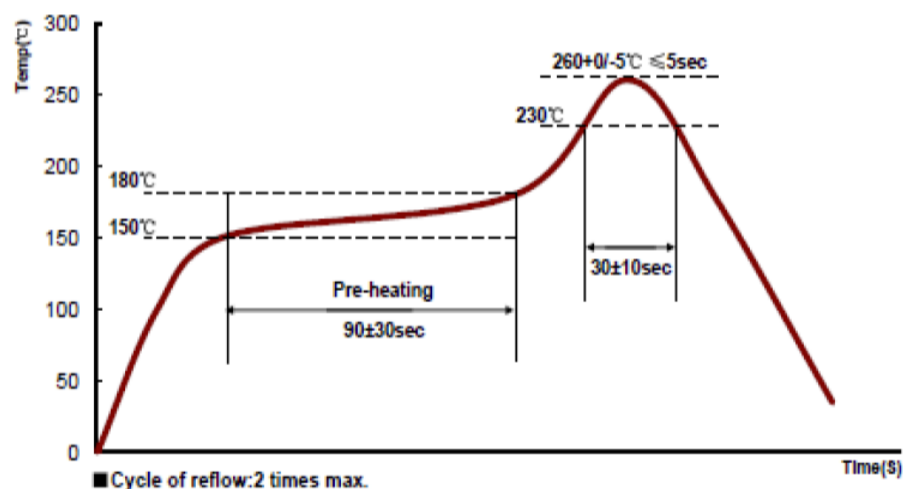

Standard Profile (for EOC Solder paste S70G-HF)

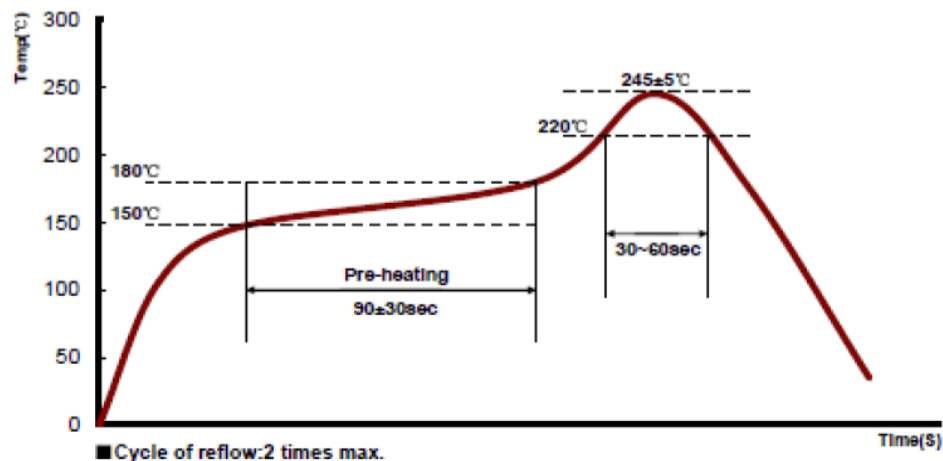

◆ Specification

Part Number	Inductance @100KHz,1 V (μH)	DC Resistance	Min.Self-resonaNST	Saturation	Heat Rating
		±30% (Ω)	Frequency (MHz)	CurreNST(A)	CurreNST (A)
		DCR	S.R.F	Isat	Irms
SLW5012 Series					
SLW5012SR47NST	0.47±30%	0.060	113	5.50	3.00
SLW5012SR68NST	0.68±30%	0.060	110	4.30	2.80
SLW5012S1R0MST	1.0±20%	0.057	103	4.40	2.90
SLW5012S1R2MST	1.2±30%	0.090	73	3.40	2.50
SLW5012S1R5MST	1.5±20%	0.072	68	3.70	2.50
SLW5012S2R2MST	2.2±20%	0.085	50	3.10	2.10
SLW5012S3R3MST	3.3±20%	0.126	34	2.40	1.80
SLW5012S4R7MST	4.7±20%	0.164	31	2.20	1.65
SLW5012S6R8MST	6.8±20%	0.245	22	1.70	1.30
SLW5012S100MST	10±20%	0.344	17	1.40	1.10
SLW5012S150MST	15±20%	0.436	13	1.20	0.90
SLW5012S220MST	22±20%	1.300	10	1.05	0.70


◆ Note

- 1: All test data is referenced to 20°C ambient;
- 2: Rated current: Isat or Irms, whichever is smaller;
- 3: Isat: DC current at which the inductance drops approximate 30% from its value without current;
- 4: Irms: DC current that causes the temperature rise ($\Delta T = 40^{\circ}\text{C}$) from 20°C ambient.

- ◆ Standard Packing Quantity: 1000 pcs/reel
- ◆ TYPICAL ELECTRICAL CHARACTERISTICS

SLW5012 Series

Temperature vs. DC Current Characteristics

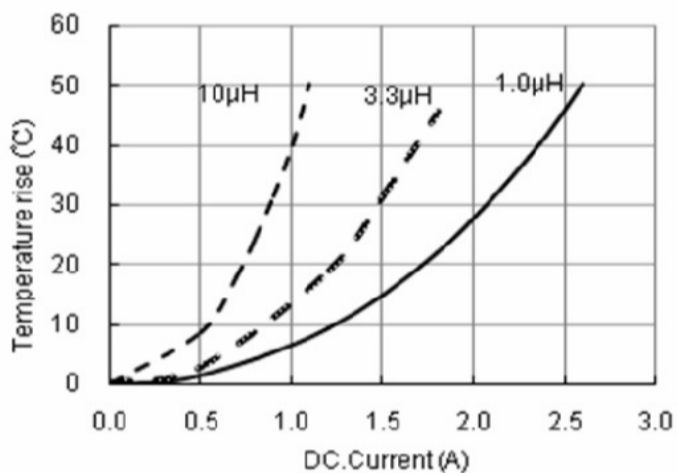

Inductance vs. DC Current Characteristics

