
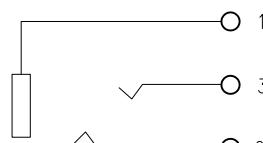
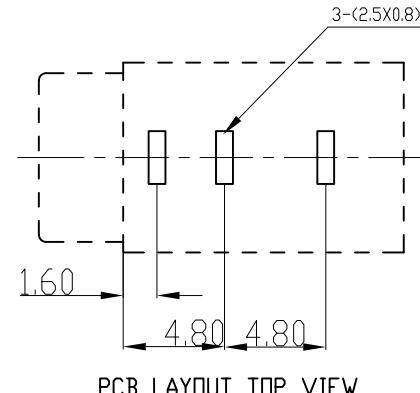
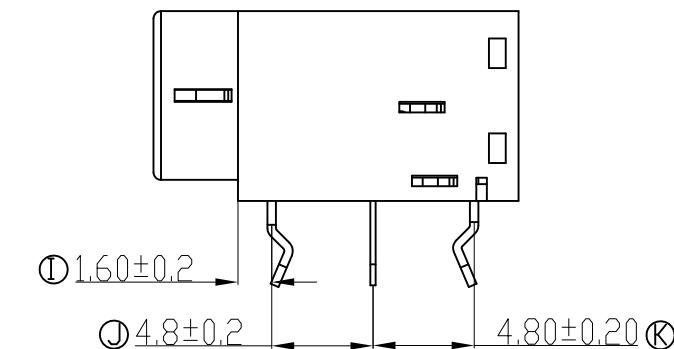
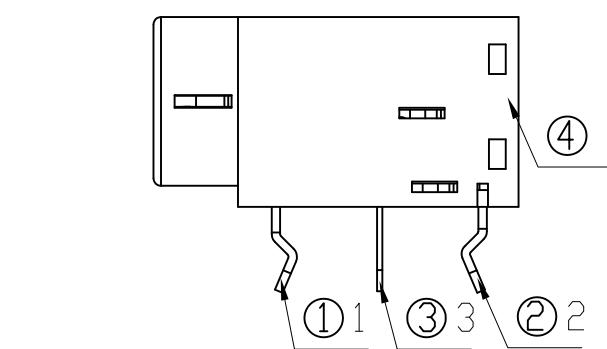
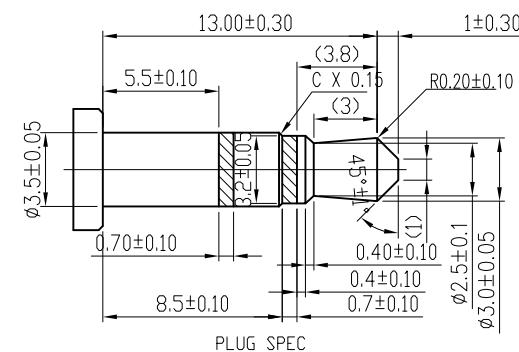
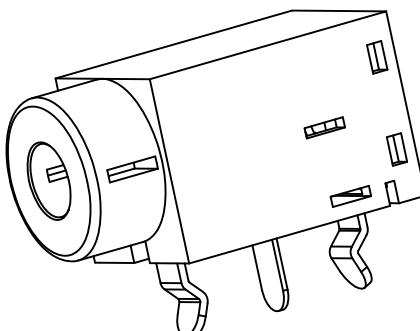
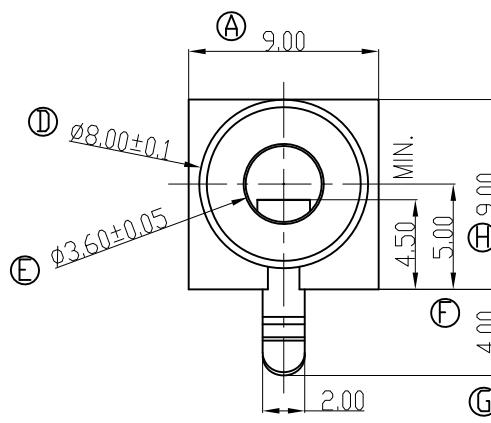


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		增加尺寸标注	Edwin Hou	2010.09.20

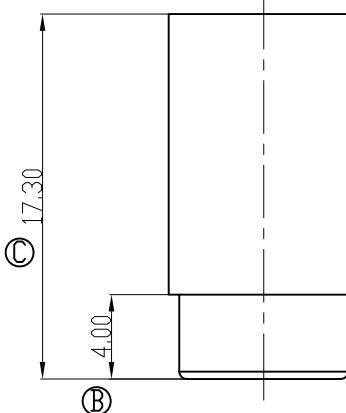

CIRCUIT DIAGRAM

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING:
 - 1-2. CONTACT RESISTANCE: $30m\Omega$ MAX.(INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: $100M\Omega$ MIN. MEASURED BY 500V DC
 2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 0.3~3.0 KGF
 - 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF
 3. LIFE TEST: 5,000 CYCLES MIN.
 4. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 5. * REPRESENT CRITICAL DIMENSIONS

NO.	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		浙江创都电子科技有限公司		
DECIMALS:	ANGLES:	DWG NO.	PART NAME:	
DIM	TOL	DESIGN: Edwin Hou 2010.09.20	DC POWER JACK	
X.	±0.50	CHECK:	PART NO.	PJ-316SS
X.X	±0.30		REV.	UNIT: SHEET: 1/1
X.XX	±0.20	APPROVED	mm	(⊕)
X.XXX	±0.10			