



PCB LAYOUT  
TOP VIEW (TOLERANCE:±0.05)

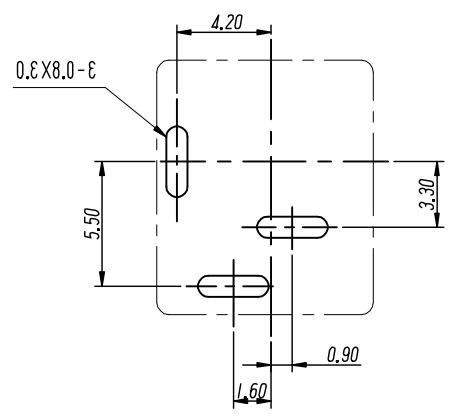

**SCHEMATIC**



**技术特性:**

使用条件: -30~70°  
额定负荷: DC30V 2A  
接触电阻: ≤0.02Ω  
绝缘电阻: ≥100mΩ DC250V  
耐压: AC250V(50Hz)/min  
插拔力: 3~15N  
寿命: 5000次

6	弯片	1	H62黄铜带(Y) δ=0.30mm	铜锡
5	插针	1	H62黄铜棒	铜锡
4	后盖	1	PBT	黄
3	平片	1	H62黄铜带(Y) δ=0.30mm	铜锡
2	黄片	1	65Mn 锰钢带δ=0.20mm	铜锡
1	底座	1	PBT	黑
序号	名称	数量	材料	备注

GENERAL TOLERANCES			
0.X	±0.30	X°	±3°
0.XX	±0.20		
0.XXX	±0.10	X.X°	±1°
UNIT	SIZE	SCALE	
MM	A4	1:1	

DRAWN		C	TITLE: 电源插座
DESIGN			PART NO. DC-012-2.0-MN
CHECKED			PRODUCT NO.
APPROVED			DRAWING NO.
UNIT: mm SCALE: 1:1 REV: 01-1 SHT: 1 OF 1			

ECN NO.	REV	DATE	DESCRIPTION	MDF'D	APP'D
	02	2025.05.26	更新盖板结构		
	01	2022.04.27	NEW DRAWING RELEASE		

浙江创都电子科技有限公司