

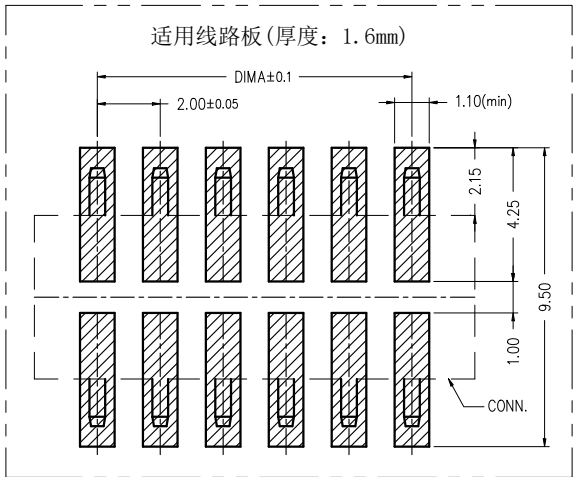
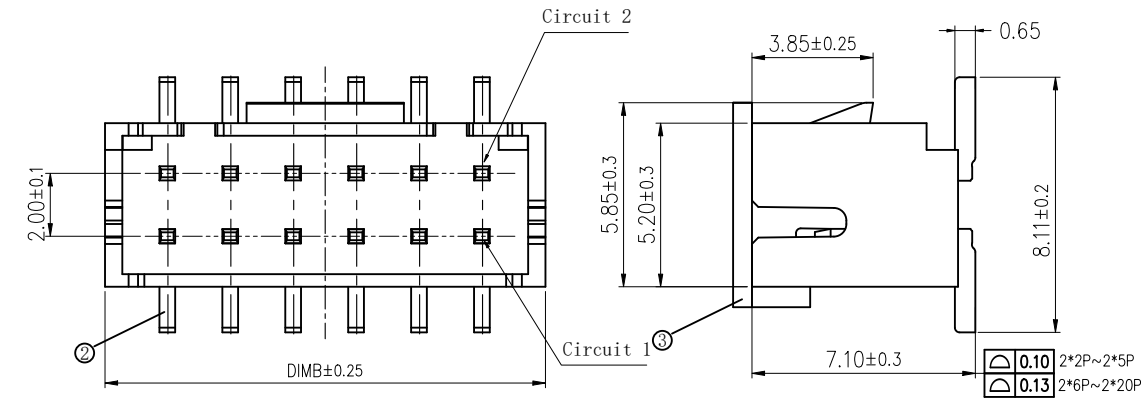
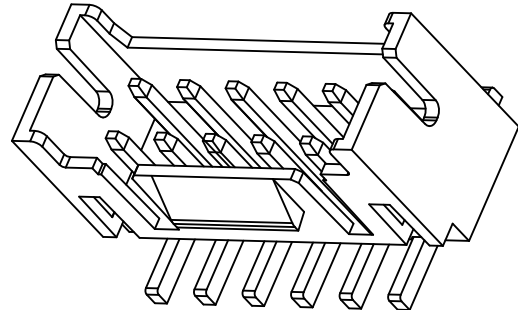


| 版次 | 变更摘要 | 日期 | 序号 | 品名 | 材质 |
|----|-------|------------|----|---------------|----------------|
| 0 | 新产品发行 | 2021/01/23 | ① | PHDC立贴WTB胶芯 | LCP UL94V-0 本色 |
| 1 | 料号更新 | 2024/12/13 | ② | 2.0D型立贴(连绕)端子 | 铜合金/表面镀锡 |
| | | | ③ | PHD2.0立贴WTB吸盖 | LCP UL94V-0 本色 |

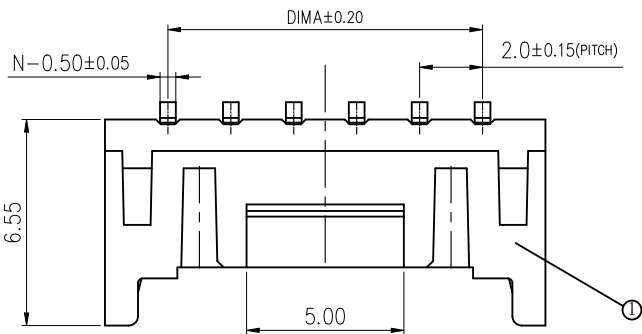

| CKT | A | B |
|------|------|------|
| 2*2 | 2.0 | 6.0 |
| 2*3 | 4.0 | 8.0 |
| 2*4 | 6.0 | 10.0 |
| 2*5 | 8.0 | 12.0 |
| 2*6 | 10.0 | 14.0 |
| 2*7 | 12.0 | 16.0 |
| 2*8 | 14.0 | 18.0 |
| 2*9 | 16.0 | 20.0 |
| 2*10 | 18.0 | 22.0 |
| 2*11 | 20.0 | 24.0 |
| 2*12 | 22.0 | 26.0 |
| 2*13 | 24.0 | 28.0 |
| 2*14 | 26.0 | 30.0 |
| 2*15 | 28.0 | 32.0 |
| 2*16 | 30.0 | 34.0 |
| 2*18 | 34.0 | 38.0 |
| 2*20 | 38.0 | 42.0 |

- 技术指标(Technical Index):
- 工作温度(Temperature range): -25° C~+85° C.
 - 适用线规(Apply to gauge): AWG#28~#22
 - 额定电压(Rated voltage): 250V DC/AC(rms).
 - 额定电流(Rated current): 3.0A AC, DC.
 - 接触电阻(Contact resistance): ≤20mΩ.
 - 耐压值(Dielectricwithstanding voltage): 800V AC/minute.
 - 绝缘电阻(Insulation resistance): ≥1000MΩ.
 - 产品料号(Product material No.):

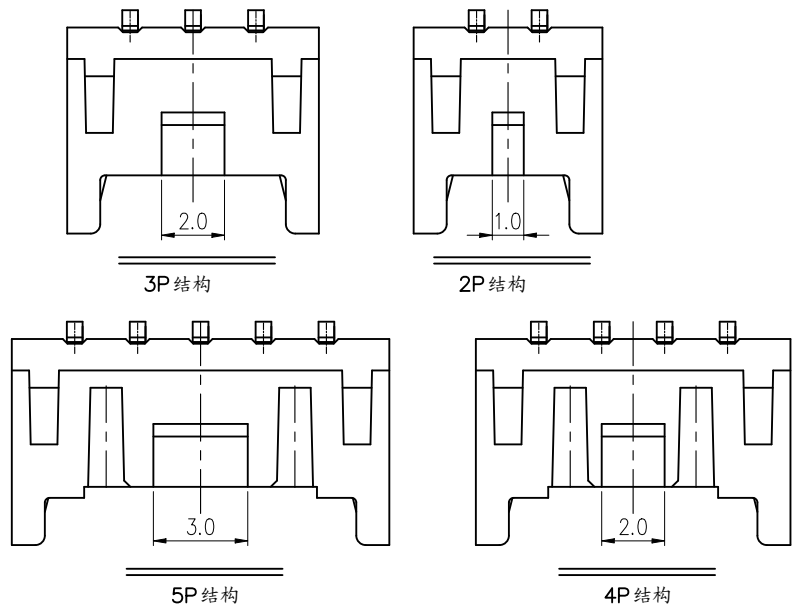

WB200C1L—** * *—***
NO OF CKT (产品PIN数) 流水码
Plating (电镀方式) Packing (包装方式)
0: 端子全雾锡
1: 端子全金 (G/F OVERALL)
3: 端子全亮锡



ZGWD 浙江温达电子有限公司
ZHEJIANG WENDA ELECTRONICS CO.,LTD

品名 (TITLE)
2.0 Pitch C型双排立贴WTB业务图

料号 (DWG.NO)
WB200C1L-****-****

比例 (SCALE)

制图 (DR)
ANLAN

校对 (CHKD)
田峰

审核 (APPD)
黄志明

单位 (UNITS)
mm

张数 (SHEET)
1 OF 1

SIZE
A4

REV
A

| 一般公差 (TOLERANCE) | | | |
|------------------|-----------|--|--|
| X. ±0.50 | .XX ±10 | | |
| X. ±0.20 | .XXX ±0.5 | | |
| ANGLES | ±1° | | |