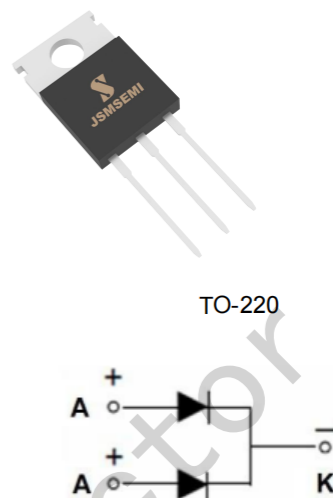


●Features:

- Common Cathode Structure
- Low Power Loss and High Efficiency
- Low Forward Voltage Drop
- High Surge Capability

●Application:

- High Frequency Switch
- Free Wheeling, and Polarity Protection Applications


Absolute Maximum Ratings (Tc=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{RRM}	Maximum Repetitive Reverse Voltage	100	V
V_R	Maximum DC Reverse Voltage	100	V
$I_{F(AV)}$	Average Rectified Forward Current, Tc=120°C	20(Per Leg) 40(Per Device)	A
I_{FSM}	Peak Forward Surge Current, 8.3ms Half Sine wave	250	A
T_j	Operating Junction Temperature	150	°C
T_{stg}	Storage Temperature Range	-55 to +150	°C

Thermal Characteristics (Tc=25°C unless otherwise noted)

Symbol	Parameter	Max	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case Per Leg	2.0	°C /W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient Per Leg	84	°C /W

Electrical Characteristics (Tc=25°C unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Max	Unit
V_{RRM}	Maximum Repetitive Reverse Voltage	$I_R = 100\mu A$	100		V
I_R	Reverse Current	$V_R = 100V$ Tc=25°C $V_R = 100V$ Tc=125°C		0.1 5	mA
V_F	Forward Voltage	$I_F = 20A$ Tc=25°C $I_F = 20A$ Tc=125°C $I_F = 40A$ Tc=25°C $I_F = 40A$ Tc=125°C		0.85 0.75 1.00 0.90	V

Typical Performance Characteristics

Figure 1. Forward Current Characteristics

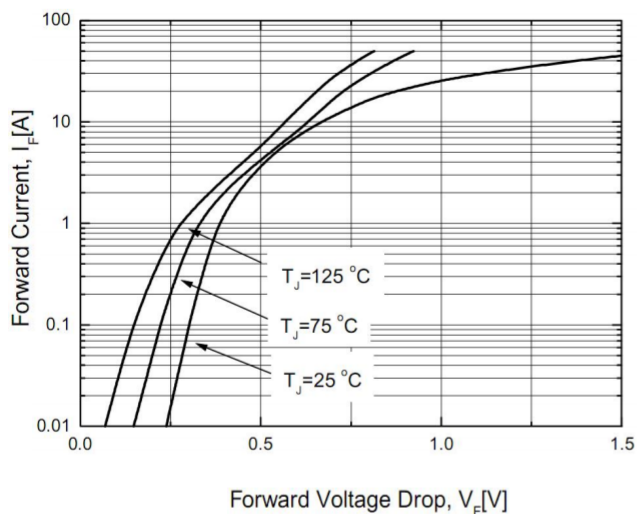


Figure 2. Reverse Leakage Current

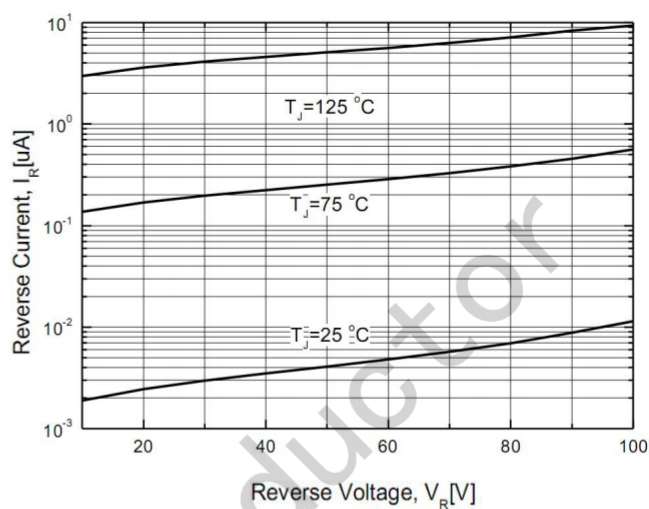


Figure 3. Junction Capacitance



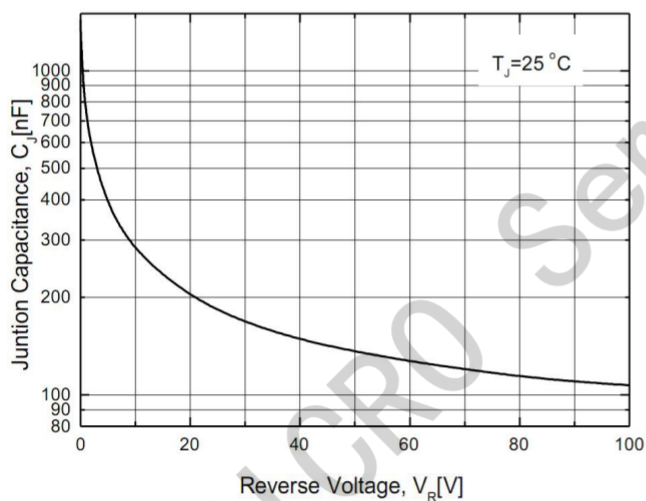


Figure 4. Power Derating

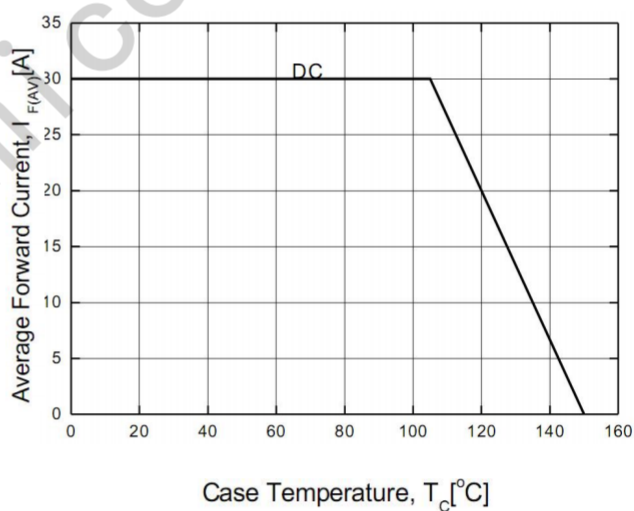

Package Information

TO-220

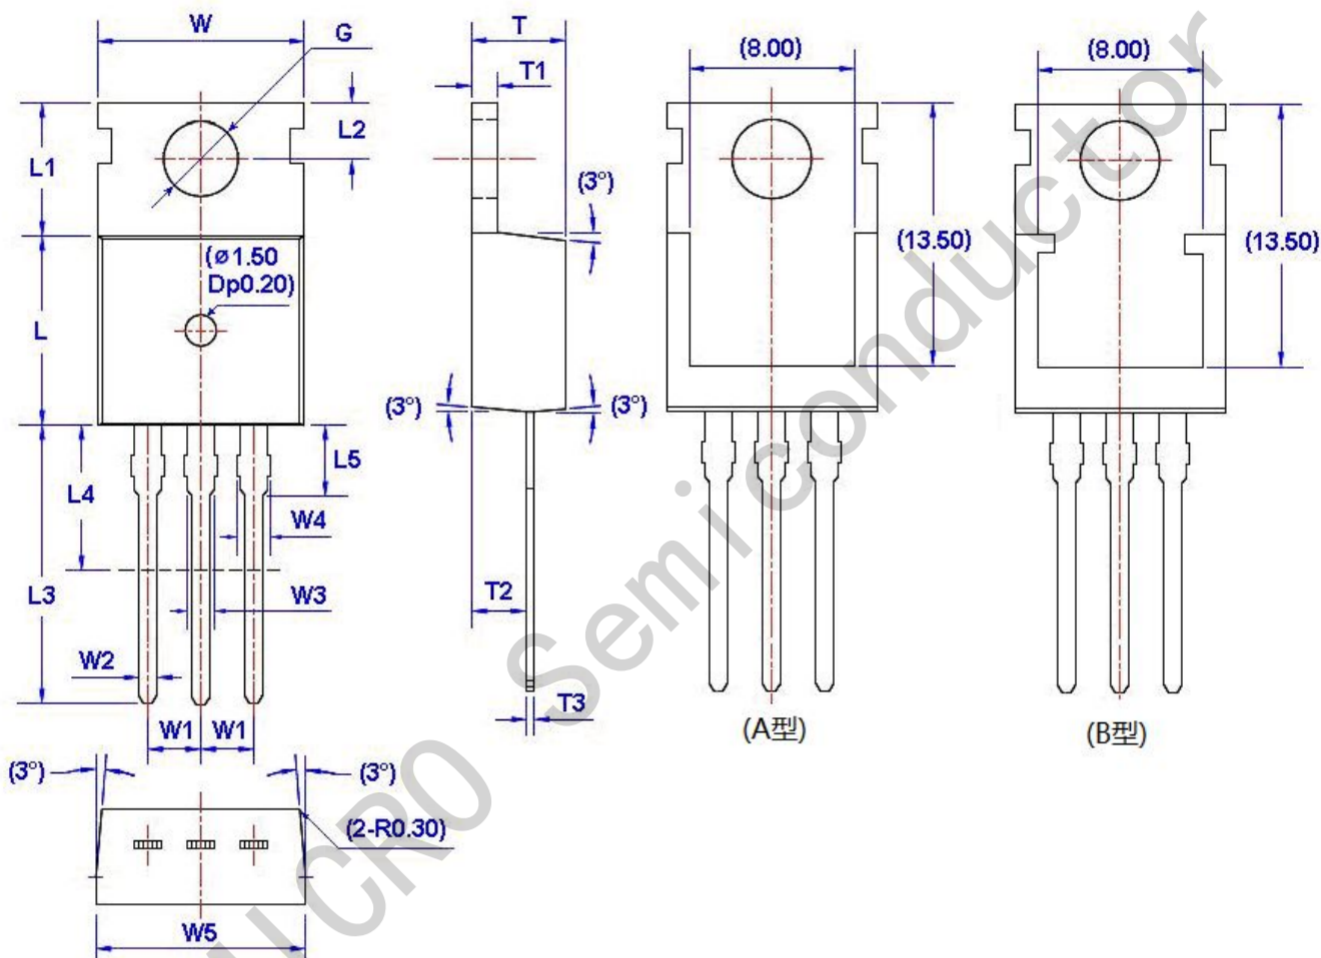

Unit: mm

Symbol	Size		Symbol	Size		Symbol	Size		Symbol	Size	
	Min	Max		Min	Max		Min	Max		Min	Max
W	9.66	10.28	W5	9.80	10.20	L4**	6.20	6.60	T3	0.45	0.60
W1	2.54 (TYP)		L	9.00	9.40	L5	2.79	3.30	G(Φ)	3.50	3.70
W2	0.70	0.95	L1	6.40	6.80	T	4.30	4.70			
W3	1.17	1.37	L2	2.70	2.90	T1	1.15	1.40			
W4*	1.32	1.72	L3	12.70	14.27	T2	2.20	2.60			