
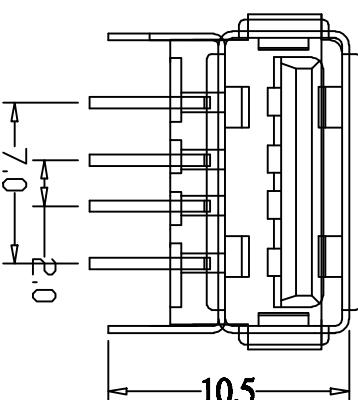


项目	说明	日期	绘图人	批准

规格说明:Specifications:

电气特性:Electrical:

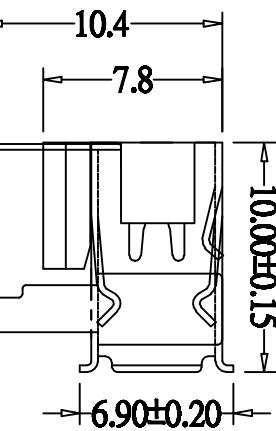

物理特性:Mechanical:

1. 插拔力: Connector Mate and Unmate Force

Mate force: 3.57kgf(MAX)

Unmate force: 1.02kgf(MIN)

2. 终子保持力: Terminal Retention

1.0kgf(MIN)

原材料:Material:

Hinge Temperature Thermoplastics,

2. 接触:Contact: Copper Alloy C2680

3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 接触:Contact: Plated Gold in Mating Area



Tin On Solder Tails

端子四周镀50U”(MIN)镀,镀金区域镀100-200U”镀金1U”

2. 外壳:Shell:

铜壳四周镀80U”(MIN)镀

Nickel Plating

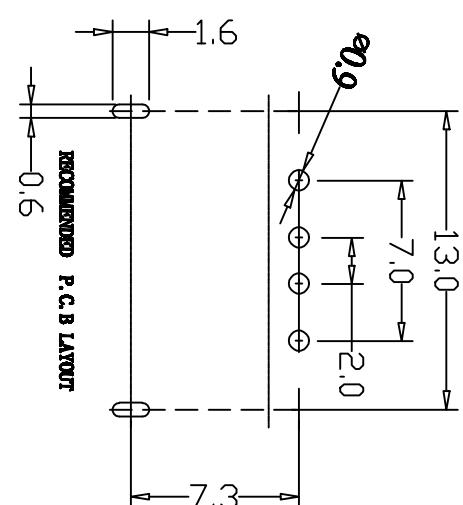

RECOMMENDED P.C.B LAYOUT

MANUFACTURE DRAWING

TOLERANCE

UNLESS OTHERWISE

SPECIFIED

IN

DRAWING

UNIT

MM

DRAWING

DWG NO.

F123-354F411078-013

DATE

2016.10.20

DRAWING

NAME

LIUFU

DESIGN

SCALE

1:1

DRAWING

005

SHEET

005

APPROVE

VIEW

⊕

□

AO

SHEET

005

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F

F