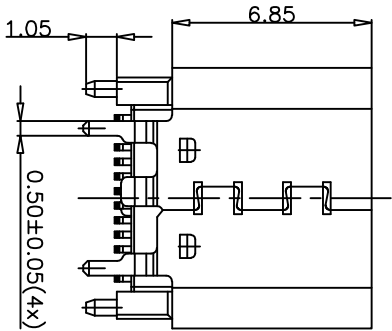
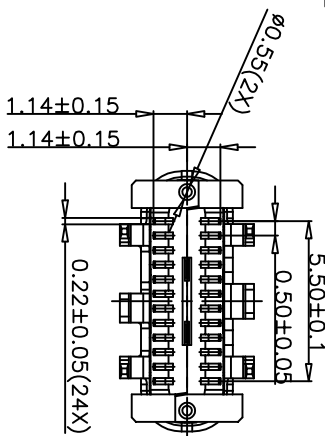
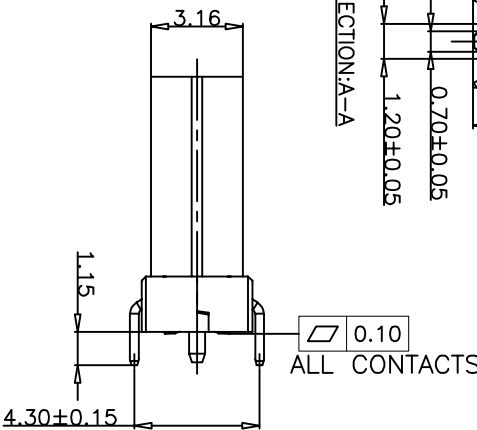
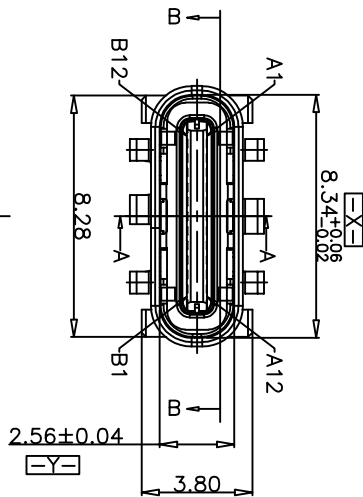

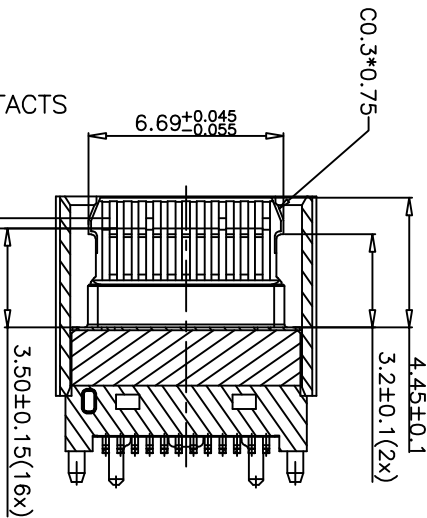
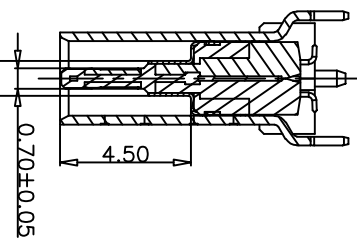
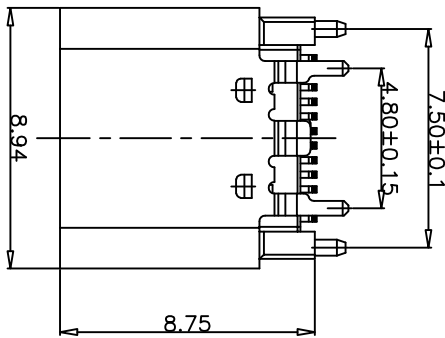




NO.	PART NAME	MATERIAL	FINISH
5	GROUND	STAINLESS STEEL	CLEAN
4	MID-PLATE	STAINLESS STEEL	CLEAN
3	OUTER SHELL	STAINLESS STEEL	UNDER PLATED: 30u"
2	CONTACTS	COPPER ALLOY	CONTACT AREA AU 1u"/30u" NI ALL OVER/ AU G/P SOLDER TAIL.
1	HOUSING	LCP	BLACK, UL 94V-0

TOLERANCE		NAME(INTENDED USE)	
X.X ±0.30	X.X' ±10°	CUSTOMER DRAWING	
.XX ±0.20	.X' ± 8°	TITLE:	
.XXX ±0.10	.XX' ± 5°	FY23-68TC24F488-50 USB5.0 TYPE-C24P立贴8.8高频80G	
UNITS	mm	DESIGN:	ZXM
MATERIAL	---	CHED:	
FINISH	---	APPD:	
		DRAWG NO.	FY23-68TC24F488-50
		SCALE	1:1
		SHEET	1/2
		REV.	A

Pinpoint 广东富源兴精密科技实业有限公司
Guangdong Pinpoint Precision Electronic Technology Co., Ltd.

包装规范说明:

1. 如图所示首先CARRIER TAPE (载带) 需先预留18PCS空格后方可置入成品, 并附COVER TPAE(上带) 覆盖于上, 再配合带装机自动卷绕于REEL (塑胶卷轴) 收料.
As shown from picture, the initial starting carrier need to be emptied for 18 pcs, then put connector on 1nth carrier; Then cover it with Cover Tape, and Reeling it with Reel auto machine.
2. 在定量包装完成后, 前端CARRIER TAPE亦需预留18PCS空格, 而COVER TAPE配合CARRIER TYPE长度覆盖后, 并须再超出200mm以上, 最后以胶纸贴固, 并于REEL盘上方贴合格标签1张.
In the end of the Reel, need to empty 18 pcs carrier tape; After covering the carrier, then the Cover Tape need to be 200mm longer, and use tape to fix the cover tape to the reel. Put "Qualified label" on the Reel.
3. 注意: COVER TAPE不可浮起或有贴附不顺, 歪斜及成品放置方向错误之现象. 卷盘最外层需缠绕一圈保护带, 再按图示贴3处美纹胶. Attention: no deformation of Cover Tape is allowed (protuded plastic, or not smooth, bednt or product is wrong positioned), The out layer of the reel needs to be wound with a protective tape, and 3 places of masking tape are attached as shown in the figure.
4. 在纸箱内左右, 前后侧各放入一块三角卡板, 每个PE袋中装入5个REEL盘, 并在PE袋中放入2PCS干燥剂, 用胶带封好. 在每个纸箱内装入10PCS卷盘, 共2叠. 纸箱内上下各垫一张平卡, 盖上箱盖后以胶带封箱, 于侧位置贴出货标签一张. Inside of carton, at left and right side, put triangle fixed card; Put 5 Reels to PE bag, and put 2bags of desiccant inside the PE bag. Each carton has 10 reels. Put "Delivery label" on side of the carton.
5. 零箱部分, 出货时须用缓冲物填满.
The fractional box must be filled by cushion before shipment.

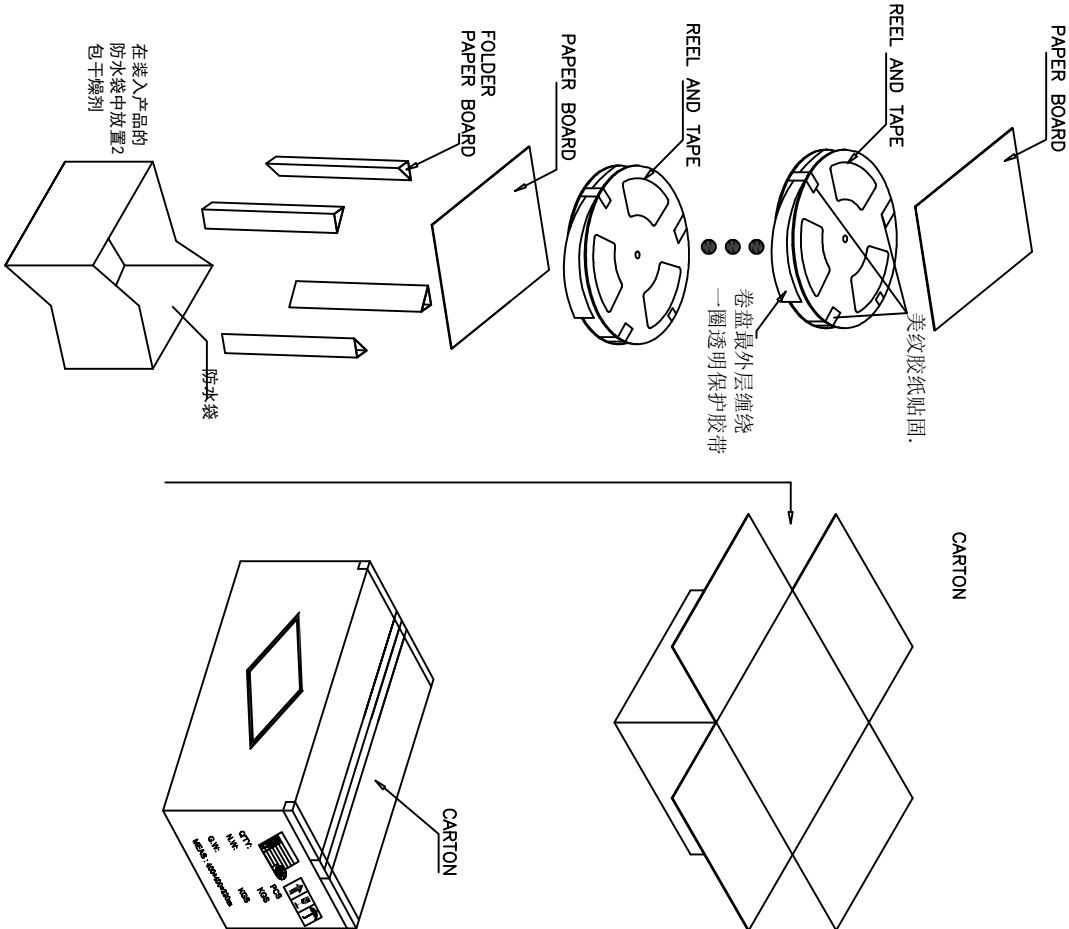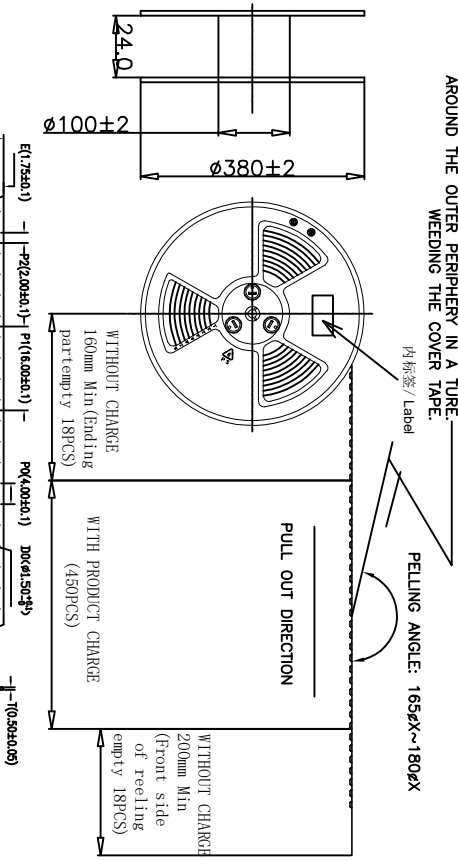

TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING		TITLE:	
X.X	±0.30 X.°	±10°	PART NO.	FY23-68TC24F488-50 USB5.0 TYPE-C24P立贴8.8高频80G	
.XX	±0.20 .X.°	± 8°	DESIGN:	ZXM	
.XXX	±0.10 .XX°	± 5°	DRAWG NO.	FY23-68TC24F488-50	
UNITS	mm		CHED:		
MATERILA	----		APPD:		
FINISH	----				

FUYOU 广东富盈兴业精密科技实业有限公司
Guangdong FUYOU Precision Electronic Technology Co.,LTD.

SCALE	1:1
SHEET	1/2
REV.	A