


A B C D E F

版次	变更摘要	日期
0	新产品发行	2019/11/25

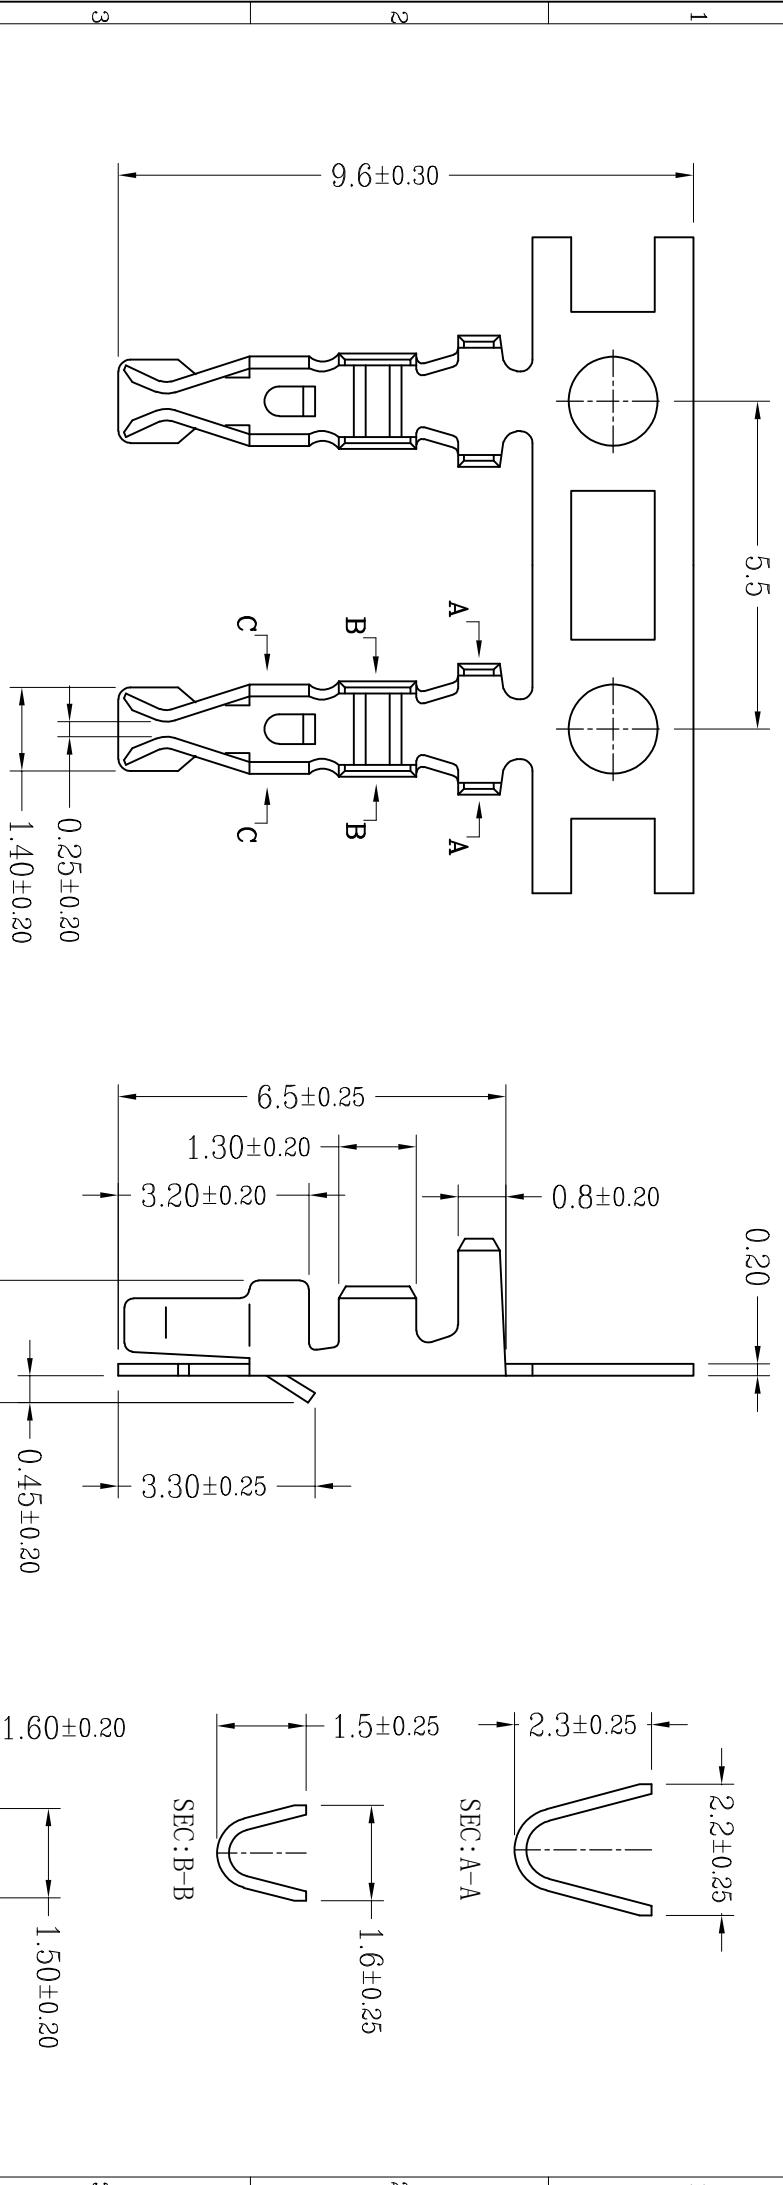

技术指标 (Technical Index):

1. 工作温度 (Temperature range): -25° C ~ +85° C.
2. 额定电压 (Rated voltage): 250V DC/AC.
3. 额定电流 (Rated current): 3.0A.
4. 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$.
5. 耐压值 (Dielectric withstand voltage): 800V AC/minute.
6. 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$.
7. 适用线规 (Apply to gauge): AWG#22~#28.
8. 品料号 (Product material No.): WT200R0-T 0 * * - *

ZGWD 浙江温达电子有限公司

ZHEJIANG WENDA ELECTRONICS CO., LTD

Material (端子材料) ┌ ┌ Plating (端子状态&电镀方式)

磷青铜 ┌ ┌ 4: 端子全亮锡



A B C D E F

一般公差 (TOLERANCE)		制图 (DR)	ANLAN
X ± 50	XX ± 10		
X ± 20	XXX ± 05	审核 (APPD)	黄志明
X ± 10	XXX ± 05	审核 (APPD)	黄志明

料号 (DWG.NO) WT200R0-T0*-*

比例 (SCALE) 1:1

单位 (UNITS) mm

张数 (SHEET) 1 OF 1

SIZE REV A4 A

5