


P-Ch 100V Fast Switching MOSFETs
Applications

- High Frequency Switching and Synchronous Rectification.
- DC/DC Converters.
- Power Tool Application.

Product Summary

V_{DS}	-100	V
$R_{DS(ON),typ}$	12	m Ω
I_D	-130	A

- 100% EAS Guaranteed
- Green Device Available
- Fast Switching Speed
- Advanced high cell density Trench technology

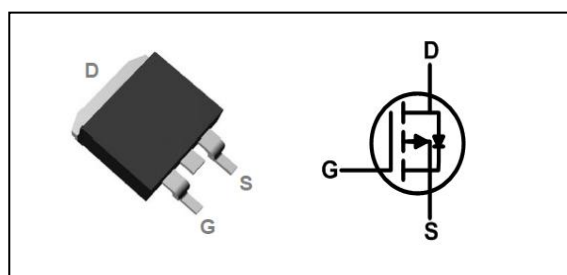TO-263 Pin Configuration

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-100	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D@T_C=25^\circ\text{C}$	Continuous Drain Current, V_{GS} @ -10V ¹	-130	A
$I_D@T_C=100^\circ\text{C}$	Continuous Drain Current, V_{GS} @ -10V ¹	-78	A
I_{DM}	Pulsed Drain Current ²	-400	A
EAS	Single Pulse Avalanche Energy ³	1510	mJ
I_{AS}	Avalanche Current	-140	A
$P_D@T_C=25^\circ\text{C}$	Total Power Dissipation ⁴	250	W
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient ¹	---	62	$^\circ\text{C/W}$
$R_{\theta JC}$	Thermal Resistance Junction-Case ¹	---	0.6	$^\circ\text{C/W}$

P-Ch 100V Fast Switching MOSFETs
Electrical Characteristics ($T_J=25\text{ }^{\circ}\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=-250\mu A$	-100	---	---	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance ²	$V_{GS}=-10V$, $I_D=-20A$	---	12	15	$m\Omega$
$R_{DS(ON)}$	Static Drain-Source On-Resistance ²	$V_{GS}=-4.5V$, $I_D=-20A$	---	13	16	$m\Omega$
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=-250\mu A$	-1	-1.9	-2.5	V
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=-100V$, $V_{GS}=0V$, $T_J=25^{\circ}\text{C}$	---	---	-1	μA
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V$, $V_{DS}=0V$	---	---	± 100	nA
R_g	Gate Resistance	$V_{DS}=0V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	1	---	Ω
Q_g	Total Gate Charge	$V_{DS}=-50V$, $V_{GS}=-10V$, $I_D=-20A$	---	230	---	nC
Q_{gs}	Gate-Source Charge		---	18	---	
Q_{gd}	Gate-Drain Charge		---	13	---	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=-50V$, $V_{GS}=-10V$, $R_G=3.3\Omega$, $I_D=-20A$	---	29	---	ns
T_r	Rise Time		---	82	---	
$T_{d(off)}$	Turn-Off Delay Time		---	76	---	
T_f	Fall Time		---	92	---	
C_{iss}	Input Capacitance	$V_{DS}=-50V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	23250	---	pF
C_{oss}	Output Capacitance		---	523	---	
C_{rss}	Reverse Transfer Capacitance		---	475	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current ^{1,5}	$V_G=V_D=0V$, Force Current	---	---	-100	A
V_{SD}	Diode Forward Voltage ²	$V_{GS}=0V$, $I_S=-1A$, $T_J=25^{\circ}\text{C}$	---	---	1.2	V
t_{rr}	Reverse Recovery Time	$I_F=-20A$, $di/dt=-100A/\mu s$, $T_J=25^{\circ}\text{C}$	---	70	---	nS
Q_{rr}	Reverse Recovery Charge		---	140	---	nC

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 20Z copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$
- 3.The EAS data shows Max. rating . The test condition is $V_{DD}=-60V$, $V_{GS}=-10V$, $L=0.5mH$, $I_{AS}=-140A$
- 4.The power dissipation is limited by 150°C junction temperature
- 5.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.



Typical Characteristics

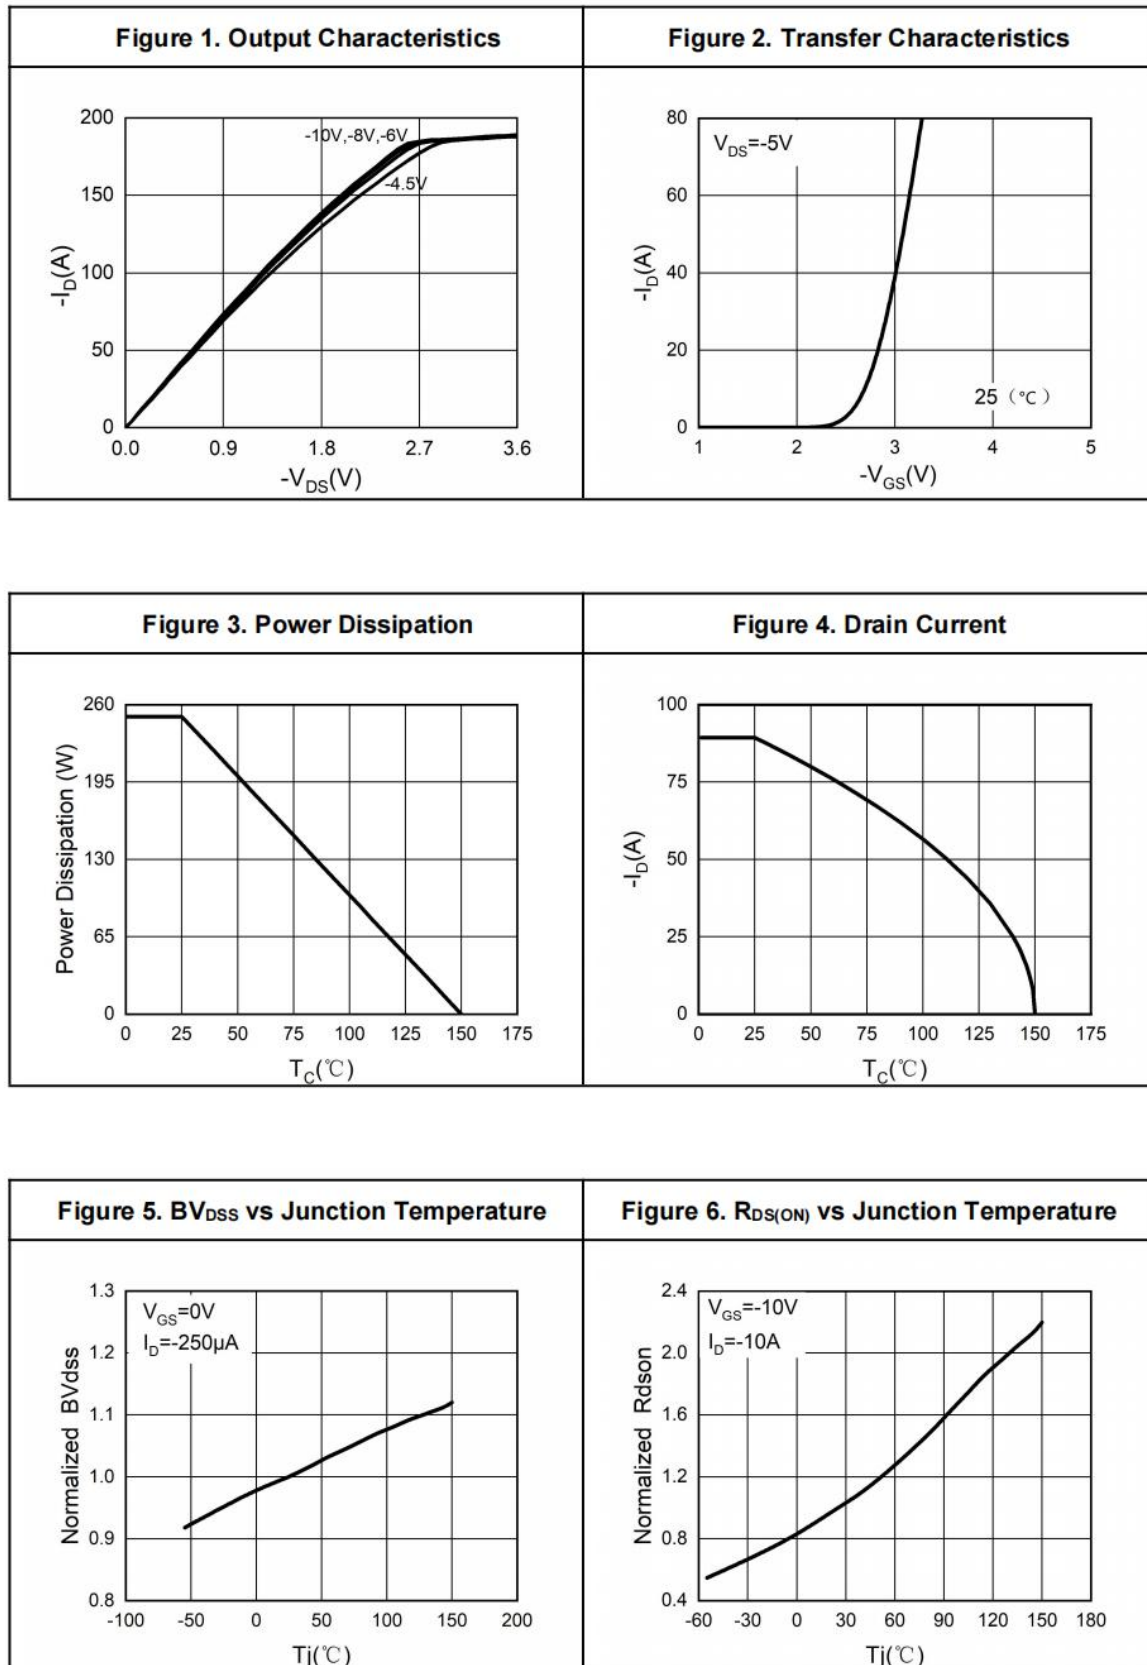




Figure 7. Gate Charge Waveforms

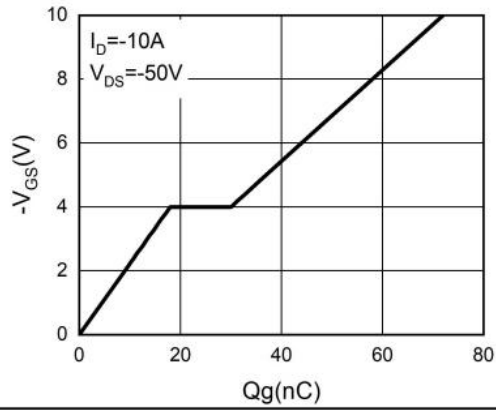


Figure 8. Capacitance

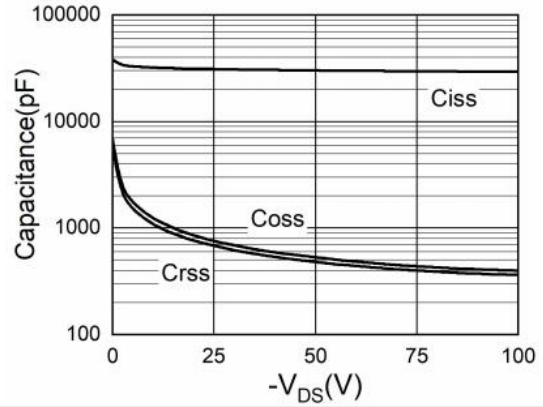


Figure 9. Body-Diode Characteristics



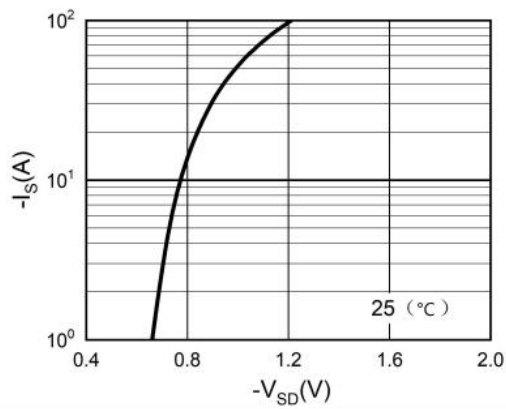


Figure 10. Maximum Safe Operating Area

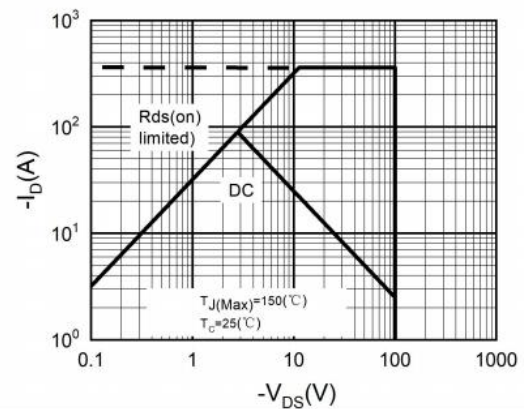

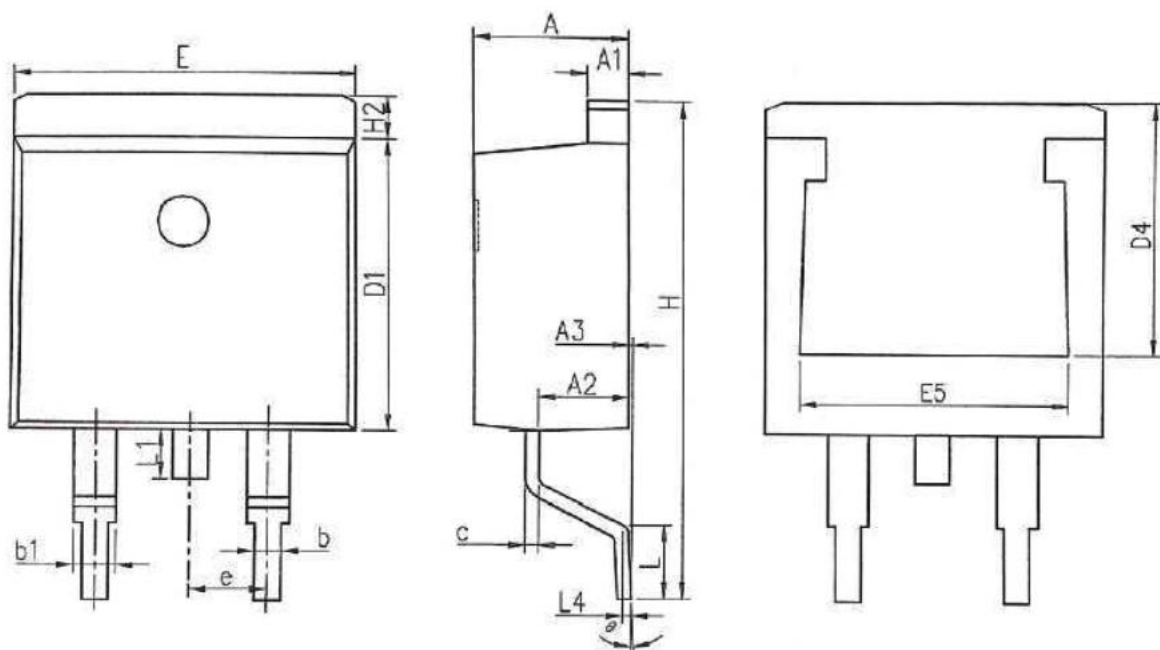

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.370	4.770	0.172	0.188
A1	1.220	1.420	0.048	0.056
A2	2.200	2.890	0.087	0.114
A3	0.000	0.250	0.000	0.010
b	0.700	0.960	0.028	0.038
b1	1.170	1.470	0.046	0.058
c	0.300	0.530	0.012	0.021
D1	8.500	9.300	0.335	0.366
D4	6.600	-	0.260	-
E	9.860	10.36	0.388	0.408
E5	7.060	-	0.278	-
e	2.540 BSC		0.100 BSC	
H	14.70	15.70	0.579	0.618
H2	1.070	1.470	0.042	0.058
L	2.000	2.600	0.079	0.102
L1	1.400	1.750	0.055	0.069
L4	0.250 BSC		0.010 BSC	
θ	0°	9°	0°	9°