



Description

The HSS2N10A is the high cell density trench N-ch MOSFETs, which provide excellent RDSON and gate charge for most of the synchronous buck converter applications.


The HSS2N10A meet the RoHS and Green Product requirement with full function reliability approved.

- Green Device Available
- Super Low Gate Charge
- Excellent Cdv/dt effect decline
- Advanced high cell density Trench technology

Product Summary

V_{DS}	100	V
$R_{DS(ON),typ}$	220	mΩ
I_D	2	A

SOT23 Pin Configuration

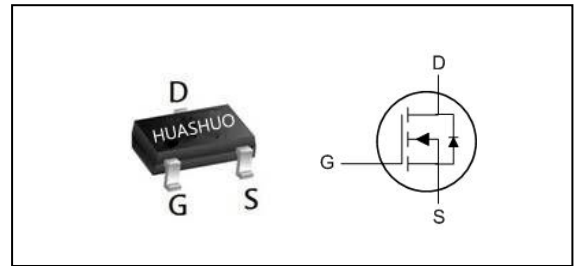

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	100	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D@T_A=25^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10V^1$	2	A
$I_D@T_A=70^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10V^1$	1.6	A
I_{DM}	Pulsed Drain Current ²	8	A
$P_D@T_A=25^\circ\text{C}$	Total Power Dissipation ³	0.72	W
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-ambient(steady state) ¹	---	174	$^\circ\text{C/W}$
	Thermal Resistance Junction-ambient($t < 10s$) ¹	---	146	$^\circ\text{C/W}$



Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=250\mu A$	100	---	---	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance ²	$V_{GS}=10V$, $I_D=3A$	---	220	260	$m\Omega$
		$V_{GS}=4.5V$, $I_D=2A$	---	240	280	$m\Omega$
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=250\mu A$	1.0	1.4	2.0	V
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=100V$, $V_{GS}=0V$, $T_J=25^\circ\text{C}$	---	---	1	μA
		$V_{DS}=100V$, $V_{GS}=0V$, $T_J=55^\circ\text{C}$	---	---	10	
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V$, $V_{DS}=0V$	---	---	± 100	nA
R_g	Gate Resistance	$V_{DS}=0V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	2	---	Ω
Q_g	Total Gate Charge (10V)	$V_{DS}=50V$, $V_{GS}=10V$, $I_D=2A$	---	7.3	---	nC
Q_{gs}	Gate-Source Charge		---	1.2	---	
Q_{gd}	Gate-Drain Charge		---	1.7	---	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=50V$, $V_{GS}=10V$, $R_G=2\Omega$ $I_D=2A$	---	6	---	ns
T_r	Rise Time		---	11	---	
$T_{d(off)}$	Turn-Off Delay Time		---	10	---	
T_f	Fall Time		---	6	---	
C_{iss}	Input Capacitance	$V_{DS}=50V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	288	---	pF
C_{oss}	Output Capacitance		---	11	---	
C_{rss}	Reverse Transfer Capacitance		---	9	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current ^{1,4}	$V_G=V_D=0V$, Force Current	---	---	2	A
V_{SD}	Diode Forward Voltage ²	$V_{GS}=0V$, $I_S=1A$, $T_J=25^\circ\text{C}$	---	---	1.2	V

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$
- 3.The power dissipation is limited by 150 $^\circ\text{C}$ junction temperature
- 4.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.



Typical Characteristics

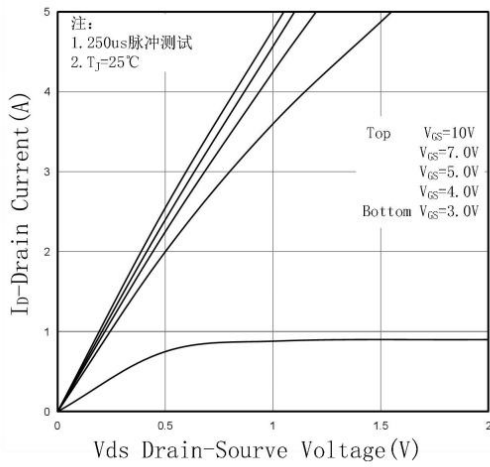


Fig.1 Output Characteristic

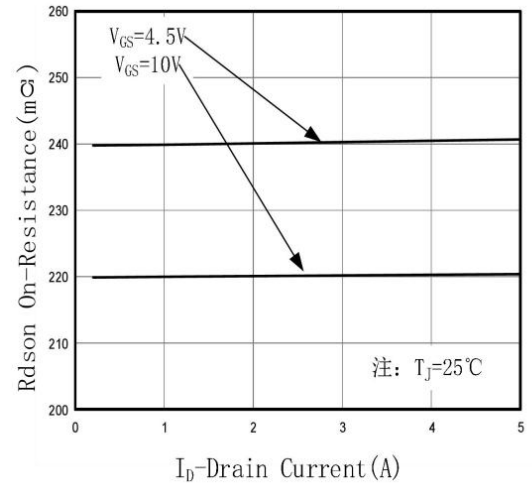


Fig.2 On-Resistance vs. Drain Current

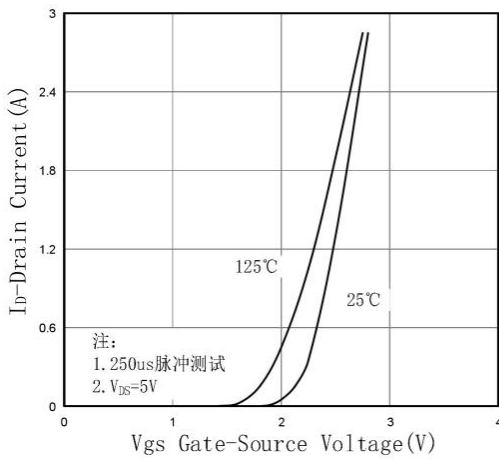


Fig.3 Transfer Characteristic

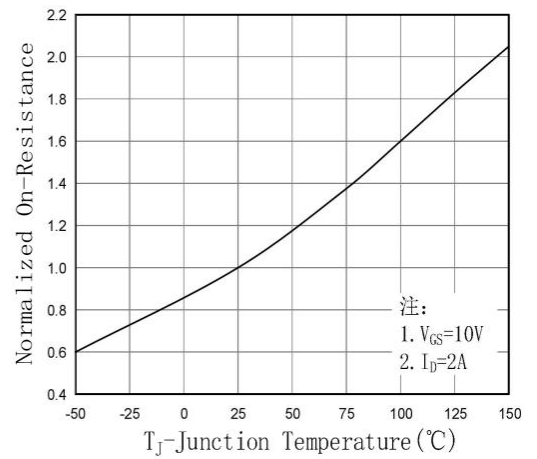


Fig.4 On-Resistance vs. Junction Temperature

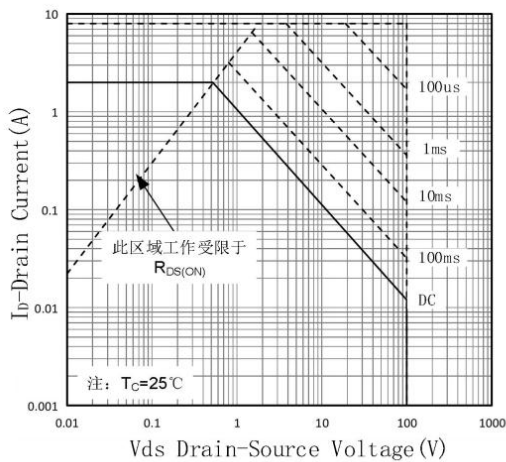


Fig.5 Safe Operation Area

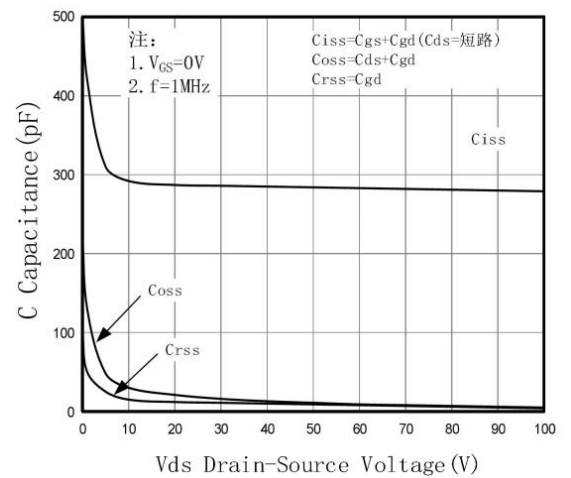


Fig.6 Capacitance Characteristic

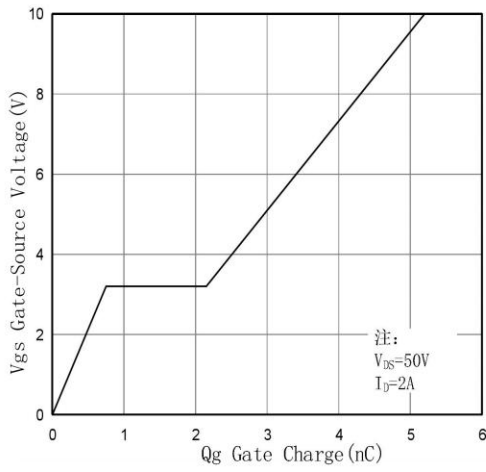


Fig.7 Gate-Charge Characteristic

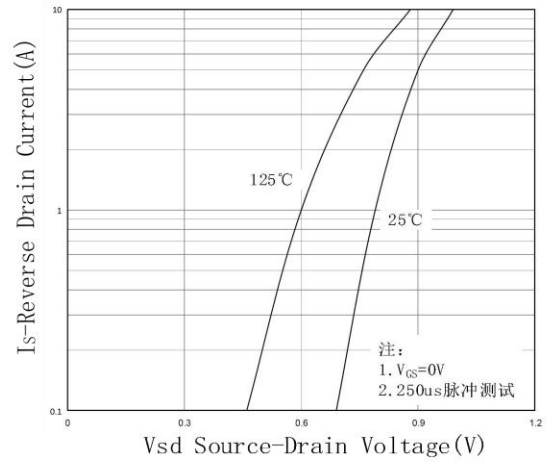


Fig.8 Body Diode Characteristic

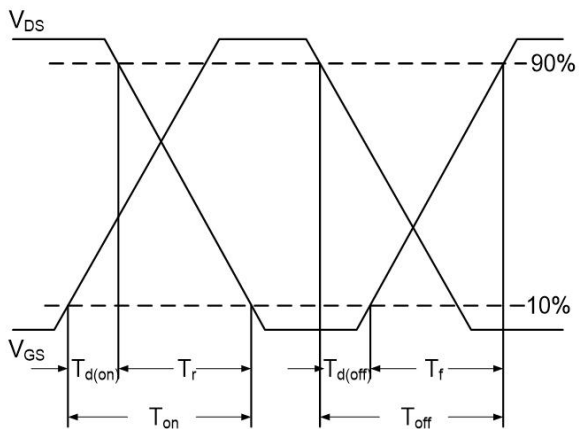


Fig.9 Switching Time Waveform


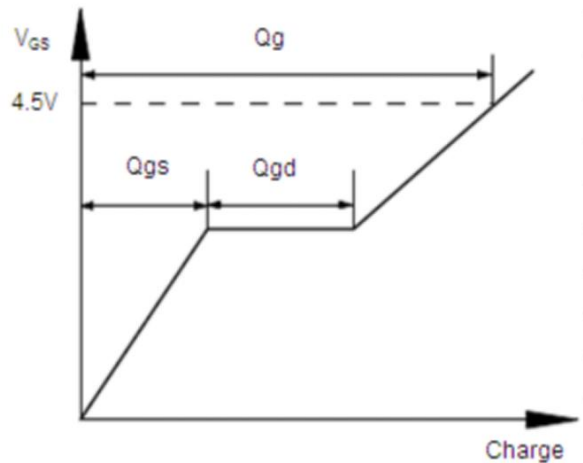


Fig.10 Gate Charge Waveform



Ordering Information

Part Number	Package code	Packaging
HSS2N10A	SOT-23	3000/Tape&Reel

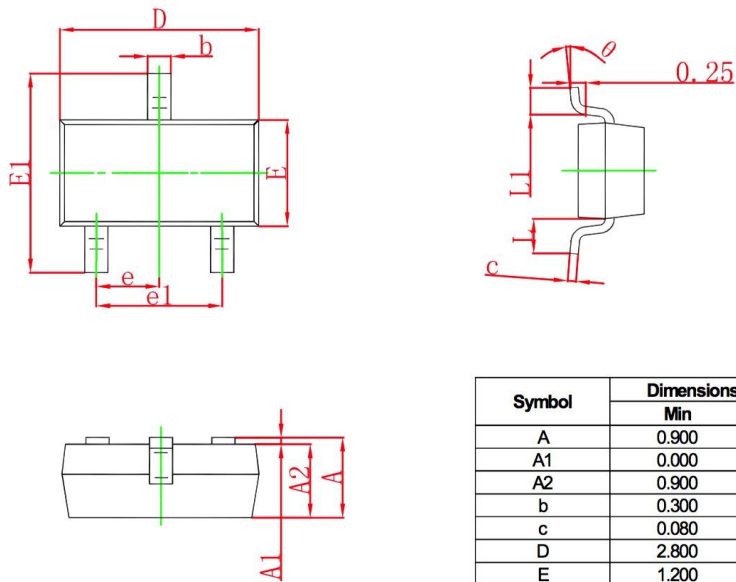

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°