

1 2 3 4 5 6 7 8

ROHS+REACH

REV.	DATE	DESCRIPTION	APPROVAL
X0	2025.07.17	NEW PRODUCT	

A

B

C

D

E

F

G

H

1

2

3

4

5

6

7

8

P1

P2

200±5

Tin 3.0±0.5

红 1 —

黑 2 —

②③


①

NOTES:

1.100% CONTINUNY TEST ANY OPEN OR MIS WIRE,
SHORT OR INTERMITENCE ARE NOT PERMITTED

2.INSULATION RESISTANCE:20M OHMS MIN

3.CONDUCTOR RESISTANCE:1Ω MAX

③	HOUSING	SINGLE ROW SOCKET PITCH:2.0mm*2PIN MATERIALS:PA66 WHITE	1PCS		DRAWING:	TOLERANCE .X:=±0.50 .XX:=±0.30 .XXX:=±0.10 .X':=±2'	 CHIN-BAN electronics (H.K) co., ltd		
②	TERMINAL	PITCH2.0MM CRIMP TERMINAL MATERIALS:PHOSPHOROUS BRONZE TIN-PLATED 24~28AWG	2PCS		CHECKED: yangjie			DESCRIPTION: Pitch2.00mm-2P to TIN L=200mm	
①	WIRE	UL1007 26AWG(7/0.16TS) 80°C 300V 绝缘:PVC OD:1.3mm	2PCS		APPROVAL:	UNIT: mm		CUSTOMER:	REV: X0
ITEM	TITLE	SPECIFICATION	Q'TY	CHIN-BAN P/N		SCALE:N/A		CUSTOMER P/N:	DEF. UK
						SHEET:1/1	DRAWING NO:	P2.00-2P-01	SIZE:A4

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

ROHS+REACH

REV.	DATE	DESCRIPTION	APPROVAL
X0	2025.07.17	NEW PRODUCT	

A

B

C

D

E

F

G

H

1

2

3

4

5

6

7

8

P1

P2

200±5

Tin 3.0±0.5

红 1 —

黑 2 —

②③

①

NOTES:

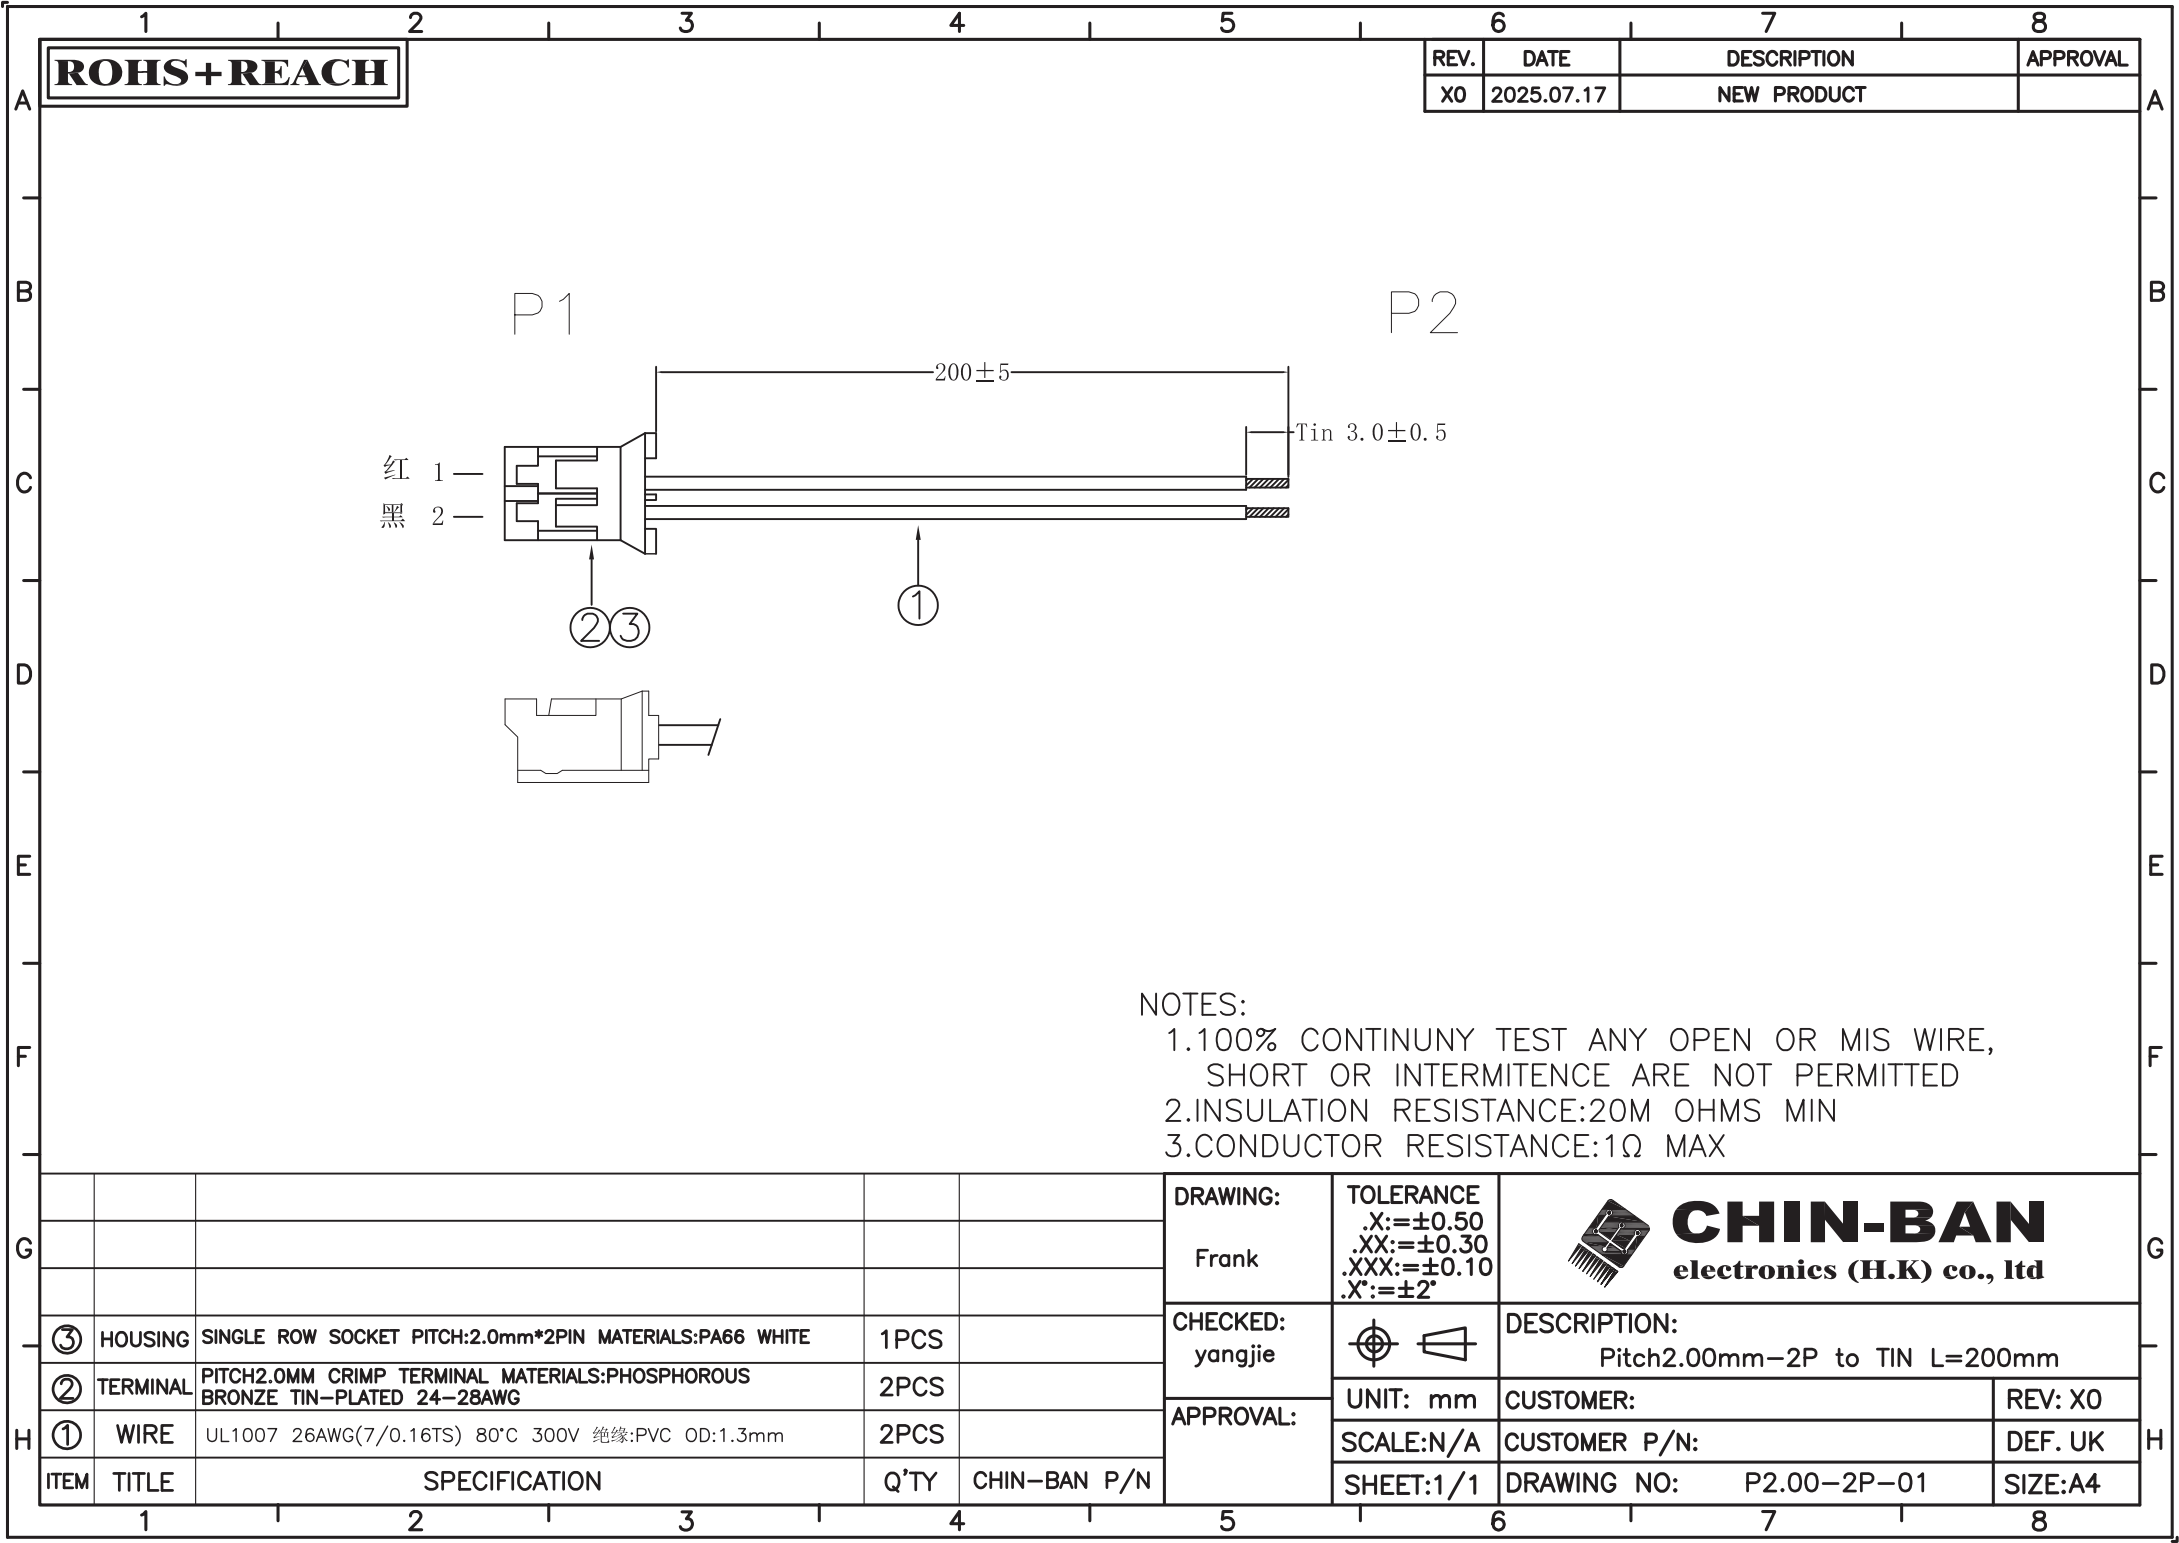
1.100% CONTINUNY TEST ANY OPEN OR MIS WIRE,
SHORT OR INTERMITENCE ARE NOT PERMITTED

2.INSULATION RESISTANCE:20M OHMS MIN

3.CONDUCTOR RESISTANCE:1Ω MAX

ITEM	TITLE	SPECIFICATION	Q'TY	CHIN-BAN P/N
③	HOUSING	SINGLE ROW SOCKET PITCH:2.0mm*2PIN MATERIALS:PA66 WHITE	1PCS	
②	TERMINAL	PITCH2.0MM CRIMP TERMINAL MATERIALS:PHOSPHOROUS BRONZE TIN-PLATED 24-28AWG	2PCS	
①	WIRE	UL1007 26AWG(7/0.16TS) 80°C 300V 绝缘:PVC OD:1.3mm	2PCS	

DRAWING:	TOLERANCE	DESCRIPTION:	
Frank	.X:=±0.50 .XX:=±0.30 .XXX:=±0.10 .X':=±2'	Pitch2.00mm-2P to TIN L=200mm	
CHECKED: yangjie	UNIT: mm	CUSTOMER:	REV: X0
APPROVAL:	SCALE:N/A	CUSTOMER P/N:	DEF. UK
	SHEET:1/1	DRAWING NO: P2.00-2P-01	SIZE:A4



1 2 3 4 5 6 7 8

ROHS+REACH

REV.	DATE	DESCRIPTION	APPROVAL
X0	2025.07.17	NEW PRODUCT	

A

B

C

D

E

F

G

H

1

2

3

4

5

6

7

8

P1

P2

200±5

Tin 3.0±0.5

红 1 —

黑 2 —

②③

①

NOTES:

1.100% CONTINUNY TEST ANY OPEN OR MIS WIRE,
SHORT OR INTERMITENCE ARE NOT PERMITTED

2.INSULATION RESISTANCE:20M OHMS MIN

3.CONDUCTOR RESISTANCE:1Ω MAX

ITEM	TITLE	SPECIFICATION	Q'TY	CHIN-BAN P/N
③	HOUSING	SINGLE ROW SOCKET PITCH:2.0mm*2PIN MATERIALS:PA66 WHITE	1PCS	
②	TERMINAL	PITCH2.0MM CRIMP TERMINAL MATERIALS:PHOSPHOROUS BRONZE TIN-PLATED 24-28AWG	2PCS	
①	WIRE	UL1007 26AWG(7/0.16TS) 80°C 300V 绝缘:PVC OD:1.3mm	2PCS	

DRAWING:	TOLERANCE	DESCRIPTION:	
Frank	.X:=±0.50 .XX:=±0.30 .XXX:=±0.10 .X':=±2'	Pitch2.00mm-2P to TIN L=200mm	
CHECKED: yangjie	UNIT: mm	CUSTOMER:	REV: X0
APPROVAL:	SCALE:N/A	CUSTOMER P/N:	DEF. UK
	SHEET:1/1	DRAWING NO: P2.00-2P-01	SIZE:A4

1 2 3 4 5 6 7 8

ROHS+REACH

REV.	DATE	DESCRIPTION	APPROVAL
X0	2025.07.17	NEW PRODUCT	

A

B

C

D

E

F

G

H

1

2

3

4

5

6

7

8

P1

P2

200±5

Tin 3.0±0.5

红 1 —

黑 2 —

②③

①

NOTES:

1.100% CONTINUNY TEST ANY OPEN OR MIS WIRE,
SHORT OR INTERMITENCE ARE NOT PERMITTED

2.INSULATION RESISTANCE:20M OHMS MIN

3.CONDUCTOR RESISTANCE:1Ω MAX

ITEM	TITLE	SPECIFICATION	Q'TY	CHIN-BAN P/N
③	HOUSING	SINGLE ROW SOCKET PITCH:2.0mm*2PIN MATERIALS:PA66 WHITE	1PCS	
②	TERMINAL	PITCH2.0MM CRIMP TERMINAL MATERIALS:PHOSPHOROUS BRONZE TIN-PLATED 24-28AWG	2PCS	
①	WIRE	UL1007 26AWG(7/0.16TS) 80°C 300V 绝缘:PVC OD:1.3mm	2PCS	

DRAWING:	TOLERANCE	DESCRIPTION:	
Frank	.X:=±0.50 .XX:=±0.30 .XXX:=±0.10 .X':=±2'	Pitch2.00mm-2P to TIN L=200mm	
CHECKED: yangjie	UNIT: mm	CUSTOMER:	REV: X0
APPROVAL:	SCALE:N/A	CUSTOMER P/N:	DEF. UK
	SHEET:1/1	DRAWING NO: P2.00-2P-01	SIZE:A4

ROHS+REACH

REV.	DATE	DESCRIPTION	APPROVAL
X0	2025.07.17	NEW PRODUCT	

A

B

C

D

E

F

G

H

1

2

3

4

5

6

7

8

P1

P2

200±5

Tin 3.0±0.5

红 1 —

黑 2 —

②③


①

NOTES:

1.100% CONTINUNY TEST ANY OPEN OR MIS WIRE,
SHORT OR INTERMITENCE ARE NOT PERMITTED

2.INSULATION RESISTANCE:20M OHMS MIN

3.CONDUCTOR RESISTANCE:1Ω MAX

					DRAWING:	TOLERANCE .X:=±0.50 .XX:=±0.30 .XXX:=±0.10 .X':=±2'	 CHIN-BAN electronics (H.K) co., ltd	
					Frank			
③	HOUSING	SINGLE ROW SOCKET PITCH:2.0mm*2PIN MATERIALS:PA66 WHITE	1PCS		CHECKED:		DESCRIPTION: Pitch2.00mm-2P to TIN L=200mm	
②	TERMINAL	PITCH2.0MM CRIMP TERMINAL MATERIALS:PHOSPHOROUS BRONZE TIN-PLATED 24-28AWG	2PCS		yangjie		UNIT: mm	CUSTOMER:
①	WIRE	UL1007 26AWG(7/0.16TS) 80°C 300V 绝缘:PVC OD:1.3mm	2PCS		APPROVAL:	SCALE:N/A	CUSTOMER P/N:	DEF. UK
ITEM	TITLE	SPECIFICATION	Q'TY	CHIN-BAN P/N		SHEET:1/1	DRAWING NO: P2.00-2P-01	SIZE:A4

1 2 3 4 5 6 7 8