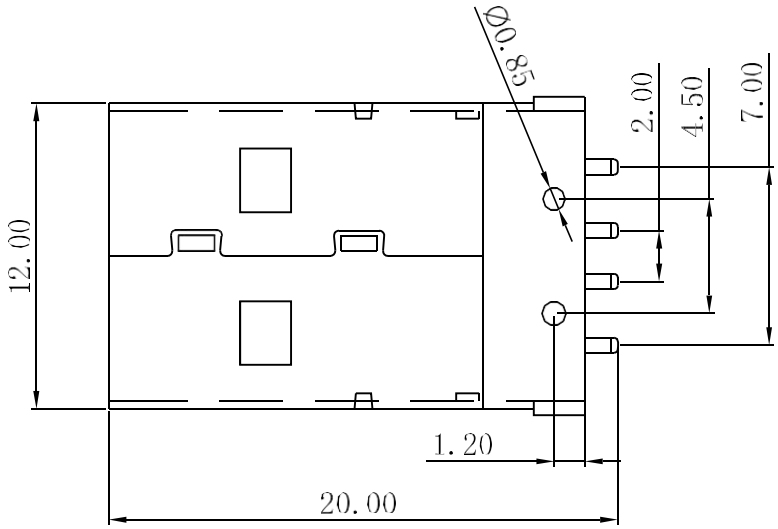

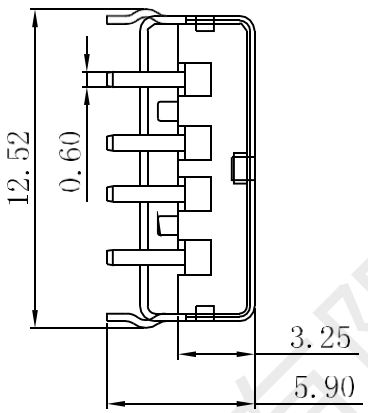

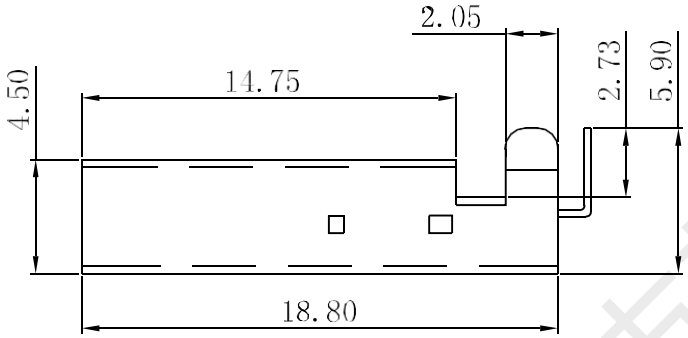

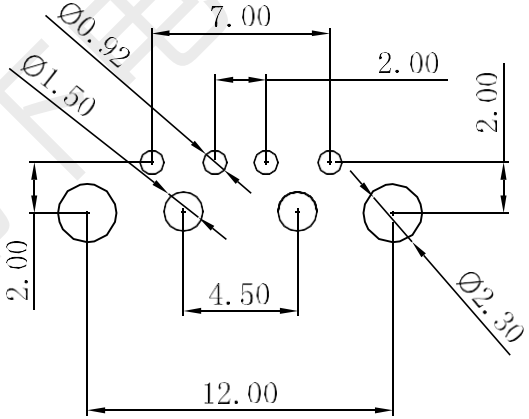

规格说明：Specifications:
电气特性：Electrical:
1.额定电流：Current Ratin
1A/contact terminalg
2.额定电压：Voltage Rating
30V DC
3.接触阻抗：Contact Resistance
30 milliohms MAX
4.耐电压：Dielectnic Withstanding
Voitage
500 V AC AT Sea Levol
5.绝缘阻抗：Lnsulation Resistance
1000MEGA ohms MIN
物理性能：Mechanical:
1.插拔力：Cnnector Mate and Unmate Force
Mate force: 35N (MAX)
Unmate force: 7N (MIN)
材料：Matorial:
1.塑胶：Housing:
PBT
2.端子：Contact:
Copper Alloy C2680
3.外壳：Shell:
SPCC
电镀：Finish:
1.端子：Contact:
Piated Gold in Mating Area,
Tin On Solder Talls
2.外壳：Shell
Nickel Plating
温度范围：Temperature Range:
-30℃ to +80℃

PCB LAYOUT

TOLERANCE UNLESS OTHERWISE SPECIFIED
.XXX ±0.10
.XX ±0.20
.X ±0.30
.X° ±3°

REV:	DESCRIPTION	REV BY	APPROVED	DATE	MATL:	SEE SPECFICATION			APPROVED	罗小春	
					PROJECTION	THIRD ANGLE PROJECTION			CHECKED	张伟	
					UNIT:	SCALE	REV (NO)	SHEET	DRAWED	黄彬	
					mm	1:1	A	1 OF 1	DATE	2011.10.13	

产品名称 PART NAME:	HX AM 90°	
料号 PART NO:	SEE Table	C

韩下 HANXIA 深圳市韩下电子有限公司

深圳市韩下电子有限公司