


VER	MARK	PR. BY	ECR/ECN DESCRIPTION	DATE
A			NEW RELEASE	07/12' 17
B	△		新增料号	05/04' 19
C	△		扣合结构调整	07/20' 19

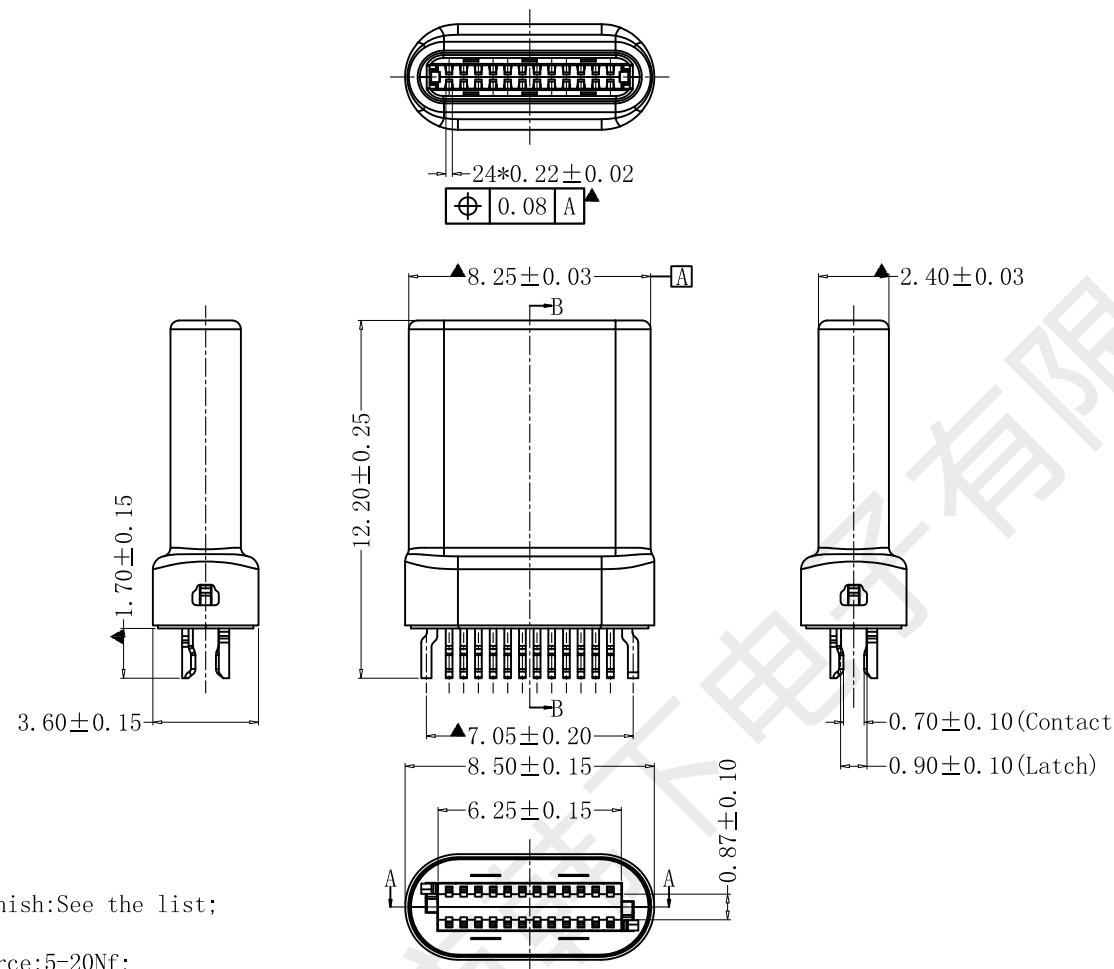

SPECIFICATION:

1. Material & Finish: See the list;
 2. Mechanical:
 2. 1. Mating force: 5-20Nf;
 2. 2. Ummating force: Initial: 8-20Nf; Final: 6-20Nf;
 2. 3. Durability: 10000 Cycles;
 2. 4. Shell withdrawal force: 50Nf Min.;
 3. Electrical:
 3. 1. Current Rating: 5A Max. for VBus contact;
 3. 2. Voltage Rating: 20V Max.;
 3. 3. Dielectric Withstanding voltage: 100VAc;
 3. 4. Contact resistance: 40m Ohms Max.;
 3. 5. Insulation Resistance: 100M Ohms Min.;
 4. Environmental:
 4. 1. Operating temperature: -30° C ~ +80° C;
 4. 2. Salt Spray Test: 24H (No oxidation or rust);
 4. 3. Wetting Temperature: 265 ± 5° C, 5 ± 0.5s

CUSTOMER		GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: 罗小春	® 韩下 HANXIA 深圳市韩下电子有限公司		
SIZE A4	UNITS MM[INCH]	X±0.50	X*±5.0°	CHECKED BY: 张伟	PART NO.: HX TYPE C-M 24P-RST	TITLE: TYPE-C 公头	
		X±0.35	X*±3.0°				
SCALE 1:1	REV. 1	.XX±0.25	.XX*±2.5°	DESIGN BY: 黄彬	DWG NO.: 	SHEET 1/3	
		.XXX±0.15	.XXX*±2.0°				

