

General Description:

The LWS1H90A4 uses advanced SGT technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. It can be used in a wide variety of applications. The package form is TO-252, which accords with the ROHS standard and Halogen Free standard.

Features:

- Fast Switching
- Low Gate Charge and $R_{DS(ON)}$
- Low Reverse transfer capacitances

Applications:

- DC-DC Converter
- Portable Equipment
- Power Management

100% DVDS Tested

100% Avalanche Tested



Package Marking and Ordering Information:

Marking	Part Number	Package	Packing	Qty.
S1H90/LW A4/D.C.	LWS1H90A4	TO-252	Reel	2500 Pcs

Absolute Maximum Ratings:


Symbol	Parameter		Value	Units
V_{DSS}	Drain-to-Source Voltage		-100	V
I_D	Continuous Drain Current	$T_C=25^{\circ}C$	-25	A
	Continuous Drain Current	$T_C=100^{\circ}C$	-15.9	A
I_{DM}^{a1}	Pulsed Drain Current		-100	A
E_{AS}^{a2}	Single pulse avalanche energy		200	mJ
V_{GS}	Gate-to-Source Voltage		± 20	V
P_D	Power Dissipation		80	W
T_J, T_{STG}	Operating Junction and Storage Temperature Range		150, -55 to 150	$^{\circ}C$
T_L	Maximum Temperature for Soldering		260	$^{\circ}C$

Thermal Characteristics:


Symbol	Parameter	Value	Units
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	1.56	$^{\circ}C/W$
$R_{\theta JA}^{a3}$	Thermal Resistance, Junction-to-Ambient	91	$^{\circ}C/W$

V_{DSS}	-100	V
I_D	-25	A
P_D	80	W
$R_{DS(ON) \text{ TYPE}}$	72	m Ω

Marking and Pin Assignment



Inner Equivalent Principium Chart



Electrical Characteristic ($T_C = 25\text{ }^{\circ}\text{C}$, unless otherwise specified):

Static Characteristics						
Symbol	Parameter	Test Conditions	Value			Units
			Min.	Typ.	Max.	
V_{DSS}	Drain to Source Breakdown Voltage	$V_{GS}=0V, I_D=-250\mu A$	-100	--	--	V
I_{DSS}	Drain to Source Leakage Current	$V_{DS}=-100V, V_{GS}=0V$	--	--	1.0	μA
$I_{GSS(F)}$	Gate to Source Forward Leakage	$V_{GS}=-20V, V_{DS}=0V$	--	--	-100	nA
$I_{GSS(R)}$	Gate to Source Reverse Leakage	$V_{GS}=+20V, V_{DS}=0V$	--	--	100	nA
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu A$	-1.5	-2.0	-2.5	V
$R_{DS(ON)1}$	Drain-to-Source On-Resistance	$V_{GS}=-10V, I_D=-10A$	--	72	90	m Ω
$R_{DS(ON)2}$	Drain-to-Source On-Resistance	$V_{GS}=-4.5V, I_D=-5.0A$	--	87	105	m Ω

Dynamic Characteristics						
Symbol	Parameter	Test Conditions	Value			Units
			Min.	Typ.	Max.	
C_{iss}	Input Capacitance	$V_{GS} = 0V$	--	1216	--	pF
C_{oss}	Output Capacitance	$V_{DS} = -50V$	--	102	--	
C_{rss}	Reverse Transfer Capacitance	$f = 1.0MHz$	--	13	--	
R_g	Gate resistance	$V_{GS} = 0V, V_{DS}=0V, f=1MHz$	--	59	--	Ω



Resistive Switching Characteristics						
Symbol	Parameter	Test Conditions	Value			Units
			Min.	Typ.	Max.	
$t_{d(ON)}$	Turn-on Delay Time	$I_D = -10A$	--	8.8	--	ns
t_r	Rise Time	$V_{DS} = -50V$	--	16	--	
$t_{d(OFF)}$	Turn-Off Delay Time	$V_{GS} = -10V$	--	60	--	
t_f	Fall Time	$R_G = 5.0\Omega$	--	41	--	
Q_g	Total Gate Charge	$V_{GS} = -10V$	--	23	--	nC
Q_{gs}	Gate Source Charge	$V_{DS} = -50V$	--	4.6	--	
Q_{gd}	Gate Drain Charge	$I_D = -10A$	--	4.5	--	



Source-Drain Diode Characteristics						
Symbol	Parameter	Test Conditions	Value			Units
			Min.	Typ.	Max.	
I_S	Diode Forward Current	$T_C = 25\text{ }^{\circ}\text{C}$	--	--	-25	A
V_{SD}	Diode Forward Voltage	$I_S = -10A, V_{GS} = 0V$	--	--	-1.2	V
t_{rr}	Reverse Recovery time	$I_S = -10A, V_{DD} = -50V$	--	52	--	ns
Q_{rr}	Reverse Recovery Charge	$dI/dt = 100A/\mu s$	--	111	--	nC

a1: Repetitive rating; pulse width limited by maximum junction temperature

a2: $V_{DD} = -50V, L = 5.0mH, R_g = 25\Omega$, Starting $T_J = 25\text{ }^{\circ}\text{C}$

a3: Surface Mounted on FR4 Board, $t \leq 10\text{ sec.}$

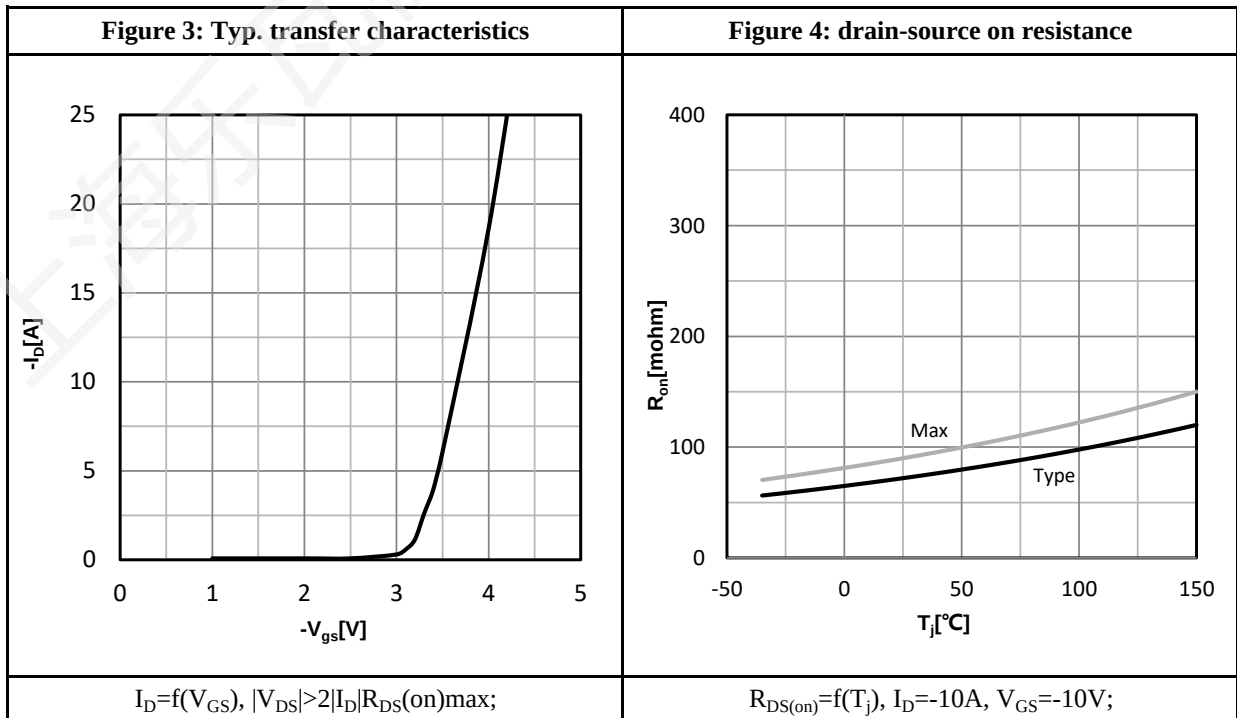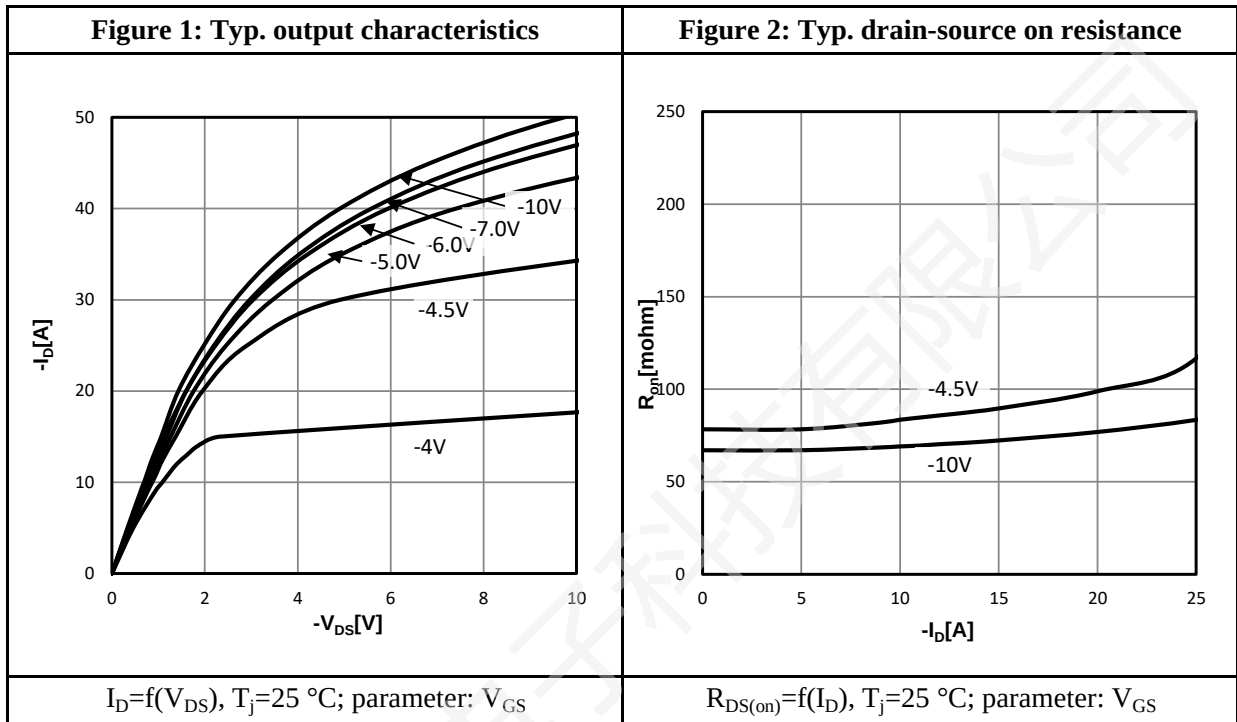Characteristics Curve:

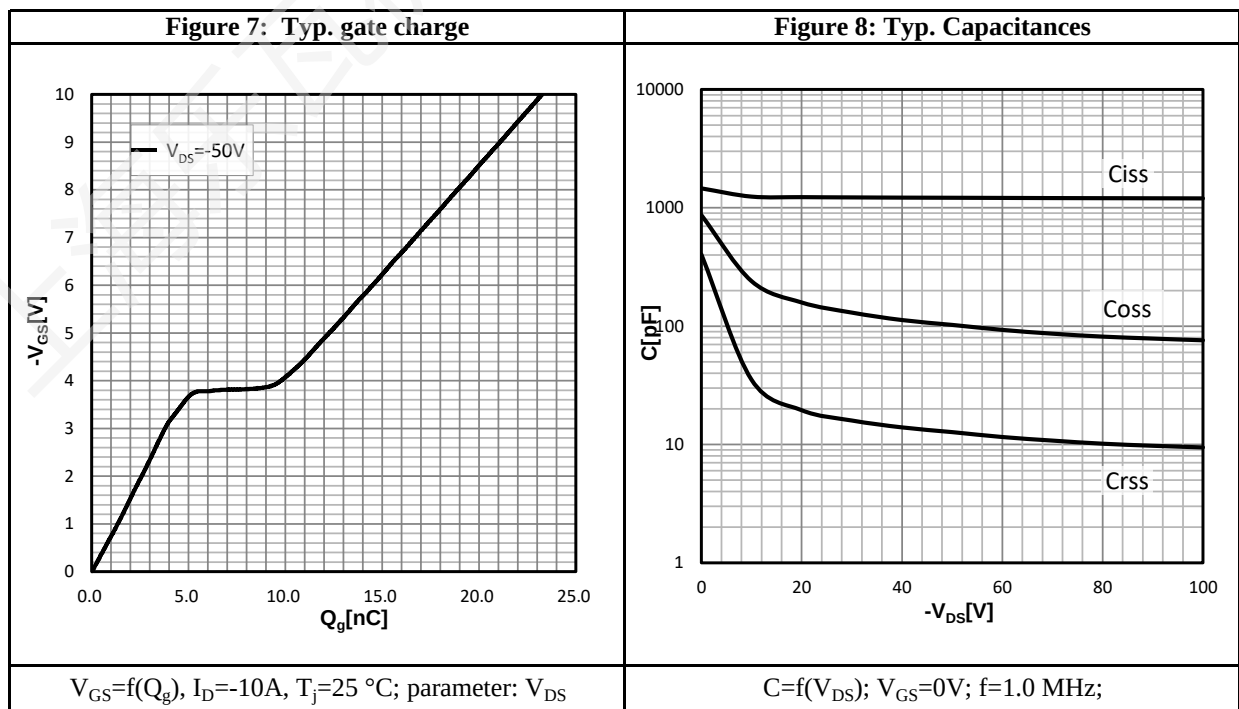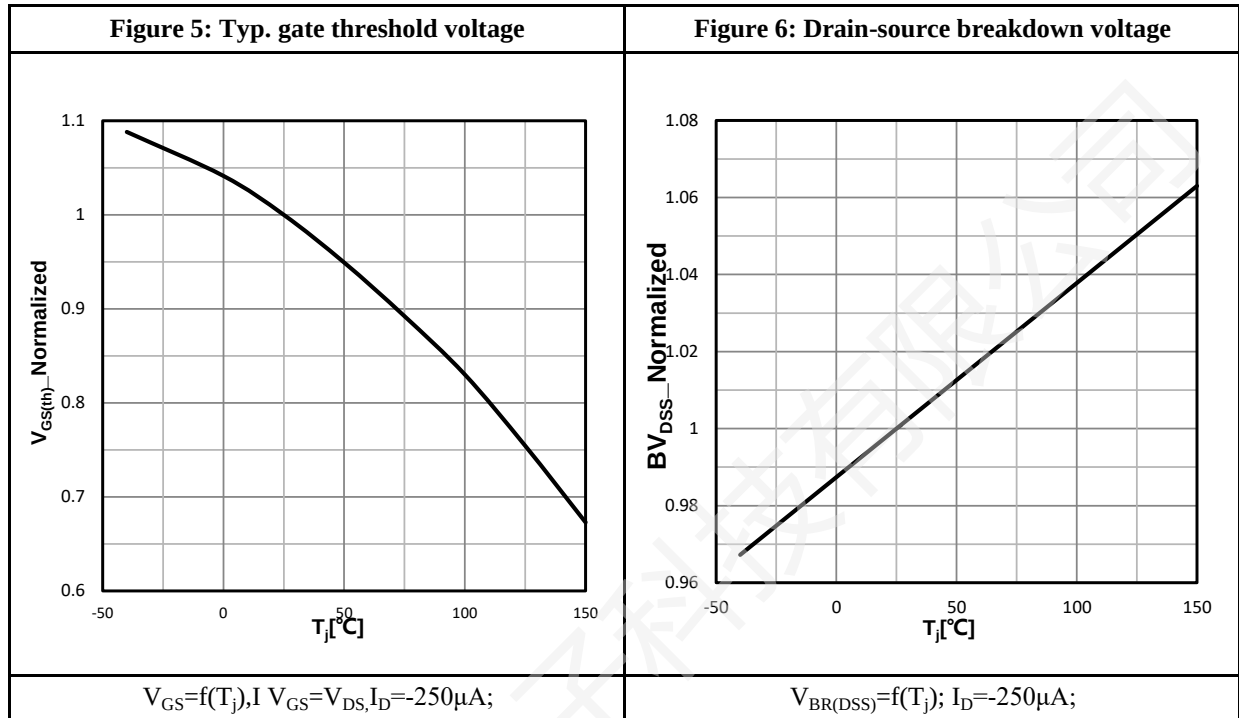


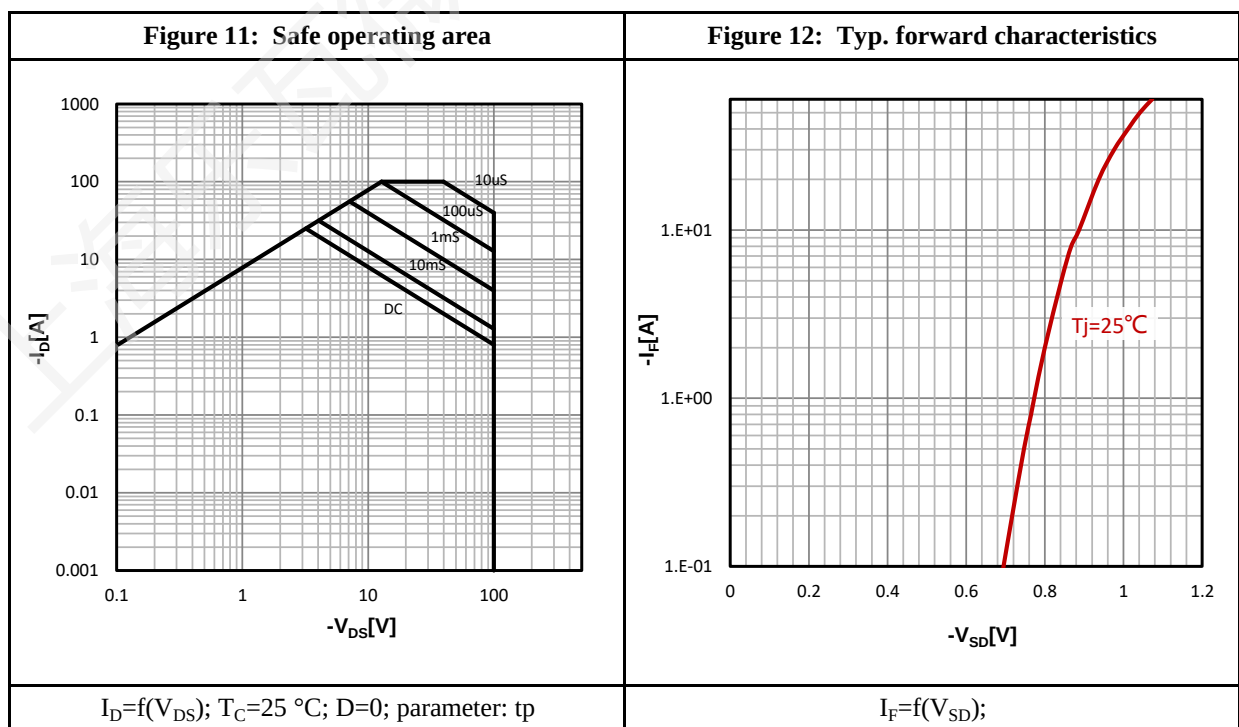
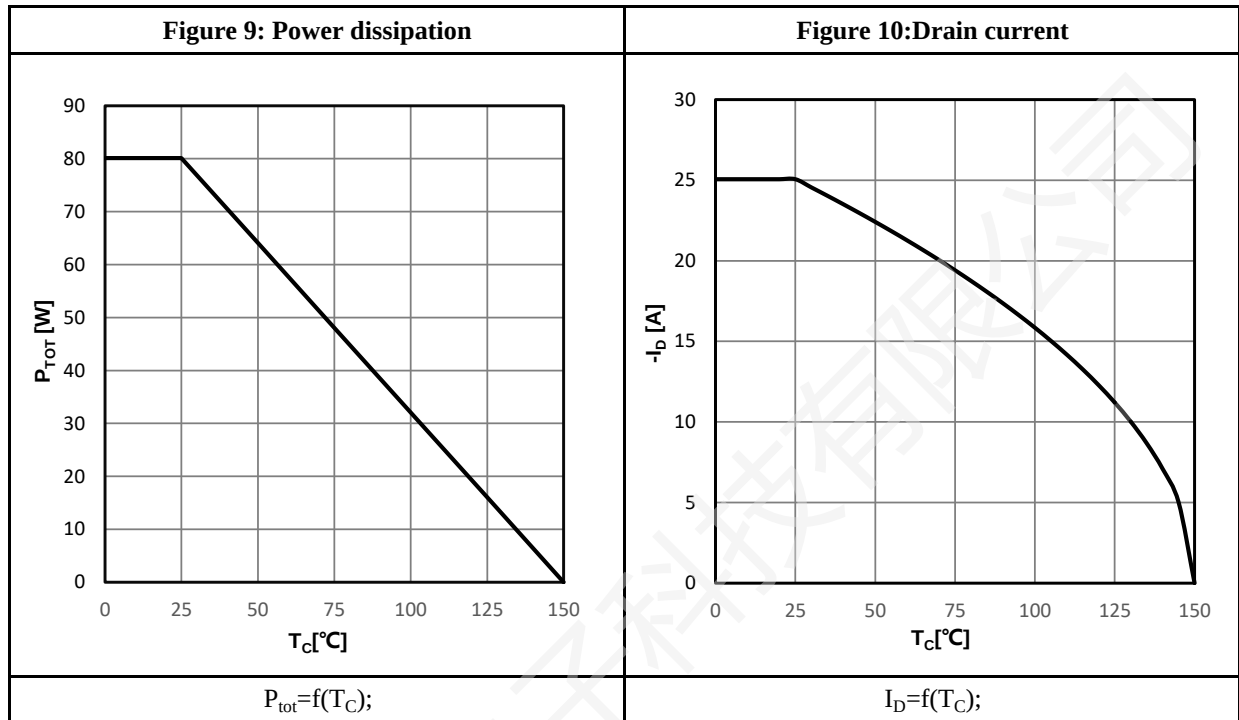
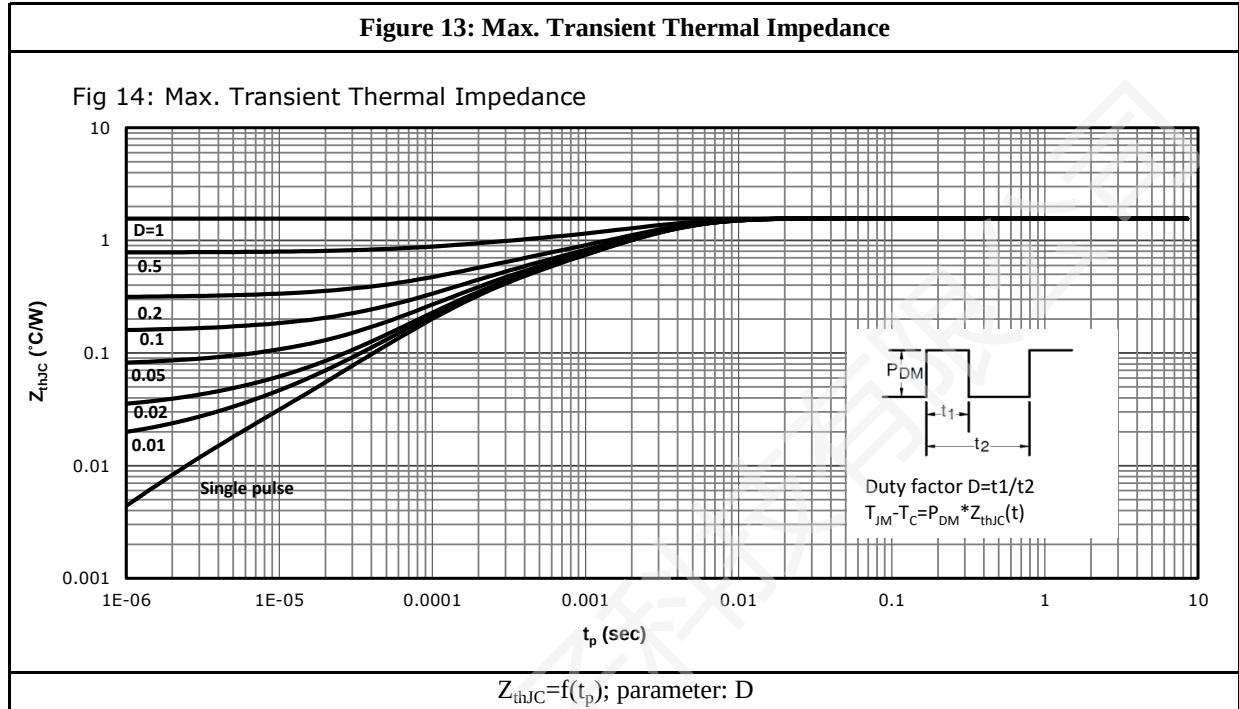
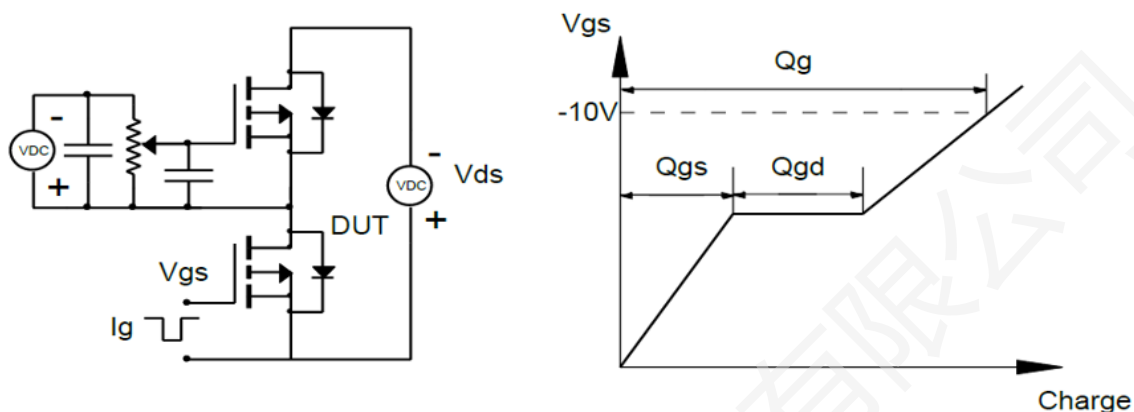
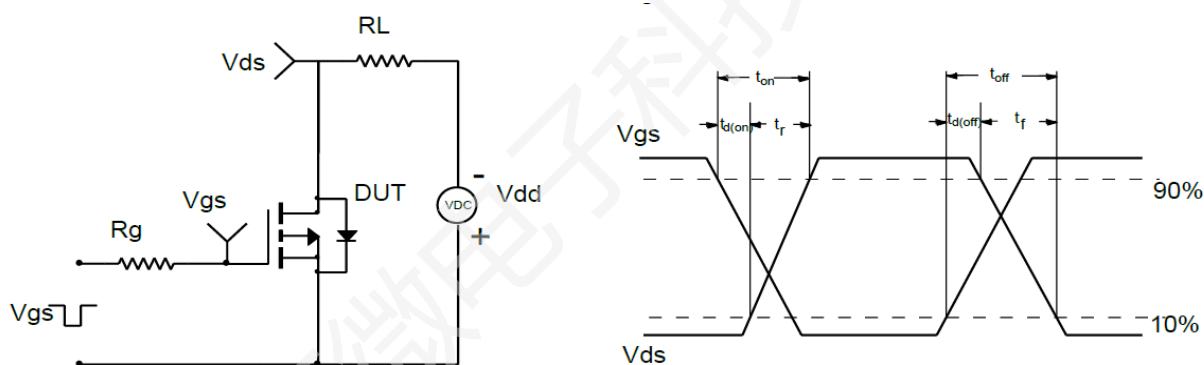
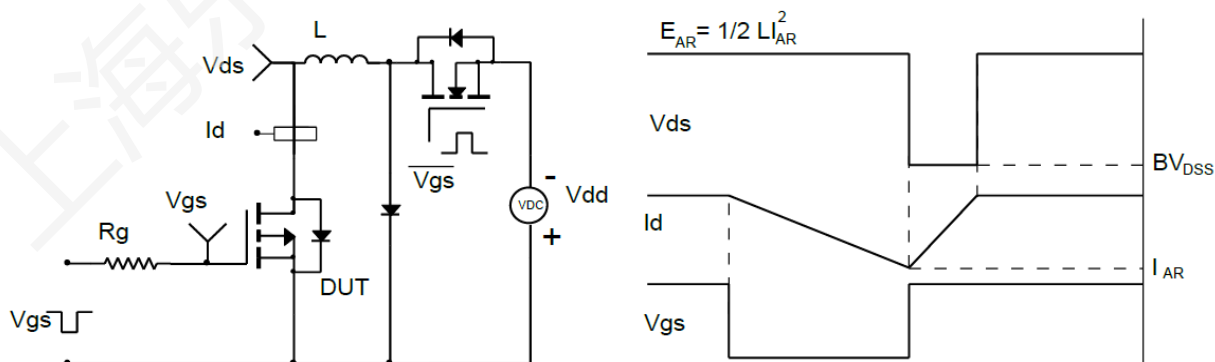
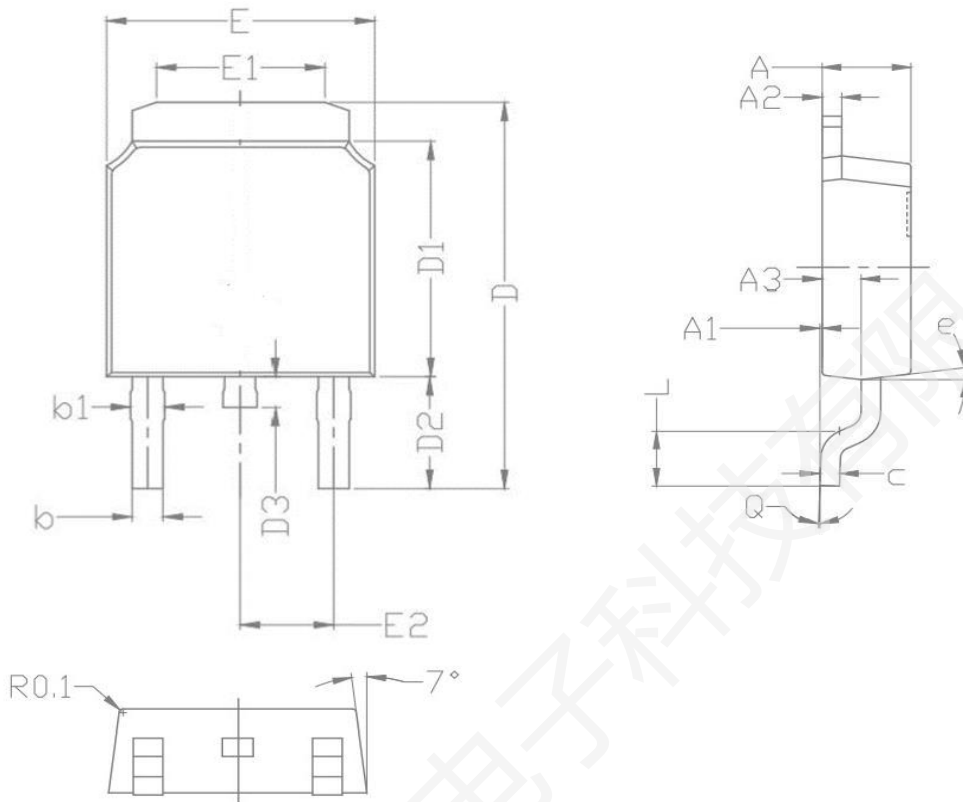


Figure 13: Max. Transient Thermal Impedance


Test Circuit & Waveform:

Figure 14: Gate Charge Test Circuit & Waveform

Figure 15: Resistive Switching Test Circuit & Waveforms

Figure 16: Unclamped Inductive Switching Test Circuit & Waveforms

Package Outline:


COMMON			
PKG	TO-252-2L		
Symbol	MIN	NOM	MAX
A	2.200	2.300	2.400
A1	0.000	0.075	0.150
A2	0.500	0.508	0.550
A3	0.960	1.010	1.060
b	0.740	0.760	0.800
b1	0.880	0.900	0.950
C	0.500	0.508	0.550
D	9.800	10.025	10.350
D1	6.050	6.100	6.180
D2	2.850	2.900	2.950
D3	0.600	0.800	1.000
E	6.550	6.600	6.700
E1	4.050	4.130	4.200
E2	2.250	2.286	2.300
L	1.400	1.500	1.600
e	7°		
Q	0°	2°	5°

Revision History:

Revison	Date	Descriptions
Rev 1.1	June.2025	“Electrical Characteristic ” Update
Rev 1.0	Feb.2023	Initial Version

Disclaimer:

The information in this document is believed to be accurate and reliable. However, no responsibility is assumed by LW-Micro for its use. All operating parameters must be designed, validated and tested to ensure they meet the requirements of your application. LW-Micro reserves the right to make any specification and/or circuitry changes without prior notification. Before starting a brand-new project, please contact LW-Micro Sales to get the most recent relevant information.

Mailing Address: Unit 02&04&05, 10th Floor, Building 5, No.666 Shengxia Road, No.122 Yindong Road,
China (Shanghai) Pilot Free Trade Zone
Shanghai Lewa Micro-electronics Technology Co., Ltd