




Wire Wound Type Common Mode Filter


- 1.High common mode impedance at high frequency cause excellent noise suppression performance.
- 2.WCM2012F2SF series realizes small size and low profile. 2.0x1.2x1.2 mm.
- 3.100% Lead(Pb) & Halogen-Free and RoHS compliant.

Part Number	Common mode Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA) max.	Rated Volt. (Vdc) max.	Withstand Volt. (Vdc) max.	IR (Ω) min.
WCM2012F2SF-102SN H	750~1000	100	0.88	300	50	125	10M

MECHANICAL

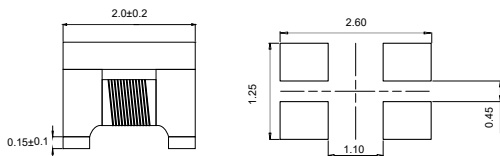


SUGGEST LAYOUT

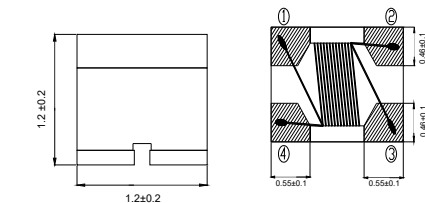


Dimension : mm


SCHEMATICS

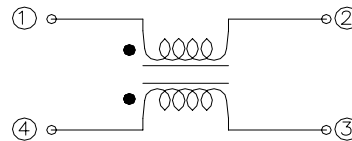

IMPEDEANCE FREQUENCY

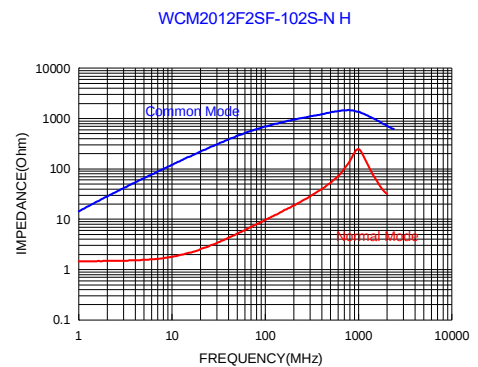


TAPING AND PACKING

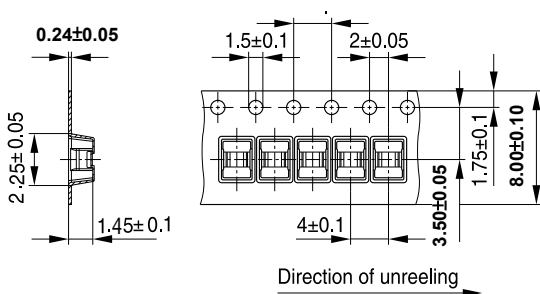

Direction of unreeling

IND1752-J-E

Reel

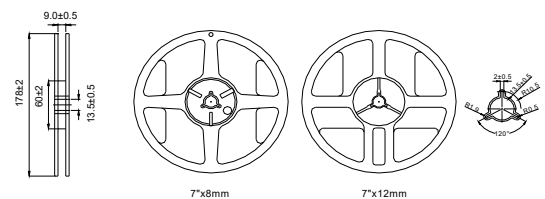

Dimensions in mm

Quantity (pcs):
2000 PCS PER REEL
5 REELS PER CARTON
10000PCS PER CARTON

Shenzhen magnetic Lianda Electronics Co., LTD

Address: 505, West Block, No. 221, Niucheng Road, Niucheng Village, Baiwang Community, Xili Street, Nanshan District, Shenzhen
Tel: 0755-27652992 29016433 E-mail: sales1@cd-tek.com Website: www.cd-tek.com