

承 认 书

Specification for approval

客户名称(Customer name): _____

经办者(Director): _____

职称(title): _____

客户料号(Customer part NO): _____

版本(Revision): _____ A3

发件日期(Issue date): _____

回文日期(Return date): _____

一、谨致执事者：兹提供敝公司产品之有关详细规格及图面数据，敬请给予办理测试认定手续，同时敬请送返一份附有贵公司签认之测试认定后之样品认定书。

(We are please in sending you herewith our specification and drawings for your approval.)

(Please return to us one copy "For Approval" with your approved signatures.)

二、附件(Accessory):

- | | | | |
|--------------------------------|----------------------------------|---------------------------------|---------------------------------|
| <input type="checkbox"/> 样品 | <input type="checkbox"/> 出货检验记录表 | <input type="checkbox"/> 封装尺寸图 | <input type="checkbox"/> 电气特性曲线 |
| <input type="checkbox"/> 内部线路图 | <input type="checkbox"/> 焊性建议 | <input type="checkbox"/> PAD 建议 | <input type="checkbox"/> 包装方式 |

三、客户意见栏(Customer's Proposal)

- ☐ 同意(Agree): (请于认可栏中签名)
- ☐ 不同意(Disagree):


原因(Reason): _____

客户认可签章(Customer Signature): _____

1. 产品描述/ Features

- 外观尺寸/ Package (L/W/H) : 4.42*2.75*3.7mm
- 该产品是采用高温稳定性良好和可见光敏感的集成处理 IC 封装, 用圆柱型环氧树脂封装保护 The product is packaged with integrated processing IC with good high-temperature stability and visible light sensitivity, and protected with cylindrical epoxy resin
- 环境光传感器响应光谱接近可见光光谱(The response spectrum of ambient light sensor is close to that of visible light
- 对红外具有高抑制特性(High IR suppression)
- 功耗低,可靠性高,寿命长,符合 RoHS 环保要求 Low power consumption, high reliability, long life, comply with RoHS environmental requirements.
- 输出电流对光通量的高线性度 High linearity of output current to luminous flux.
- 用于抗红外干扰类产品, 控制昼夜切换, 无需加套管、滤光片 It is used for anti infrared interference products to control day and night switching without adding casing and filter


2. 外形尺寸/ Package Profile

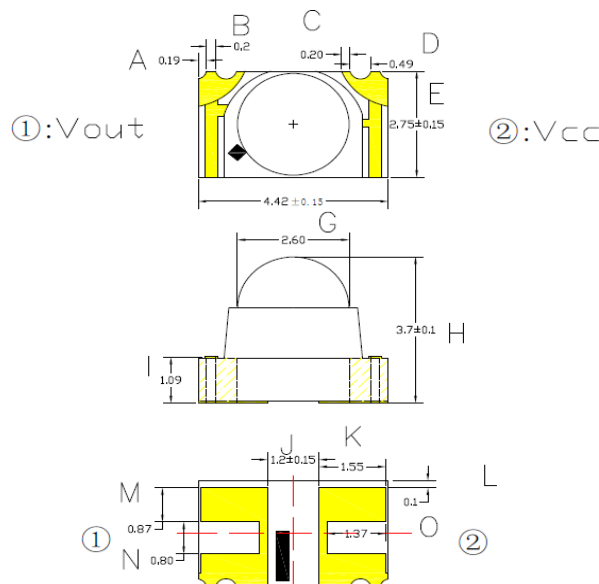

注/ Notes: 1. 单位 : 毫米 (mm) / All dimensions are in millimeters

公差 : 如无特别标注则为 ± 0.1 mm Tolerance is ± 0.10 mm unless otherwise noted

3. 建议焊接温度曲线 / Soldering Profile Suggested

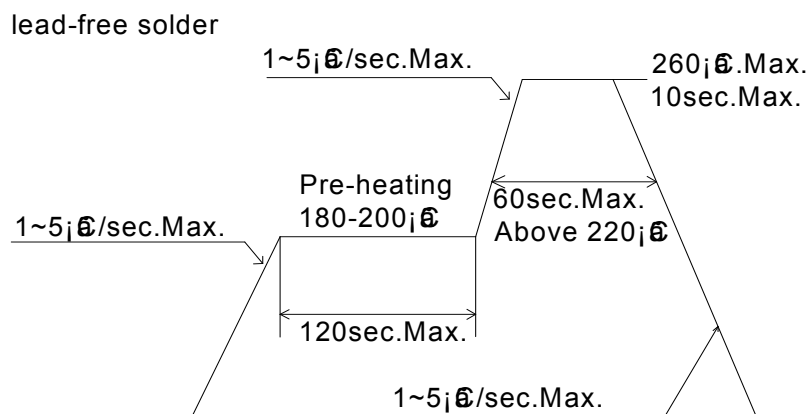



4. 最大绝对额定值/ Absolute Maximum Ratings (Ta=25°C)

参 数/ Parameter	符号Symbol	最大额定值/ Rating	单 位/ Unit
消耗功率/ Power Dissipation	Pm	75	mW
极限电压/Supply Voltage	VCC	6	V
工作温度范围 Operating Temperature Range	Tamb	-20°C ~ +85°C	
存储温度范围 Storage Temperature Range	Tstg	-30°C ~ +100°C	
焊接条件 Soldering Condition	Tsol	回流焊/ Reflow soldering : 260°C , 5s 手动焊/ Hand soldering : 300°C , 3s	
Electrostatic Discharge (HBM) (静电)	ESD	≥2000	

5. 光电参数/ Electrical Optical Characteristics (Ta=25°C)

参数 Parameter	符号 Symbol	最小值 Min.	代表值 Typ.	最大值 Max.	单位 Unit	测试条件 Test Condition
工作电压 Supply Voltage	V _{CEO}	0.7	--	7	V	DC
上升时间 Rise time	Tr	--	4.5	-	μS	V _{CE} =5V 0 Lux
下降时间 Fall time	T _f	-	4.5	--	μS	RL=1000Ω
集电极暗电流 Collector Dark Current	I _{CEO}	-	--	0.2	uA	E _v =0Lux V _{CE} =5V
集电极光电流 Collector Photocurrent	I _{C(ON)}	800	900	1300	uA	E _v =100Lux V _{CE} =5 V




峰值敏感波长 Peak Sensitivity Wavelength	λ_p	-	550	-	nm	-
光谱带宽范围 Rang of Spectral Bandwidth	λ_p	400	-	750	nm	-
抗红外接收电流 Infra red response	IC(on)2	1000		2000	uA	VCC=5v IR led: 850nm Ee=1mW/cm2


Note 备注: VR=5V For test conditions , VR=5V 为测试分选条件

6. 测试方法/ test method

6.1 测试电路 test circuit

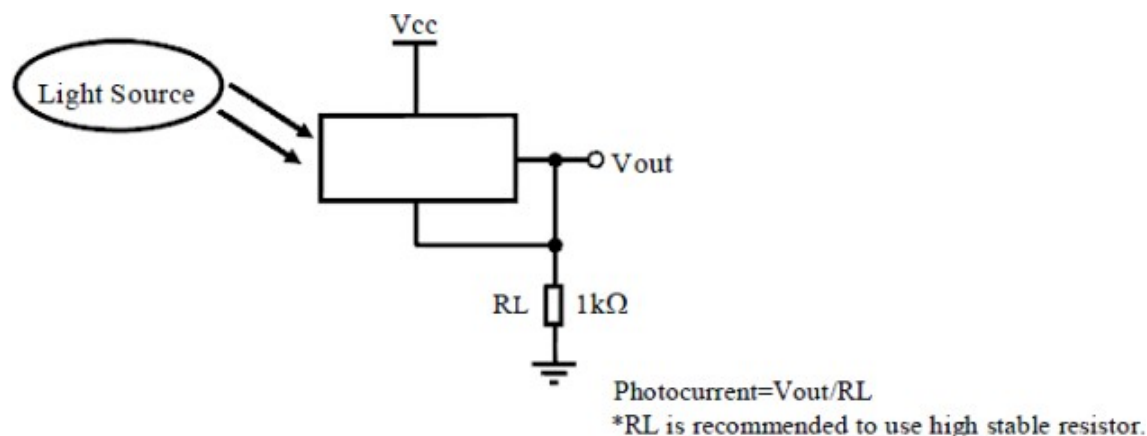

6.2 光电转换电路 photoelectric conversion circuit

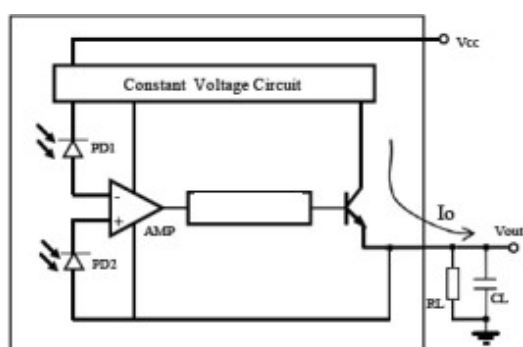

12. The output voltage (V_{OUT}) is the product of photocurrent (I_o) and loading resistor (R_L)
13. The value of the loading resistor should be chose properly to obtain the maximum output voltage under the maximum ambient light





$$V_{OUT(max.)} = I_{O(max.)} \times R_L < V_{Out(sat.)} = V_{CC} - 0.8V$$

14. The load capacitance should be selected to meet

$$R_L \times C_L > 0.5$$


to avoid 50Hz ripple from fluorescent lamps

7. 光电参数代表值特征曲线/ Typical Electrical-Optical Characteristics Curves

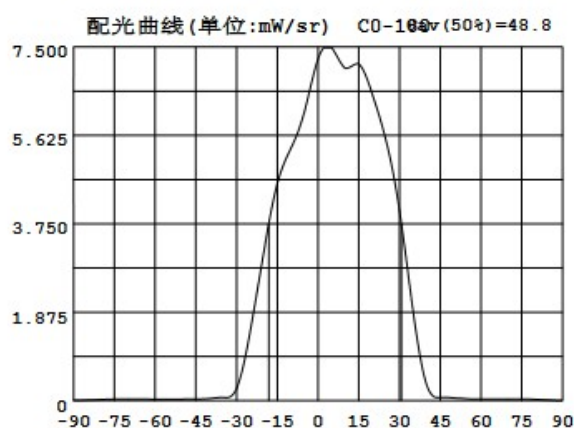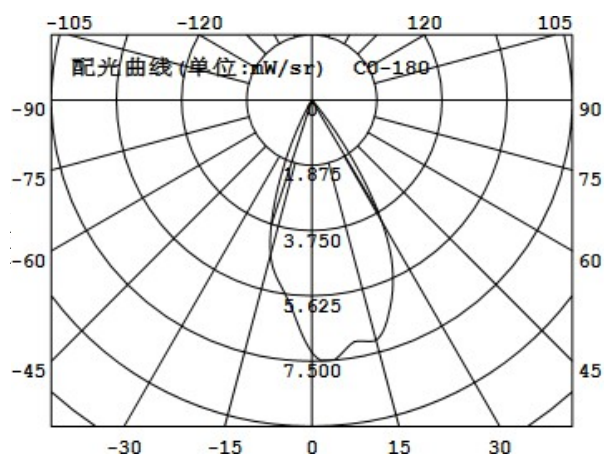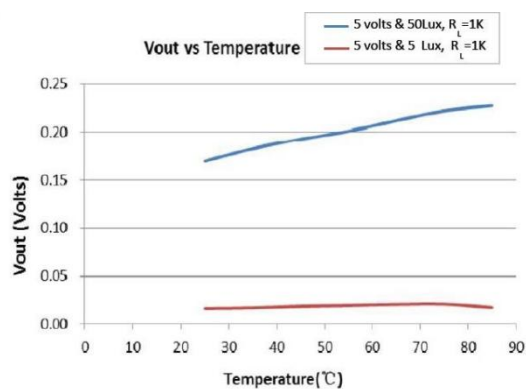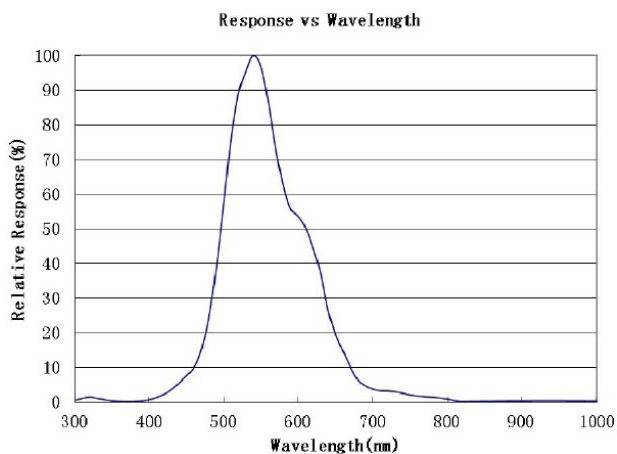


8. 包装载带与圆盘尺寸/ Reel And Tape Dimensions

包装数量: 2000 pcs/卷 Packing quantity: 2000 PCS/rolls

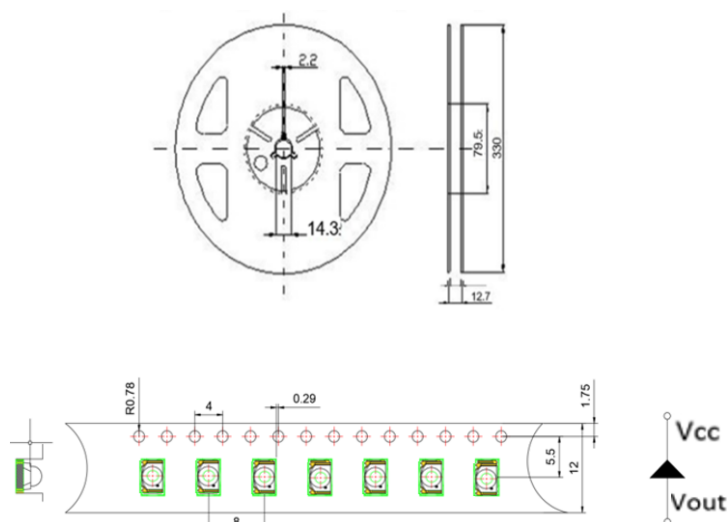

注/ Notes: 1. 尺寸单位为毫米(mm)/ All dimensions are in millimeters.
2. 尺寸公差是±0.1mm/ Tolerance is ± 0.1 mm unless otherwise noted.

标签及标识/ Label Explanation:

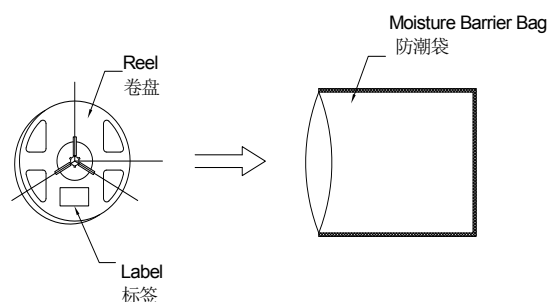

9. 信赖性测试项目及条件/Reliability Test Items And Conditions

测试项目 Test Item	Ref. Standard 参考标准	Test Condition 测试条件	Time 时间	Quantity 数量	Accepted/Rejected 接收/拒收
Reflow 回流焊	JETTA ED-4701 300301	Temp: 260°Cmax T=10 sec	3times	22	0/1
Thermal Shock 冷热冲击	MIL-STD-202G	-40°C 30min ↑ ↓ 100°C 30min	300 cycles	22	0/1
High Temperature Storage 高温保存	JETTA ED-4701 100103	Temp: 100°C	1000	22	0/1
Low Temperature Storage 低温保存	JETTA ED-4701 200202	Temp: -40°C	1000	22	0/1
Life Test 常温通电	JESD22-A108D	Ta=25°C IF=100mA	1000	10	0/1
High Temperature Life Test 高 温寿命	JESD22-A108D	Ta=85°C IF=100mA	1000H	10	
High Temperature / High Humidity 高温高湿	JETTA ED-4701 100103	60°C / 90%RH	1000H	22	0/1



失效判定标准 Criteria For Judging Damage

Test Items 项目	Symbol 符号	Test Condition 测试条件	Judging For Damage 判定标准	
			Min. 最小	Max. 最大
Forward Voltage 正向电压	VF	IF=50mA	-	U.S.L*)x1.1
Reverse Current 漏电流	IR	VR = 5V	-	U.S.L*)x2.0
集电极光电流 Collector Photocurrent	IC(ON)	Ev=100Lux VCE=5 V	L.S.L*)x0.7	

U. S. L: Upper standard level 规格上限

L. S. L: Lower standard level 规格下限

备注 / Note

信赖性测试基于永裕现有的测试平台

The Reliability tests are based on YongYu existing test platform

10. 注意事项/ Cautions:

10.1. 焊接/welding

10.1.1 SMD LED 灌封胶较软，外力易损坏发光面及塑料壳，焊接时要轻拿轻放。

SMD LED is soft and easy to damage the luminous surface and plastic shell by external force. It should be handled lightly when welding

10.1.2 建议使用易洗型的助焊剂，依照回流曲线条件回流焊接，回流次数最多两次，确保 LED 发光面干净，异物会影响发光颜色。

It is recommended to use soldering flux with tin wash type, reflow soldering according to the condition of reflux curve, reflow twice at most, ensure the LED luminous surface is clean, foreign matter will affect the luminous color.

10.1.3 只建议在修理和重工的情况下使用手工焊接，最高焊接温度不应超过 300 度，且须在 3 秒内完成（手工焊接只可焊接一次）烙铁最大功率应不超过 25W。

Manual welding is only recommended for repair and heavy industry;The maximum welding temperature should not exceed 300 degrees, and must be completed within 3 seconds (manual welding can only be welded once) soldering iron maximum power should not exceed 25W.

10.1.4 焊接过程中，严禁在高温情况下碰触胶体；焊接后，禁止对胶体施加外力，禁止弯折 PCB，避免元件受到撞击。

During the soldering process, do not touch the lens at high temperature, After soldering, any mechanical force on the lens or any excessive vibration shall not be accepted to apply, also the circuit board shall not be bent as well.

10.1.5 请不要将不同 BIN 级的 LED 使用于同一个产品上，否则可能会导致产品的严重色差。

Please do not use different BIN LED on the same product, otherwise it may cause serious color difference.



10.2. 清洗/cleaning

- 10.2.1 不能用超声波清洗, 建议使用异丙醇 (isopropyl alcohol)、纯酒精擦拭或浸渍(浸渍不超过 1 分钟)在室温下放置 15 分钟再使用; 清洗后, 确保 LED 发光面干净, 异物会影响发光颜色。

/No ultrasonic cleaning. It is recommended to use isopropyl alcohol, pure alcohol to wipe or soak, not more than 1 minute, and leave at room temperature for 15 minutes before use. After cleaning, make sure the LED luminous surface is clean and the foreign matter will affect the luminous color.

- 10.2.2 应避免接触或污染天那水, 三氯乙烯、丙酮、硫化物、氮化物、酸、碱、盐类, 这些物质会损伤 LED. Avoid touching or contaminating the water, trichloroethylene, acetone, sulfide, nitride, acid, alkali, and salts that can damage leds.

10.3. 灌封/embedment

- 10.3.1 挥发性物质会渗透到 LED 内部, 在通电产生光子及热的条件下, 会导致 LED 变色, 进而造成严重光衰, 严禁使用任何对 LED 器件的性能或者可靠性有害的物质或材料, 针对特定的用途和使用环境, 建议对所有的物质和材料进行相容性的测试。在贴装 LED 时候, 不要使用能产生有机挥发性气体的粘结剂。

Volatile substances to leach into the LED inside, photons in electricity and heat conditions, will lead to the LED color, thus causing serious droop, it is forbidden to use any of the LED device performance or reliability of harmful substances or materials, for a specific purpose and use of the environment, advice on all the material and the material compatibility test. When attaching LED, do not use adhesive that can produce volatile organic gas.

- 10.3.2 使用正常灌密封胶时, 建议先以少量试验, 常温点亮 168 小时, 确定没有问题再作业。

It is recommended to light up for 168 hours at room temperature for a small amount of test before using normal filling and sealing glue.

10.4. 保存/save

- 10.4.1 打开包装前, LED 应存储在温度 30℃或以下, 相对湿度在 RH60%以下, 一年内使用。

Before opening the package, LED should be stored in a temperature 30 °C or below, under RH60 % relative humidity, used in a year.

- 10.4.2 LED 是湿度敏感元件, 为避免元件吸湿, 打开包装后, LED 应在温度 30℃或以下, 相对湿度在 60%以内, 使用时间 7 天。LED 吸潮后, 回流焊时可能裂胶, 影响发光颜色。对于未使用的散件, 请去潮处理 (卷装品: 烘烤 60℃±5℃/24H; 散装品: 烘烤 105℃±5℃/1H), 然后再用铝箔袋密封后保存或者储存在氮气防潮柜内。

LED is humidity sensitive element, element to avoid moisture absorption, after open the packing, the LED should be in temperature 30 °C or below, within 60% relative humidity, using time 7 days. After moisture absorption, LED may crack when reflow soldering, influence the luminous color. For bulk is not used, please deal with the tide (for package product: bake 60 °C + / - 5 °C / 24 h. For bulk goods: baking 105 °C + 5 °C, 1 hours), and then save after sealed with aluminum foil bag or stored in nitrogen moistureproof enclosure

- 10.4.3 保存环境中避免有酸、碱以及腐蚀气体存在, 同时避免强烈震动及强磁场作用。

Avoid the presence of acid, alkali and corrosive gas in the preservation environment, and avoid strong vibration and strong magnetic field.

10.5. 静电/electrostatic



10.5.1 静电或峰值浪涌电压会损坏 LED,避免在开灯、关灯时产生瞬时电压。

Static electricity or peak surge voltage will damage the LED, avoiding instantaneous voltage when the lamp is turned on or off.

10.5.2 建议使用 LED 时佩戴防静电手腕带,防静电手套,穿防静电鞋,使用的设备、仪器正确接地。LED 损坏后,表现出漏电流明显增加,低电流正向电压变低,低电流点不亮等现象。

It is recommended to wear anti-static wrist bands, anti-static gloves and anti-static shoes when using LED. The equipment and instruments used are properly grounded. After the LED was damaged, the leakage current increased obviously, the forward voltage of low current became lower, and the low current point did not light, etc.

10.6 测试/test


10.6.1 LED 要在额定电流下驱动,同时电路中需要加限流电阻保护; 否则,轻微的电压变化就会引起较大的电流变化,从而破坏 LED。

LED shall be driven at rated current, and shall be protected by current-limiting resistance in the circuit. Otherwise, slight voltage changes will cause large current changes, which will damage the LED.

10.6.2 在电路导通或关闭情况下,要避免瞬间浪涌电压的产生,否则 LED 将被烧坏。

When the circuit is on or off, avoid sudden surge voltage. Otherwise, the LED will be burnt out

请参照下图示检测 LED:/Please check the LED as shown

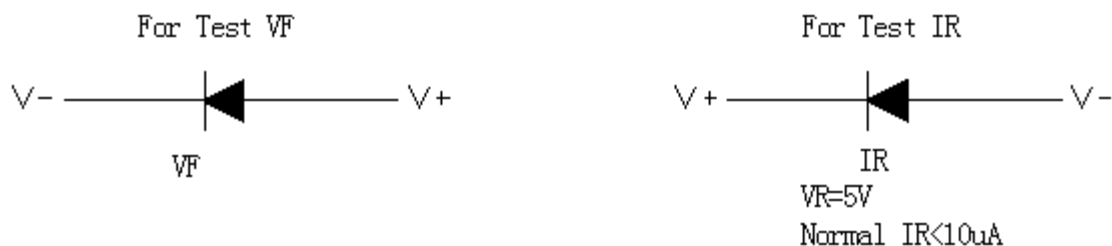

10.6.3 顺向电压 VF 过高或反向电压 VR 过高, 均会损坏 LED.


If the forward voltage VF is too high or the reverse voltage VR is too high, the LED will be damaged.

10.6.4 点亮或测试 LED 时, 加在 LED 两端的反向电压不得高于 5V, 否则容易击伤 LED.

When lighting or testing the LED, the reverse voltage added on both ends of the LED shall not be higher than 5V, otherwise it is easy to damage the LED.

10.6.5 LED 发光颜色会随着工作电流不同而有少许变化,建议设计时考虑电阻与 LED 串联使用。

LED luminous color will vary slightly with the working current. It is suggested that resistance and LED should be used in series in the design

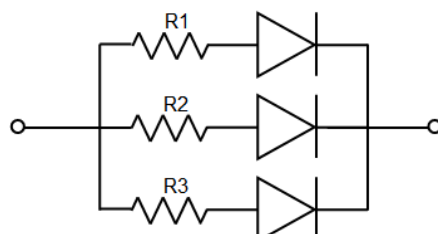

10.6.6 LED 容易因为自身的发热和环境的温度改变而改变，温度升高会降低 LED 发光效率，影响发光颜色在设计时应充分考虑散热问题。

LED is easy to change due to its own heat and changes in the temperature of the environment. The increase in temperature will reduce the luminous efficiency of LED, which will affect the luminous color. Heat dissipation should be fully considered in the design

Date 日期	Revisor 修订者	Version 版本	Verifier 审核	Remarks 备注
2024.10.21	Sylas	A0		新制作
2025.05.12	Sylas	A1		更新图示和包装数量
2025.06.21	Sylas	A2		更新参数内容
2025.08.05	Sylas	A3		更新包装示意图，由绿油负极 vcc 朝孔，改为不朝孔