



产品承认书

SPECIFICATION FOR APPROVAL

客户名称:

CUSTOMER

我司料号:

OUR PART NO.

XREP6-318B

我司品名:

OUR PART NAME

Surface-mount transformer

送样日期:

DATE SAMPLES

数量:

QUANTITY

制造确认 MANUFACTURER APPROVE

拟制 DRAWN	审核 CHECKED	确认 APPROVED
Hu Fangting	RapPing	LiZhengxiong

客户确认 CUSTOMER APPROVE

客户名称 CUSTOMER NAME:

客户料号 CUSTOMER P/N:

规格型号 DESCRIPTION:

EP6-318B 3.18mH±8%

检查结果: ☐ 合格 ☐ 不合格

签名及盖章:

INSPECT RESULT ACCEPT REJECT

SIGNATURE AND STAMP

说明 REMARK:

如对本承认书内容有异议请提出或标记发送至我司, 本承认书在未收到异议回复时于本承认书提供一周后生效。

If you have any objection to the contents of this acknowledgement, please put forward or mark it and send it to our company.

This acknowledgement will take effect one week after it is provided if you do not receive an objection reply.

东莞市祥如电子有限公司

Dongguan xiangru electronics co., ltd

Tel: 0769-86346548 Fax: 0769-86346358

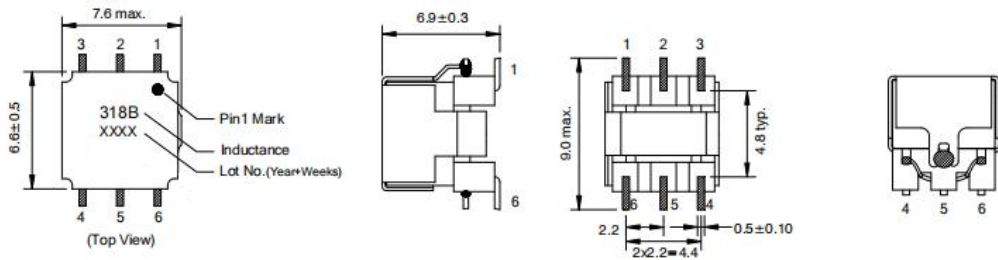
email: dgxiangru@126.com

产品承认书
SPECIFICATION FOR APPROVAL

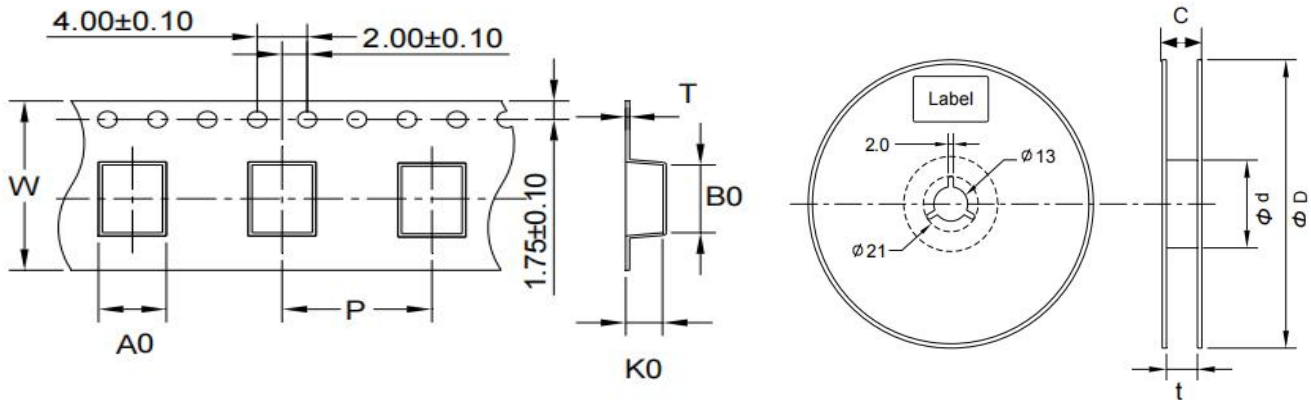
客户名称 CUSTOMER		日期 DATE	2024-6-21
客户物料编号 CUSTOMER P/N		客户规格型号 DESCRIPTION	EP6-318B 3.18mH±8%
我司物料编号 OUR PART NO	XREP6-318B	我司品名 OUR PART NAME	Surface-mount transformer

外观尺寸 Appearance of size

单位 Unit: mm



CARRIER TAPE DIMENSIONS(Unit:mm):



Type	A0	B0	K0	P	T	W	ΦD	Φd	C	T	Quantity[pcs/reel]
XREP6	7.7	9.3	7.3	12	0.35	24	380	100	30.5	24.5	750

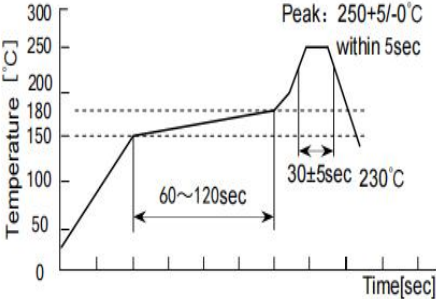



产品承认书
SPECIFICATION FOR APPROVAL


客户名称 CUSTOMER		日期 DATE	2024-6-21
客户物料编号 CUSTOMER P/N		客户规格型号 DESCRIPTION	EP6-318B 3.18mH±8%
我司物料编号 OUR PART NO	XREP6-318B	我司品名 OUR PART NAME	Surface-mount transformer

电性能参数
Electrical performance parameters

型号:	Figure	Inductance[mH]	Lk[μH] Max.	Test Conditions kHz 1V	D.C.R. [Ω] ±20%			Turns Ratio Pri-Sec	Marki ng	Electrical Schematic s
		4-6	4-6		1-2	2-3	4-6			
XREP6-318B	A	3.18±8%	150	52	0.63	0.60	23	1:1:11.75	318B	2

推荐回流条件（无锡焊料）


ELECTRICAL SCHEMATICS:


RECOMMENDED LAND PATTERN (Unit:mm)


存储条件 Storage conditions

- (1) 存放货物的库房应满足以下条件: 温度: -40 ~ +85℃, 相对湿度: 30 ~ 70%。The warehouse for storing goods shall meet the following conditions: temperature:-40 ~+85℃ and relative humidity: 30 ~ 70%.
- (2) 禁止将产品保管在腐蚀性物质中, 否则将引起端头氧化, 导致降低焊接性。It is forbidden to store the product in corrosive substances, otherwise it will cause oxidation of the end and reduce the weldability. It is forbidden to store the product in corrosive substances, otherwise it will cause oxidation of the end and reduce the weldability.
- (3) 为了避免受潮气、灰尘等物质的影响, 产品应保管于货架上。In order to avoid the influence of moisture, dust and other substances, the products should be kept on the shelves.
- (4) 产品保管在库房中, 应避免热冲击、振动以及直接光照等等。When the products are stored in the warehouse, thermal shock, vibration and direct light should be avoided.
- (5) 产品应密封包装。Products should be sealed and packaged.

制表 MADE	审核 CHECKED	批准 APPROVED	
HuFangting	RaoPing	LiZhengxiong	