


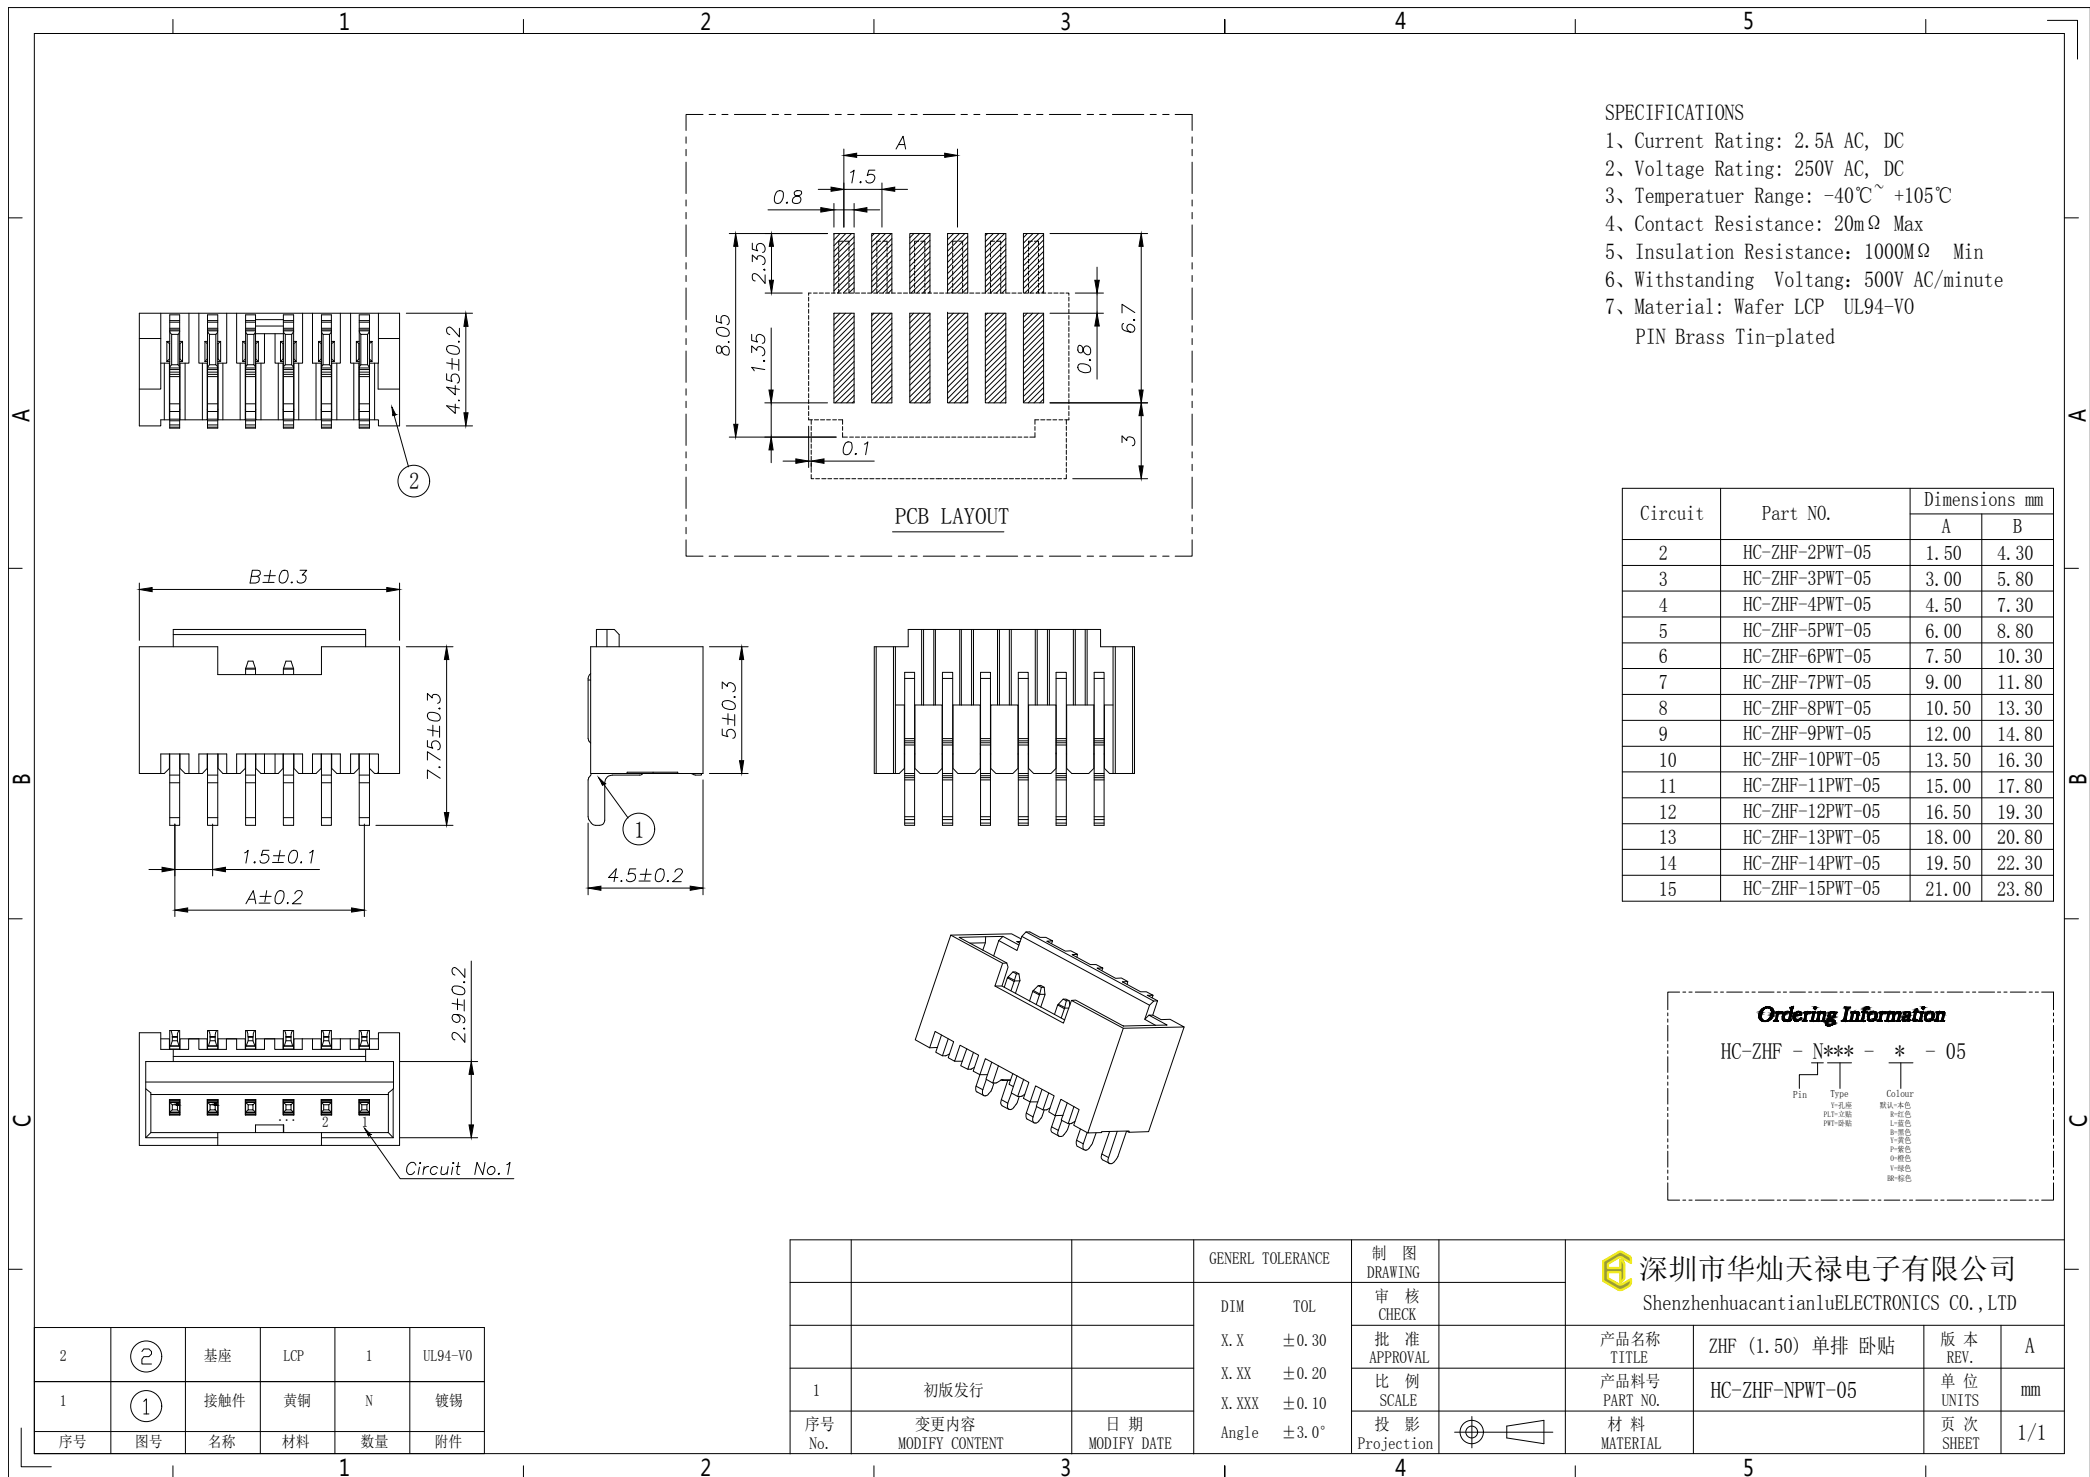

SPECIFICATIONS

- 1、Current Rating: 2.5A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -40℃~ +105℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material: Wafer LCP UL94-V0
PIN Brass Tin-plated

Circuit	Part NO.	Dimensions mm	
		A	B
2	HC-ZHF-2PWT-05	1.50	4.30
3	HC-ZHF-3PWT-05	3.00	5.80
4	HC-ZHF-4PWT-05	4.50	7.30
5	HC-ZHF-5PWT-05	6.00	8.80
6	HC-ZHF-6PWT-05	7.50	10.30
7	HC-ZHF-7PWT-05	9.00	11.80
8	HC-ZHF-8PWT-05	10.50	13.30
9	HC-ZHF-9PWT-05	12.00	14.80
10	HC-ZHF-10PWT-05	13.50	16.30
11	HC-ZHF-11PWT-05	15.00	17.80
12	HC-ZHF-12PWT-05	16.50	19.30
13	HC-ZHF-13PWT-05	18.00	20.80
14	HC-ZHF-14PWT-05	19.50	22.30
15	HC-ZHF-15PWT-05	21.00	23.80

Ordering Information

HC-ZHF - N*** - * - 05

Pin Type Colour
Pin 1: 1.50mm
Pin 2: 1.50mm
Pin 3: 1.50mm
Pin 4: 1.50mm
Pin 5: 1.50mm
Pin 6: 1.50mm
Pin 7: 1.50mm
Pin 8: 1.50mm
Pin 9: 1.50mm
Pin 10: 1.50mm
Pin 11: 1.50mm
Pin 12: 1.50mm
Pin 13: 1.50mm
Pin 14: 1.50mm
Pin 15: 1.50mm

2	②	基座	LCP	1	UL94-V0
1	①	接触件	黄铜	N	镀锡
序号	图号	名称	材料	数量	附件

			GENERAL TOLERANCE	制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK					
			X. X ± 0.30	批 准 APPROVAL		产品名称 TITLE	ZHF (1.50) 单排 卧贴	版 本 REV.	A
1	初版发行		X. XX ± 0.20	比 例 SCALE		产品料号 PART NO.	HC-ZHF-NPWT-05	单 位 UNITS	mm
			X. XXX ± 0.10	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ± 3.0°						