

NO.

ECAB2301020

Acknowledgement Book

Customer : _____

Production name: HC-49S X'TAL 11.50×4.70×3.68



Nominal Freq. : 3.579545MHz

Customer P/N : _____

P/N : B03579J061

Receiver

Please return one after acknowledgement
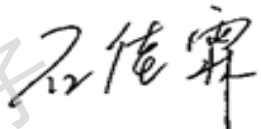
| Approved By | MFG | QA | PE/RD |
|---|---|--|---|
|  |  |  |  |

BOOK OF MODIFICATION

| No. | DATE | CONTENT OF MODIFICATION | REASON OF MODIFICATION | PAGE | ITEM | APPROVE |
|-----|----------|-------------------------|------------------------|------|------|---------|
| 0 | 2023/1/9 | INITIAL RELEASED | | | | |
| 1 | | | | | | |
| 2 | | | | | | |
| 3 | | | | | | |
| 4 | | | | | | |
| 5 | | | | | | |
| 6 | | | | | | |
| 7 | | | | | | |
| 8 | | | | | | |
| 9 | | | | | | |
| 10 | | | | | | |
| 11 | | | | | | |
| 12 | | | | | | |
| 13 | | | | | | |
| 14 | | | | | | |
| 15 | | | | | | |
| 16 | | | | | | |
| 17 | | | | | | |
| 18 | | | | | | |
| 19 | | | | | | |
| 20 | | | | | | |

QUARTZ CRYSTAL UNITS

No:

ECAB2301020

Date:

2023/1/9

SPECIFICATION OF QUARTZ CRYSTAL UNITS

1.HOLDER TYPE HC-49S X'TAL 11.50×4.70×3.68

2.GENERAL

| | |
|---|--------------------------|
| 2-1 FREQUENCY (F0) | 3.579545MHz |
| 2-2 MODE OF OSCILLATION (Mn) | FUNDAMENTAL |
| 2-3 OPERATION TEMPERATURE RANGE (T ₀) | -40℃ ~ +85℃ |
| 2-4 STORAGE TEMPERATURE RANGE (Ts) | -50℃/+125℃ |
| 2-5 TEST SET | S&A 250B ANALYSIS SYSTEM |
| 2-6 DRIVE LEVEL (DL) | 100μw TYPE (500μw MAX) |
| 2-7 LOADING CAPACITANCE (CL) | 20PF |


3.ELECTRICAL CHARACTERISTICS

(This test shall be performed under the condition of temperature at 25±3℃.)

| | |
|--------------------------------|--|
| 3-1 FREQUENCY TOLERANCE (Δf) | ±10 ppmMAX |
| 3-2 EQUIVALENT RESISTANCE (Rr) | 120ΩMax/Series |
| 3-3 TEMPERATURE DRIFT (Tc) | ±30ppm/MAX -40℃+85℃ |
| 3-4 SHUNT CAPACITANCE (Co) | <7.0PF |
| 3-5 INSULATION RESISTANCE | 500MΩmin/DC 100V±15V (Lead to lead ,case to lead) |

4.DIMENSIONS AND MARKING

4-1 HOLDER TYPE HC-49S X'TAL 11.50×4.70×3.68

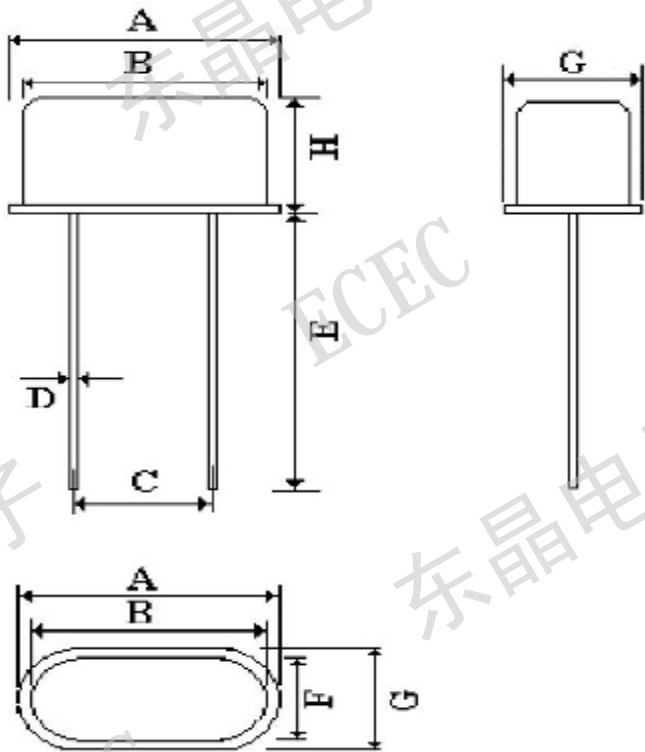

JinHua East Crystal Electronic
Co.,Ltd.

DESIGN

郑紫薇

INSPECTION

王晓东

QUARTZ CRYSTAL UNITS

No:

ECAB2301020

Date:

2023/1/9

4-2 DIMENSION (mm)


| | HC-49U/S |
|---|-----------|
| A | 11.50MAX |
| B | 10.30MAX |
| C | 4.88±0.2 |
| D | 0.45±0.05 |
| E | 13.2±0.5 |
| F | 3.80MAX |
| G | 4.70MAX |
| H | 3.68MAX |

可根据客户需求放绝缘垫片

4-3 MARKING

HC-49S

Corporation name

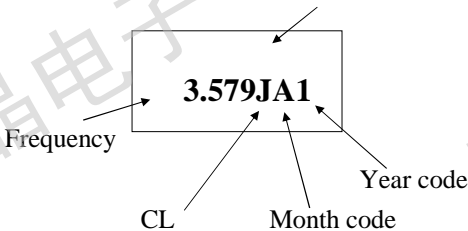

Frequency: as shown in the table
EX)

| Frequency | 4.000MHz | 16.9344MHz | 20.000MHz |
|----------------|----------|------------|-----------|
| Frequency Code | 4.000 | 16.934 | 20.000 |

Month code: as shown in the table

EX) December shall be marked as "M"

| Month | Jan. | Feb. | Mar. | Apr. | May. | Jun. | Jul. | Aug. | Sep. | Oct. | Nov. | Dec. |
|--------|------|------|------|------|------|------|------|------|------|------|------|------|
| Symbol | A | B | C | D | E | F | G | H | J | K | L | M |

Year code: as shown in the table

EX) 2021 Shall be marked as "1"

| Year | 2020 | 2021 | 2022 | 2023 | 2024 | 2025 | 2026 | 2027 | 2028 | 2029 | 2030 | ---- |
|--------|------|------|------|------|------|------|------|------|------|------|------|------|
| Symbol | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | ---- |

JinHua East Crystal Electronic Co.,Ltd.

DESIGN

INSPECTION

郑紫薇

王晓东

QUARTZ CRYSTAL UNITS

No:

ECAB2301020


Date:

2023/1/9

4-4 PACKING

Put 200pcs crystals into a plastic bags with bubbly sheet surrounded into inner-box,put 20 inner-boxes with foam sheet surrounded into a paper case, then write HOLD.FREQ.QTY in inner-box and paper case.





1.INNER BOX : (Unit : mm)

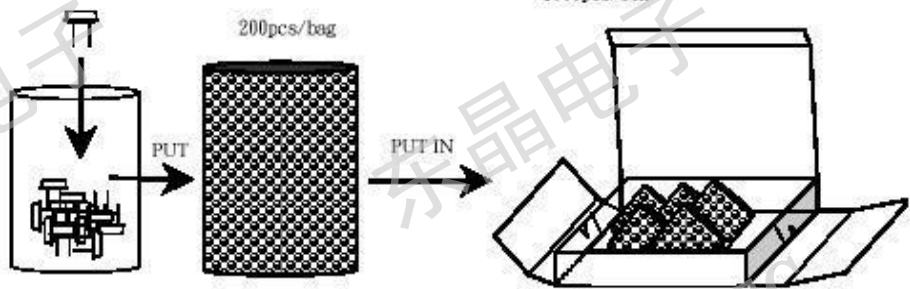

2.LOGO STICKER(CARTON and INNER BOX) : (Unit : mm)

Label a

| CRYSTAL UNITS | |
|---------------|--|
| CUST P/N | |
| ECEC P/N | |
| P/O | |
| FREQUENCY | |
| QTY | |
| MARKING | |
| MADE IN CHINA | |

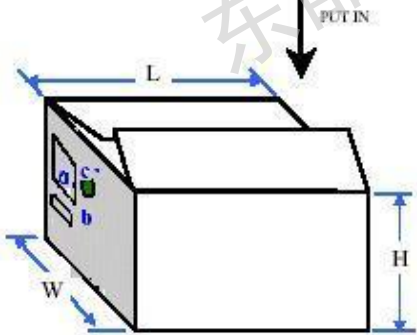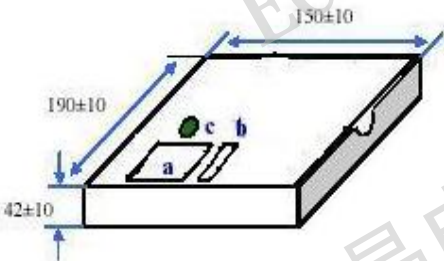

| Box type | size (L×W×H) mm |
|---------------------|-----------------|
| Atype (Box 1~3K) | 200×200×165 |
| Btype (Box 4~6K) | 205×205×290 |
| CBtype (Box 7~10K) | 400×205×290 |
| DBtype (Box 11~20K) | 420×320×250 |

JinHua East Crystal Electronic Co.,Ltd.

DESIGN

郑紫薇

INSPECTION

王晓东

QUARTZ CRYSTAL UNITS

No:

ECAB2301020

Date:

2023/1/9

5.MECHANICAL ENDURANCE

Provided that measurement shall be carried out after letting it alone in the room temperature for 1 hour.

5-1.SHOCK

Electrical characteristics shall be satisfied after dropping three times from the height of 75cm onto the board of the 3cm thickness.

5-2.VIBRATION

Electrical characteristics shall be satisfied after supplying following vibration.

- | | |
|---------------------------|-----------------------|
| a).ENTIRE FREQUENCY RANGE | 10~55Hz |
| b).REPEATED PERIOD | 1~2min |
| c).AMPLITUDE | 1.5mm |
| d).DIRECTION | X.Y.Z |
| e).PERIOD | 2hours/Each Direction |

5-3.STRENGTH OF TERMINALS/LEAD-WIRES

①TENSILE

- Body of specimen shall be fixed,and 900g of tension weight shall be supplied gradually to axial direction of terminals/lead-wires for 30 sec.
- After above test a),there is no distinct damage or damage to sealing.

②BENDING

- Body of specimen shall be fixed,and 90 degree bending shall be given,being supplied 225g tension weight.After that,terminals/lead-wires shall be straightened gradually. Then the same bending and straightening shall be supplied to the opposite direction in the same axial.
- After above test a),there is no observation of any visual damages on the specimen.

5-4.SEALING TIGHTNESS

Put the specimens in C_2H_5OH ,raise pressure it with 0.5Mpa for 10 min, test the insulation resistance at DC.100V,the result shall be over 500M Ω .
Electrical characteristics shall be satisfied and no sealing damage.

**JinHua East Crystal Electronic
Co.,Ltd.**

DESIGN

郑紫薇

INSPECTION

王晓东

QUARTZ CRYSTAL UNITS

No:

ECAB2301020

Date:

2023/1/9


5-5.SOLDERING HEAT RESISTANCE

Electrical characteristics shall be satisfied .Without distinct looseness of terminals.

①.FLOW(WAVE)SOLDERING

Following profile of heat stress is applied to resonator,then being place in the natural condition for 1 hour,resonator shall be measured.

Recommendation of flow condition for Lead-Free solder

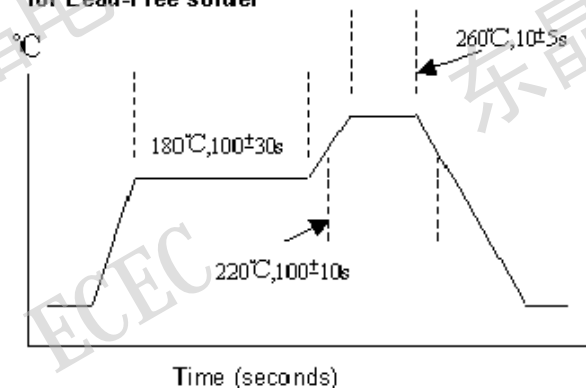

| | |
|--|----------|
| Peak temperature | 260°C |
| Dipping time | 10±5 sec |
| Soldering | 1 time |
| Dipping to the lead joint of component | |

②.SOLDERING DIP

Terminals/lead-wires of specimen shall be dipped into solder melter tank at $+230^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 3 sec.

Dipping depth shall be 2mm from the bottom of specimens body.(After applying ROSIN FLUX) soldering portion shall be covered in over 95% of Terminals/lead-wires dipped.

5-6.BEND STRENGTH PCB

①.Resonator is soldered into the ceater of PCB which is laid on the 2 small supporters spaced 90cm. PCB deflected to 1mm below from horizontal level by the pressing force with 20 x10.R10 stick.

The force is supplied for 1 second,5 times repeatedly.

②.After above test ①.there is no observation of any visual damages on specimen and the electical characteristic shall be satisfied.

JinHua East Crystal Electronic Co.,Ltd.

DESIGN

郑紫薇

INSPECTION

王晓东

QUARTZ CRYSTAL UNITS

No:

ECAB2301020

Date:

2023/1/9

5-7.ENVIRONMENTAL ENDURANCE

Provided that measurement shall be carried out after letting it alone in the room temperature for 1 hour.

①HUMIDITY

Electrical characteristics shall be satisfied after letting it alone at $65\pm 2^{\circ}\text{C}$ in humidity of 90~95% for 250 hours.

②.STORAGE IN LOW TEMPRATURE


Electrical characteristics shall be satisfied after letting it alone at $-45\pm 2^{\circ}\text{C}$ for 250 hours.

③.STORAGE IN HIGH TEMPRATURE

Electrical characteristics shall be satisfied after letting it alone at $85\pm 2^{\circ}\text{C}$ for 250 hours.

④.TEMPERATURE CYCLE

Electrical characteristics shall be satisfied after supplying the following temperature cycle(3cycle).Temperature shift from low to high, high to low shall be done in $1^{\circ}\text{C}/\text{sec}$.
(refer to Fig-3)

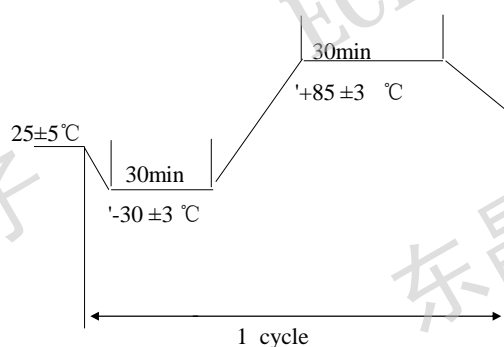

(Fig-3)

**JinHua East Crystal Electronic
Co.,Ltd.**

DESIGN

郑紫薇

INSPECTION

王晓东

QUARTZ CRYSTAL UNITS


No:

ECAB2301020

Date:

2023/1/9

6. Structure Illustration

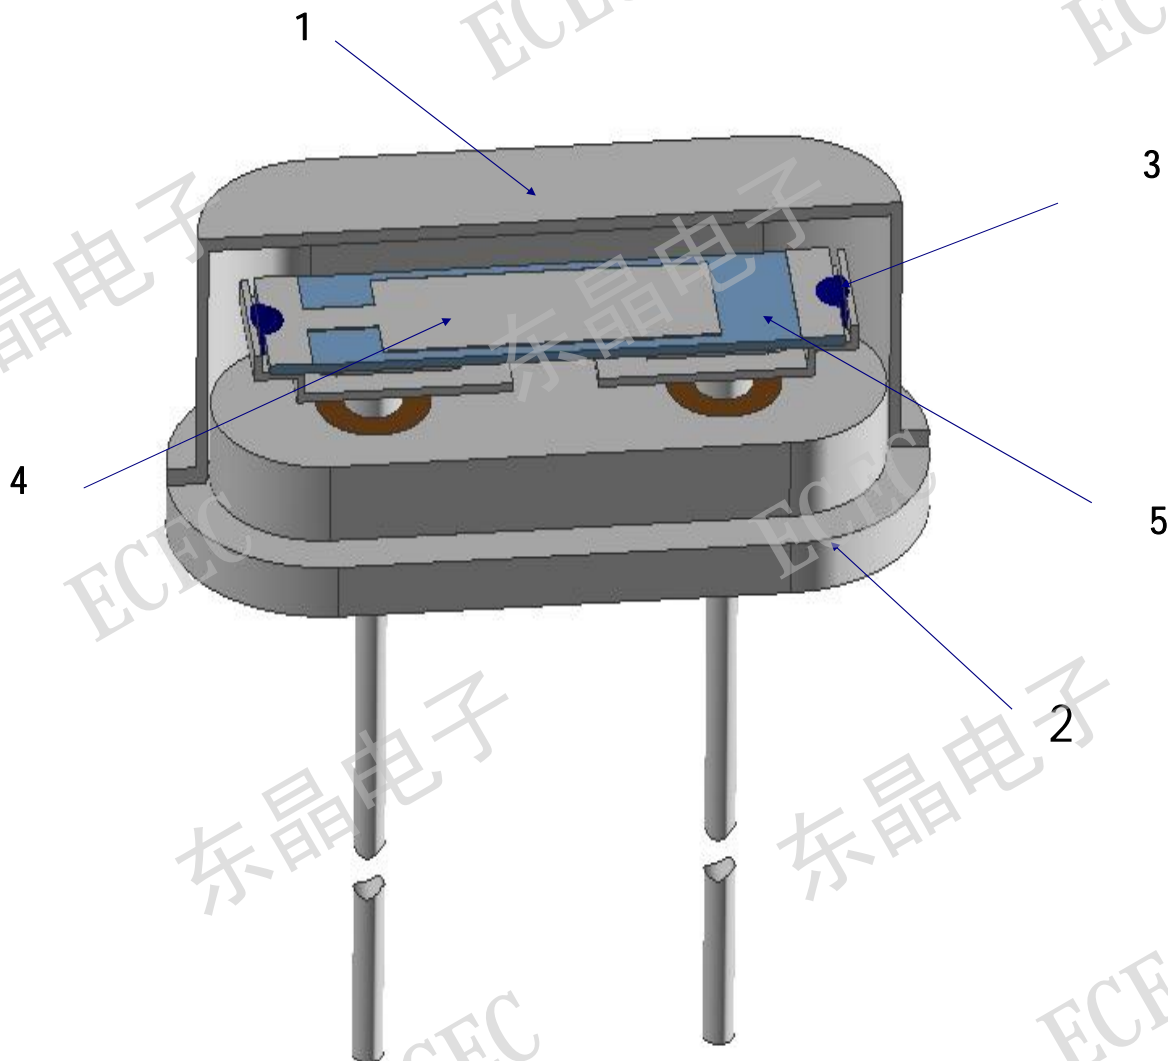

(BOTTOM VIEW)

| No. | Items | Materials | Manufacture's name |
|-----|---------------------|------------------|-----------------------|
| 1 | Metal Can(Cap) | Ni Alloy | FENGJIANG |
| 2 | Substrate(Base) | Kovar (Pb free) | XURI ELEC. CHINA |
| 3 | Conductive Adhesive | Ag+Epoxy Resin | Shanghai TOP Sunshine |
| 4 | Internal Electrode | Ag | SOLAR CHINA |
| 5 | Element(Blank) | SiO ₂ | ECEC CHINA |

**JinHua East Crystal Electronic
Co.,Ltd.**

DESIGN

郑紫薇

INSPECTION

王晓东