



Microfuse RoHS & Pb-free
好利® 保险丝管



产品规格书

PRODUCT SPECIFICATION

方型超微表面贴片式保险丝（慢断型）

SMD NANO FUSE (SLOW-BLOW)

25T RoHS&Pb-Free SERIES

编码: A07 HLD-PSI-8167 2022/08/05

制定:

PREPARED BY

叶小坤
2022.08.05

审核:

CHECKED BY

胡兴华
2022.08.05

批准:

APPROVED BY

苏毅镇
2022.08.05



好利来（厦门）电路保护科技有限公司
Hollyland (Xiamen) Technology Corporation Limited
福建厦门市翔安区舫山东二路829号 361101
T +86 592 577 2288
M sdxm@hollyfuse.com
W www.hollyfuse.com



目录

Table of Contents

一、适用范围Scope.....	3
二、相关标准及认证情况Applicable Standards&Approved Details	4
三、外形尺寸与原材料Dimension & Materials.....	4
四、机械特性Mechanical Performances.....	5
五、电气特性Electrical Performances.....	5
六、产品标志Markings	9
七、包装要求Packing Details	9
八、环境性能Environmental Performances.....	10
九、信赖性试验Reliability Test	10

1. 适用范围/SCOPE

本规格书适用于公司生产并获得 UR、cUR 认证的 25TRoHS&Pb-Free 系列 HOLLY®商标的表面贴装型慢断保险丝管。

This specification defines the technical requirements of Surface Mount Slow-blow type 25TRoHS&Pb-Free series with HOLLY® brand, which has been approved by UR&cUR.

产品部件号为: 型号额定电流额定电压

Construction of Part No.: Type Rated Current Rated Voltage

例如 For Example: 25T0500L

额定电压 Rated Voltage: H---250V AC (200mA -5A)

L---125V DC/AC (200mA -5A)

产品部件号 PART NUMBER

产品部件号 Part Number	额定电流 Rated Current	标识 Marking	额定电压 Rated Voltage	电阻 Nominal Resistance(Ohms)	参考熔化 I^2t Normal Melting $I^2t(A^2Sec.)$ (t=8ms)
25T-0200H/L	200mA	T0.2	250V AC 125V DC/AC	1.5000	0.060
25T-0250H/L	250mA	T0.25		0.8600	0.080
25T-0300H/L	300mA	T0.3		0.7400	0.120
25T-0315H/L	315mA	T0.315		0.6400	0.130
25T-0375H/L	375mA	T0.375		0.5000	0.220
25T-0400H/L	400mA	T0.4		0.4300	0.250
25T-0500H/L	500mA	T0.5		0.3400	0.449
25T-0600H/L	600mA	T0.6		0.2100	0.496
25T-0630H/L	630mA	T0.63		0.1950	0.630
25T-0750H/L	750mA	T0.75		0.1500	0.845
25T-0800H/L	800mA	T0.8		0.1280	1.16
25T-010H/L	1A	T1		0.1550	1.88
25T-012H/L	1.2A	T1.2		0.1260	3.10
25T-013H/L	1.25A	T1.25		0.1230	3.56
25T-015H/L	1.5A	T1.5		0.0910	4.49
25T-016H/L	1.6A	T1.6		0.0860	4.98
25T-020H/L	2A	T2		0.0450	5.18
25T-025H/L	2.5A	T2.5		0.0350	10.66
25T-030H/L	3A	T3		0.0280	14.01
25T-032H/L	3.15A	T3.15		0.0260	15.04
25T-035H/L	3.5A	T3.5		0.0240	15.51
25T-038H/L	3.75A	T3.75		0.0220	21.39
25T-040H/L	4A	T4		0.0185	24.22
25T-050H/L	5A	T5		0.0145	32.39

2. 相关标准及认证情况 APPLICABLE STANDARDS & APPROVED DETAILS

2.1 相关标准 APPLICABLE STANDARDS


UL 248-1, UL 248-14, CSA C22.2 No. 248.1-00, CSA C22.2 No. 248.14-00.

2.2 认证情况 APPROVED DETAILS

额定电压 RATED VOLTAGE	UR &cUR	
	认证范围 APPROVED RANGE	认证号码 CERT.No.
250V AC	200mA - 5A	E156471
125V DC/AC	200mA - 5A	E156471

3. 外形尺寸与原材料 DIMENSION & MATERIALS

3.1 外形尺寸 DIMENSION: 单位 Unit: mm

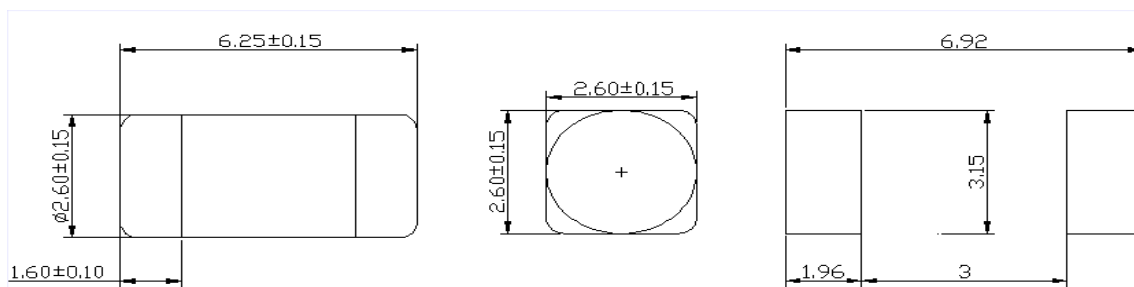

Recommended pad layout

3.2 原材料 MATERIALS

编号 No.	部件 PARTS	材料 MATERIALS	备注 REMARK
1	焊锡 Solder	无铅焊锡 Pb Free Solder	符合 RoHS&Pb-Free 指令 要求 RoHS&Pb-Free Compliant
2	可熔体 Fusible Element	金属丝+玻璃纤维 Alloy + Glass Fibre	
3	管体 Tube	陶瓷管 Ceramic Tube	
4	外帽 External Cap	黄铜镀镍 $\geq 1\mu\text{m}$, 镀锡 $\geq 1\mu\text{m}$ No less than $1\mu\text{m}$ Ni plated Brass, then no less than $1\mu\text{m}$ Sn plated	
5	内帽 Inner Cap	黄铜 Brass	

3.3 陶瓷管 CERAMIC TUBE

陶瓷管必须无缺陷如破裂、缺损、污染。

The ceramic tube shall have no defects such as crack, injury and contamination.

3.4 铜帽 CAP

铜帽应被牢固固定在管体两端，以保证在未损坏熔断体时，铜帽不能被卸下。铜帽表面镀层应牢固不易脱落。
Cap should be firmly attached to the both ends of the tube so that it is not possible to remove them without damaging the fuse itself. The cap plated layer is not easy to fall off.

4. 机械特性 MECHANICAL PERFORMANCES

保险丝应安装在 1.6mm 厚的覆铜箔环氧玻璃布层压板的试验板上，将试验板装有保险丝的一面向下，放在弯曲夹具上，试验板以 1mm/s 的速率弯曲到 1mm。试验板应允许从弯曲位置恢复过来，并从试验夹具上拆下。试验结束后，保险丝端电极仍应固定牢固。

The fuse-links shall be mounted on the test board, which is made of epoxide woven glass fabric copper-clad laminated 1.6mm thickness sheet. The test board, with the fuse-links on the underside, shall be placed in the bending jig. The board shall then be bent by 1mm at the rate of 1 mm/s. The test board shall be allowed to recover from the bent position, and then be removed from the test jig. After the test, the terminals shall remain firmly attached.

5. 电气特性 ELECTRICAL PERFORMANCES

5.1 测试条件 TEST CONDITIONS

A. 全部测试条件都应在环境温度 $25 \pm 5^\circ\text{C}$ 条件下进行，在此期间温度变化不允许达到 5°C 和到极限范围。

All electrical tests shall be conducted at an ambient temperature of $25 \pm 5^\circ\text{C}$. The ambient temperature shall not vary more than 5°C during the test, and must be within these limits.

B. 当两个或两个以上的保险丝串联测试时，保险丝管座的放置位置应保证使任何两个进行测试的保险丝所用的保险丝管座之间的间隙不能小于 50mm。将保险丝管座连在一起的导线以及将保险丝管座与测试电路直接相连接的任何电流测试装置相连，及其与电源相连的连接线为带绝缘的铜导线。每根导线的长度应为 250mm，而且该导线的横截面积约为 1mm^2 。

When two or more fuse-links are tested in series, the test fuse-bases shall be located so that there will be a spacing of not less than 50mm between any two fuse-links under test. The conducting wire connecting the test fuse-bases together, and the one connecting the test fuse-bases to any current measuring devices connected directly to the test circuit and the source of supply, shall be insulated copper wire. The length of each conducting wire shall be 250 mm, and the cross-sectional area of the wire shall be approximately 1mm^2 .

5.2 负载能力测试 CURRENT-CARRYING CAPACITY TEST

当保险丝通以 100% 额定电流的条件下进行测试时，在 4 小时内电路不应断开，保险丝不被电流熔化，管壳不破裂和烧焦。

When a fuse is carrying 100% of rated current for continuing 4 hours, no open circuit, melt fusible element, or ruptured tube shall occur in any manner during this test.

5.3 温度上升试验 TEMPERATURE RISING TEST

当保险丝通以 100% 额定电流的条件下进行测试时，在达到热量平衡后，测量保险丝表面的温度，保险丝表面的温度上升必须等于或低于 75°C 。

Measure the temperature of the surface of the fuse under the 100% of rated current, when the thermal equilibrium reaches. The temperature rise on the surface of each fuse shall be 75°C or less.

注：温度上升 = 保险丝表面的温度 - 环境温度

Note: Temperature Rising = Fuse temperature - Ambient temperature

5.4 预飞弧时间/电流特性 PRE-ARCING TIME / CURRENT CHARACTERISTICS

当保险丝通以下表规定的电流时，其熔断时间必须符合下表的要求，且铜帽不能飞脱、陶瓷管不应破裂、损坏。

When the current in the following table is passing the fuse, its opening time must be in accordance with the requirements in the following table. Moreover, no damage of the fuse-tube or shattering of the cap shall occur.

%额定电流 % of Rated Current	熔断时间 Opening Time
100%	最快 4 小时 4 hours Min.
200%	最快 1 秒, 最慢 60 秒 1 seconds Min., 60 seconds Max.
300%	最快 0.2 秒, 最慢 3 秒 0.2 seconds Min., 3 seconds Max.
800%	最快 0.01 秒, 最慢 0.1 秒 0.01 seconds Min., 0.1 seconds Max.

5.5 分断能力 INTERRUPTING RATING

这些型号的保险丝的分断能力应能达到下表规定的相应的各种安全认证的分断能力要求。保险丝分断电路后，保险丝管不应破裂、铜帽飞脱、且铜帽两端的绝缘电阻不小于 10,000 Ω @ 500V DC。

The interrupting rating should reach the interrupting current rating given in the following table. And after this test, there should be no damage of the fuse-tube or shattering of the caps. After this test, the insulation resistance between the end caps shall be not less than 10,000 Ω @ 500V DC.

额定电流 RATED CURRENT	UR &cUR
	分断能力 INTERRUPTING RATING
200mA- 5A	50A@250V AC
200mA- 5A	100A@125V DC/AC

5.6 电阻测试 COLD RESISTANCE TEST

环境温度为 25±5°C，测试电流不大于保险丝额定电流的 10%。


Test current less than or equal to 10% of rated current to the fuse for cold resistance test at an ambient temperature of 25±5°C.

5.7 焊接参数 SOLDERING PARAMETERS


- 1) 红外线回流焊 Infrared Reflow soldering ---240°C最高, 最大 10 秒 240°C Maximum, 10 seconds Maximum;
- 2) 手工焊 Manual soldering ---350°C最高, 最大 5 秒 350°C Maximum, 5 seconds Maximum.

焊接烙铁尖端不应该直接与保险丝端部接触 Soldering Iron shall be used and its tip shall not contact the fuse terminals directly.


5.8 环境温度对负载能力的影响 AMBIENT TEMPERATURE EFFECT ON CURRENT-CARRYING CAPACITY

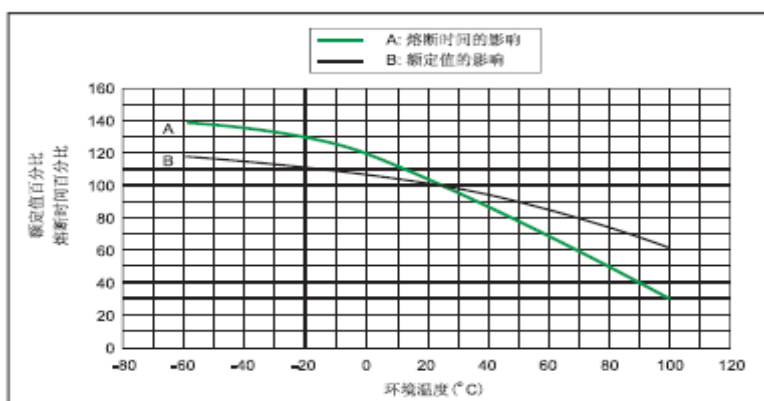

6.9 平均 I-T 特性曲线图(仅供参考) THE AVERAGE I-T CHARACTERISTICS CURVE (For Reference Only)

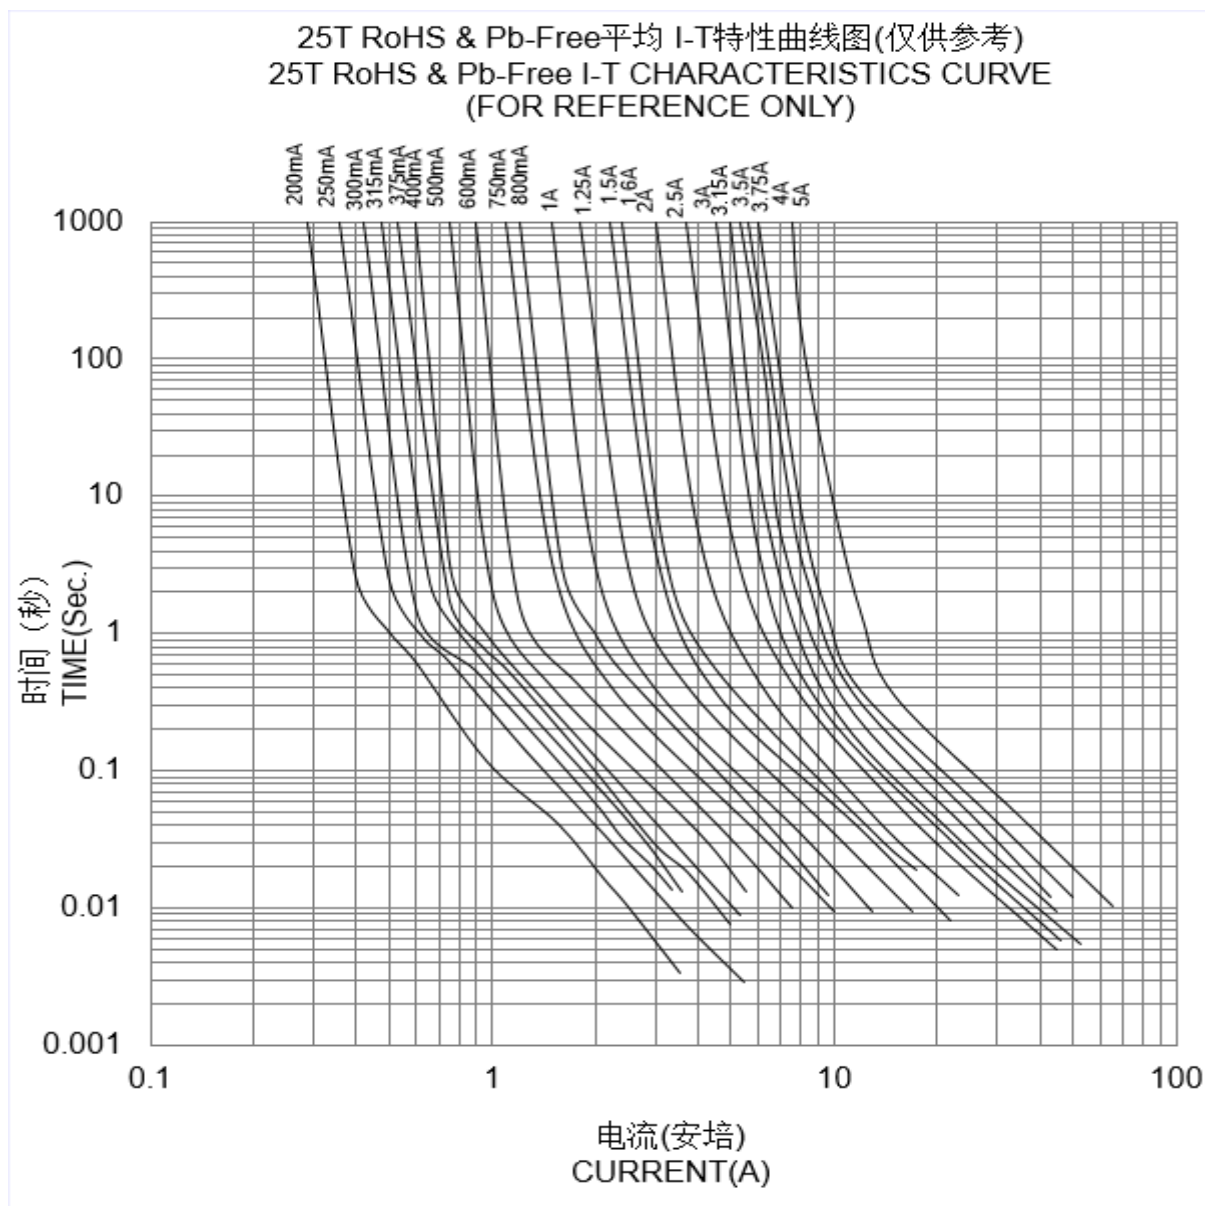

5.10 平均 I^2T -T特性曲线图((仅供参考) THE AVERAGE I^2T -T CHARACTERISTICS CURVE (For Reference Only)

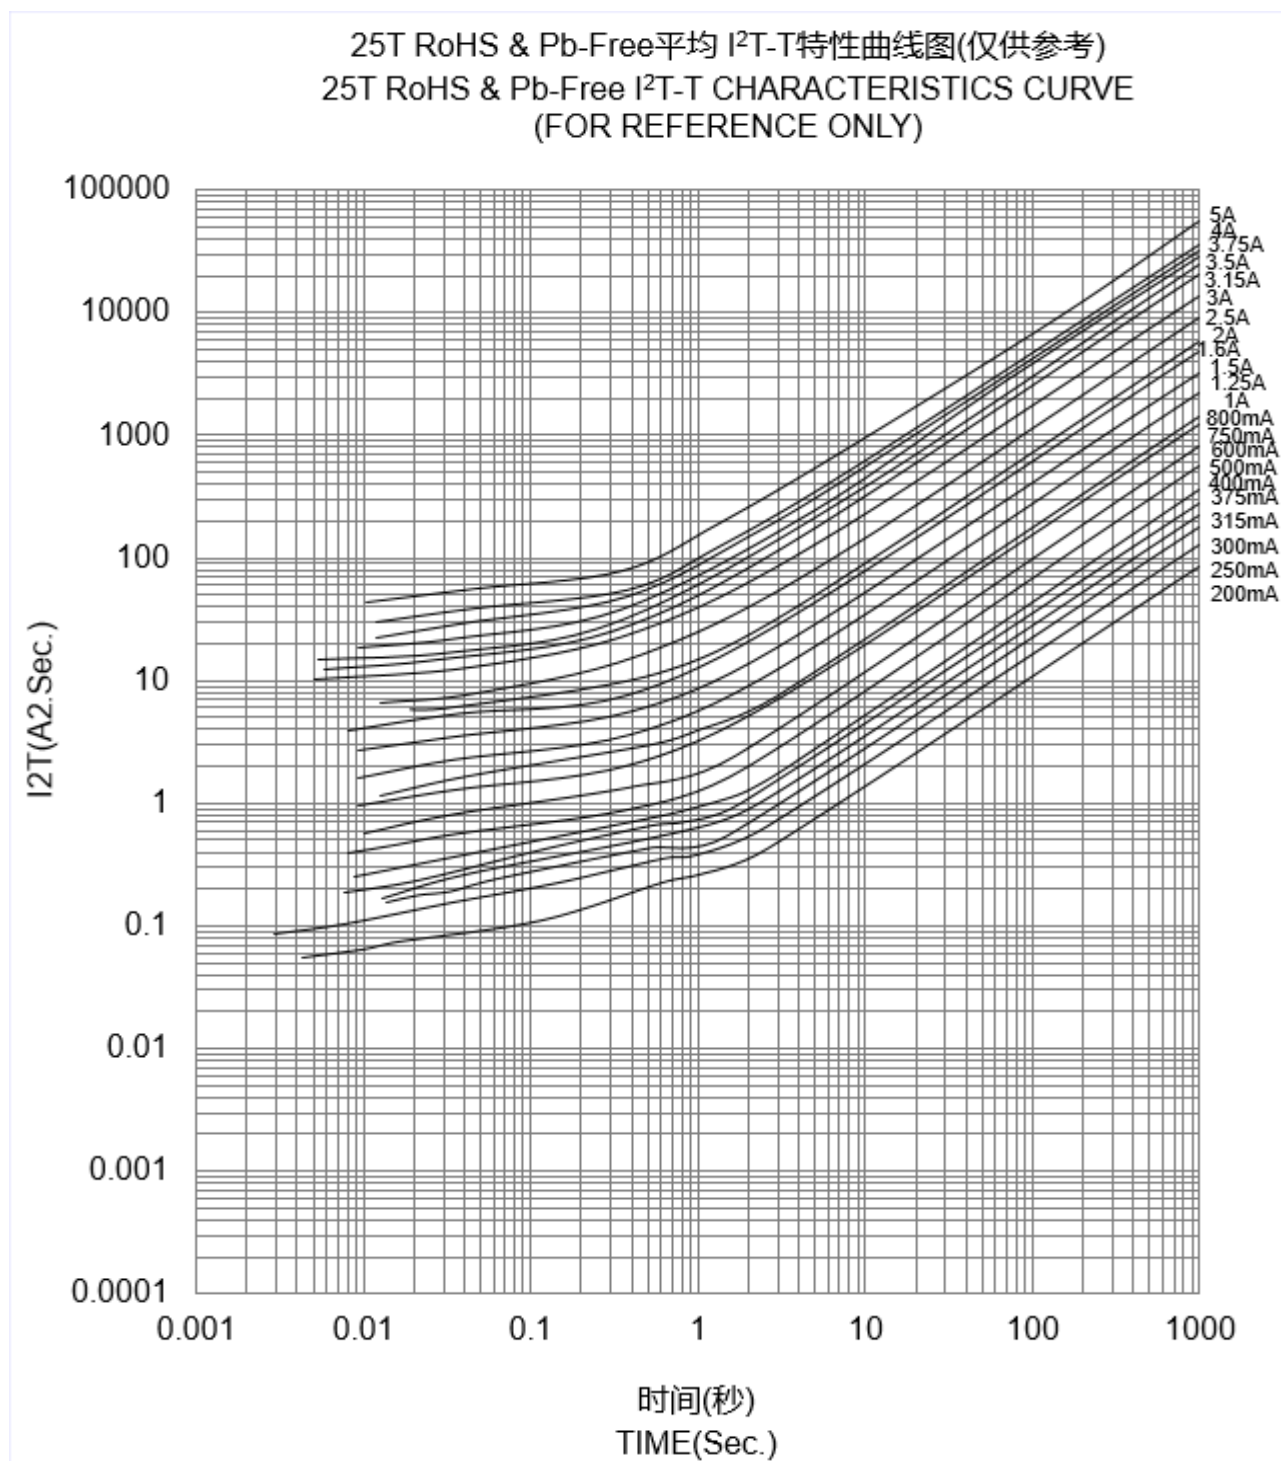

6. 产品标志 MARKINGS

6.1 保险丝管表面印有相应的标志，标志应易于看清。

The relevant markings shall be marked on the ceramic tube of the fuse and shall be easily visible.

6.2 每个保险丝应标有下列标记：

The markings for every fuse shall be prescribed as below according to the types:

1) 额定电流 Rated Current


注：商标、额定电压、安全认证标志和型号名称在包装标签上标识。

Note: The Trademark, Rated Voltage, Safety Approval Logo and Type should be marked on the packing label.

7. 包装要求 PACKING DETAILS

参照产品包装编带标准 EIA-481-D。Punched Carrier taping and Reel packing according to EIA-481-D



7.1 编带尺寸 TAPE DIMENSIONS:

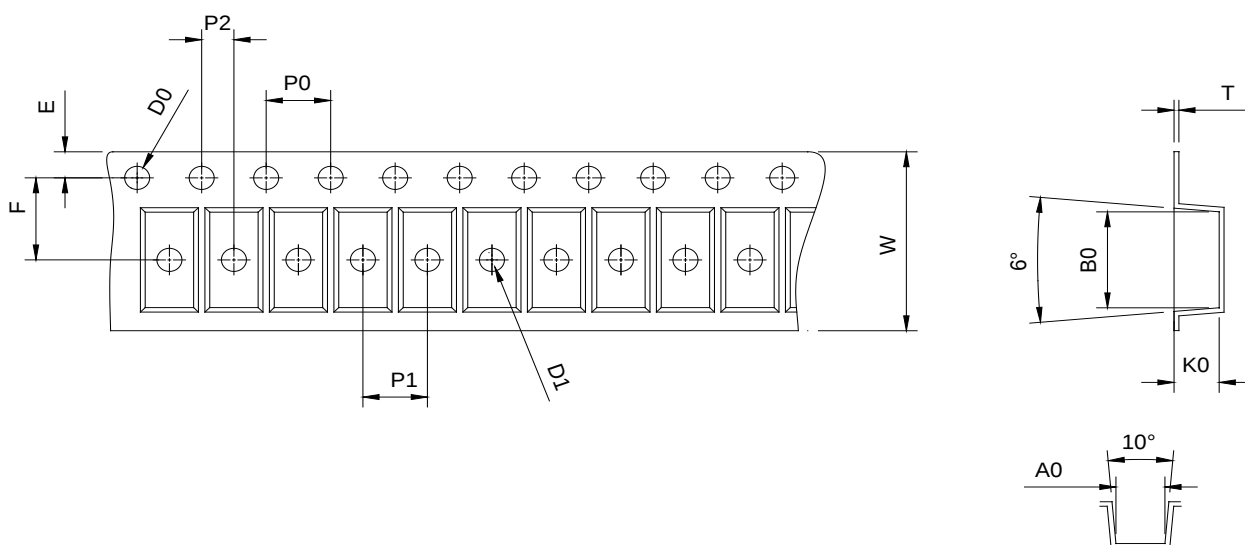

ITEM	A0	B0	K0	W	E	F	P0	P1	P2	D0	D1	T
Dimensions	2.80	6.45	2.75	12.00	1.75	5.50	4.0	4.0	2.0	1.50	1.50	0.25
Tolerance	±0.10	±0.10	±0.10	±0.15	±0.10	±0.05	±0.10	±0.10	±0.05	±0.10	±0.10	±0.05

7.2 送料间距 FEEDING PITCH: 4mm

7.3 卷盘尺寸 REEL DIMENSIONS:

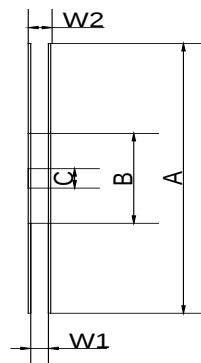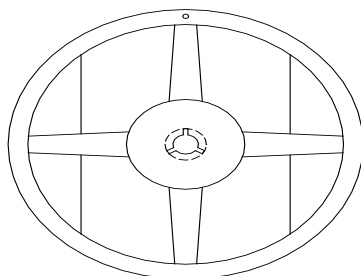

ITEM	A	B	C	W ₁	W ₂
Dimensions	178±2.0	60 Min.	13+0.5/-0.2	13+1.0/-0.0	15.4±1.0

7.4 每卷 1,000 只保险丝 1,000EA fuses / reel

7.5 外盒尺寸 BOX DIMENSIONS: 长 L*宽 W*高 H=183±3*183±3*19±3mm

8. 环境性能 ENVIRONMENTAL PERFORMANCES

8.1 工作温度 OPERATING TEMPERATURE : -40℃~+125℃.

8.2 储存温度 STORAGING TEMPERATURE: -40℃~+85℃.

9. 信赖性试验 RELIABILITY TEST

项目 Item	试验条件 Test Conditions
冲击 Shock	军用标准-202, 方法 213, 测试条件 I, (峰值加速度 100G's, 持续 6ms) MIL-STD-202, Method 213, Test Condition I (100G's peak for 6ms)
振动 Vibration	军用标准-202, 方法 201, (10-55-10 赫兹/分钟, 总振幅 0.06 英寸, X, Y, Z 各方向各 2 小时, 共 6 小时) MIL-STD-202, Method 201 (10-55-10Hz / minute, 0.06 inches total excursion in each of 3 mutually perpendicular directions for two hours, total six hours)
盐雾试验 Salt Atmosphere	军用标准-202, 方法 101, 测试条件 B (48 小时) MIL-STD -202, Method 101, Test Condition B (48 hours)
热冲击 Thermal Shock	军用标准-202, 方法 107, 测试条件 B (-65℃ to 125℃) MIL-STD-202, Method 107, Test Condition B (-65℃ to 125℃)
耐湿性 Moisture Resistance	军用标准-202, 方法 106, (湿度: 90%- 98%R.H., 温度: 65℃) MIL-STD-202, Method 106 (90% to 98%R.H. at 65℃)
可焊性 Solderability	军用标准-202, 方法 208 MIL-STD-202, Method 208
耐焊接热性 Resistance to Soldering Heat	军用标准-202, 方法 210, 测试条件 K, (红外线回流焊: 240℃最大, 最大 10 秒, 超过 95%被焊锡覆盖) MIL-STD-202, Method 210, Test Condition K (Infrared Reflow soldering max. at 240℃ max. for 10s, more than 95% coverage by solder)
绝缘电阻 Insulation Resistance	军用标准-202, 方法 302, 测试条件 B, (熔断后, 10,000 Ω, 最小) MIL-STD-202, Method 302, Test Condition B (after opening, 10,000 Ω minimum)