



SAMXON BRAND ALUMINUM ELECTROLYTIC CAPACITORS

# PRODUCT SPECIFICATION

## 規格書

CUSTOMER :  
(客戶) :

DATE :  
(日期) : 2022-12-14

CATEGORY (品名) : ALUMINUM ELECTROLYTIC  
CAPACITORS  
DESCRIPTION (型号) : RT 500V82μF(φ18X30)  
VERSION (版本) : 01  
Customer P/N :  
SUPPLIER :

SUPPLIER	
PREPARED ( 拟定 )	CHECKED ( 审核 )
梁文文	付婷婷

CUSTOMER	
APPROVAL ( 批准 )	SIGNATURE ( 签名 )

<b>MAN YUE ELECTRONICS COMPANY LIMITED</b>	<b>ELECTROLYTIC CAPACITOR SPECIFICATION RT SERIES</b>	<b>SAMXON</b>
--	---	---------------



SPECIFICATION RT SERIES					ALTERNATION HISTORY RECORDS		
Rev.	Date	Mark	Page	Contents	Purpose	Drafter	Approver

Version	01	Page	1
---------	----	------	---

**Table 1 Product Dimensions and Characteristics**

**Unit: mm**

**Unit: mm**

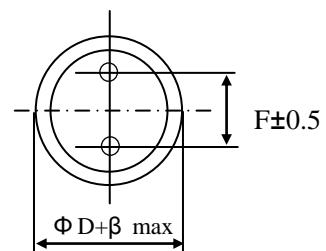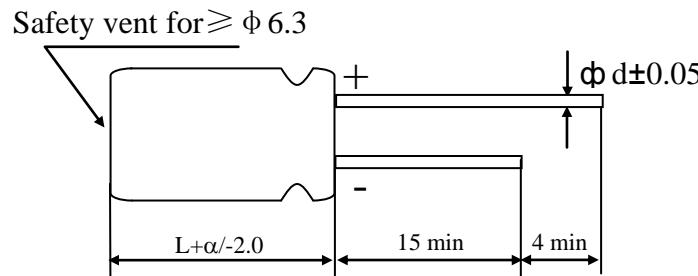

α	L < 20 : α = 1.5; L ≥ 20 : α = 2.0
β	Φ D < 20 : β = 0.5; Φ D ≥ 20 : β = 1.0

\* If it is flat rubber, there is no bulge from the flat rubber surface.

Table 1:

No.	SAMXON Part No.	WV (Vdc)	Cap. (μF)	Cap. tolerance	Temp. range(°C)	tan δ (120Hz, 20°C)	Leakage Current (μA,2min)	Max Ripple Current at 105°C 100 kHz (mA rms)	Load Lifetime (Hrs)	Dimension (mm)			Sleeve
										D × L	F	Φd	
1	ERT826M2HL30RRS9A1R	500	82	-20% ~ +20%	-25 ~ 105	0.24	845	1026	5000	18 × 30	7.5	0.8	PET

## C O N T E N T S

	Sheet
1. Application	4
2. Part Number System	4
3. Construction	5
4. Characteristics	5~10
4.1 Rated voltage & Surge voltage	
4.2 Capacitance (Tolerance)	
4.3 Leakage current	
4.4 $\tan \delta$	
4.5 Terminal strength	
4.6 Temperature characteristic	
4.7 Load life test	
4.8 Shelf life test	
4.9 Surge test	
4.10 Vibration	
4.11 Solderability test	
4.12 Resistance to solder heat	
4.13 Change of temperature	
4.14 Damp heat test	
4.15 Vent test	
4.16 Maximum permissible (ripple current)	
5. List of “Environment-related Substances to be Controlled (‘Controlled Substances’)”	11
Attachment: Application Guidelines	12~15

## 1. Application


This specification applies to polar Aluminum electrolytic capacitor (foil type) used in electronic equipment.  
Designed capacitor's quality meets IEC60384.

## 2. Part Number System

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
<b>E G S</b>	<b>1 0 5</b>	<b>M</b>				<b>1 H</b>			<b>D 1 1</b>			<b>T C</b>	<b>S A</b>	<b>P</b>		
SERIES	CAPACITANCE	TOLERANCE				VOLTAGE			CASE SIZE			TYPE	SAMXON PRODUCT LINE	SLEEVE MATERIAL		
Series	Cap (uF)	Code	Tol. (%)	Code		Vol. (V.V)	Code		Case Size			Feature	Code	SAMXON Product Line		
EKF	0.1	104	±5	J		2	0D		Diameter(Φ)	Code		Radial bulk	RR			
EKS	0.22	224	±10	K		2.5	0E			3	B					
EGS	0.33	334	±15	L		4	0G			3.5	1					
EKM	0.47	474	±20	M		6.3	0J			4	C					
EKG			±30	N		8	0K			5	D					
EOM			-40	0	W	10	1A			6.3	E					
EGF			-20	0	A	12.5	1B			8	F					
ESF			-20	+10	C	16	1C			10	G					
EGT			-20	+40	X	20	1D			12.5	I					
EGK			-20	+50	S	25	1E			13	J					
ESK	1	105	-10	+20	V	30	1I			13.5	V					
ESH	2.2	225	-10	0	B	32	13			14	4					
ESK	3.3	335	-10	+10		35	1V			14.5	A					
ERS	4.7	475	-10	+40		40	1G			16	K					
EGY	10	106	-10	+50		42	1M			16.5	7					
ERF	22	226	-10	+60		50	1H			18	L					
ERR	33	336	-10	0		57	1L			18.5	8					
ERT	47	476	-10	+20		63	1J			20	M					
ERE	100	107	-10	+30	Q	71	1S			22	N					
ERD	220	227	-10	+50		75	1T			25	O					
ERH	330	337	-10	+70		80	1K			30	P					
EBD	470	477	-10	+50		85	1R			34	W					
ERA	2200	228	-5	+15		90	19			35	Q					
ERB	22000	229	-5	+20		100	2A			40	R					
ERC	33000	339	0	+20		120	2O			42	4					
EFA	47000	479	0	+30		125	2B			45	6					
ENP	330000	33T	0	+50		150	2Z			51	5					
ENH	470000	479	0	+50		160	2C			63.5	T					
ERW	220000	228	-5	+15		180	2P			76	U					
ERY	3300000	33T	-5	+20		200	2D			80	8					
ELP	4700000	479	-5	+30		215	22			90	X					
EAP	2200000	227	-10	+50		220	2N			100	Z					
EQP	33000000	33T	-10	+50		230	23			Len. (mm)	Code					
EDP	47000000	479	-10	+50		250	2E			4.5	45					
ETP	22000000	229	-10	+50		275	2T			5	05					
EHP	330000000	33T	-10	+50		300	2I			5.4	54					
EUP	470000000	479	-10	+50		310	2R			7	07					
EKP	220000000	229	-5	+15		315	2F			7.7	77					
EPK	3300000000	33T	0	+20		330	2U			10.2	T2					
EEP	4700000000	479	0	+30		350	2V			11	11					
EFP	2200000000	229	0	+50		360	2X			11.5	1A					
ESP	33000000000	33T	0	+50		375	2Q			12	12					
EVP	47000000000	479	0	+50		385	2Y			12.5	1B					
EGP	22000000000	229	0	+50		400	2G			13	13					
EWR	330000000000	33T	0	+50		420	2M			13.5	1C					
EVI	470000000000	479	0	+50		450	2W			20	20					
EWT	220000000000	22T	0	+50		500	2H			25	25					
EWX	3300000000000	33T	0	+50		550	25			29.5	2J					
EWF	4700000000000	479	0	+50		585	2Y			30	30					
EWH	2200000000000	22T	0	+50		600	2G			31.5	3A					
EWL	33000000000000	33T	0	+50		600	2M			35	35					
EWB	47000000000000	479	0	+50		650	2H			35.5	3E					
VS1	220000000000000	22T	0	+50		650	25			50	50					
VT1	330000000000000	33T	0	+50		685	2Y			80	80					
VTD	470000000000000	479	0	+50		700	2G			100	1L					
VTG	2200000000000000	22T	0	+50		700	2M			105	1K					
VZ2	3300000000000000	33T	0	+50		700	2H			110	1M					
VTL	4700000000000000	479	0	+50		700	25			120	1N					
10000000000000000	10M		0	+50		700	2Y			130	1P					
15000000000000000	15M		0	+50		700	2G			140	1Q					
22000000000000000	22M		0	+50		700	2M			150	1R					
33000000000000000	33M		0	+50		700	2H			155	1E					
100000000000000000	10M		0	+50		700	25			160	1S					
150000000000000000	15M		0	+50		700	2Y			165	1F					
220000000000000000	22M		0	+50		700	2G			170	1T					
330000000000000000	33M		0	+50		700	2M			180	1U					
1000000000000000000	10M		0	+50		700	2H			190	1V					
1500000000000000000	15M		0	+50		700	25			200	2L					
2200000000000000000	22M		0	+50		700	2Y			215	2A					
3300000000000000000	33M		0	+50		700	2G			210	2M					
10000000000000000000	10M		0	+50		700	2M			220	2N					
15000000000000000000	15M		0	+50		700	2H			240	2Q					
22000000000000000000	22M		0	+50		700	25			250	2R					
33000000000000000000	33M		0	+50		700	2Y			260	25					
100000000000000000000	10M		0	+50		700	2G			270	2T					

### 3. Construction

Single ended type to be produced to fix the terminals to anode and cathode foil, and wind together with paper, and then wound element to be impregnated with electrolyte will be enclosed in an aluminum case. Finally sealed up tightly with end seal rubber, then finished by putting on the vinyl sleeve.

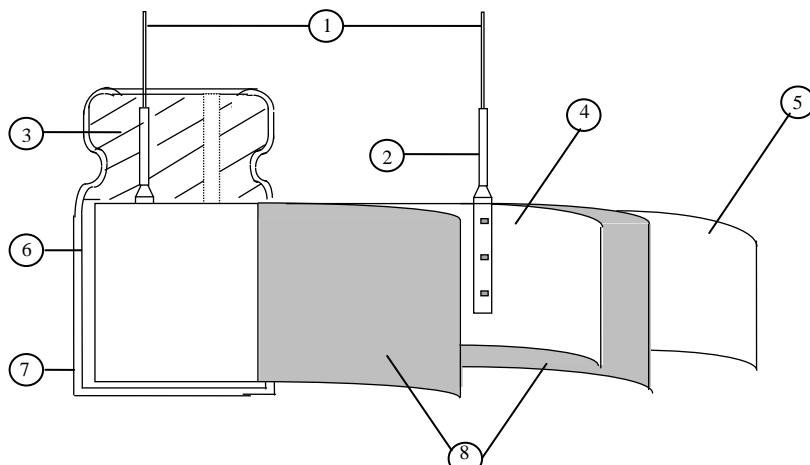

	Component	Material
1	Lead line	Tinned CP wire (Pb Free)
2	Terminal	Aluminum wire
3	Sealing Material	Rubber
4	Al-Foil (+)	Formed aluminum foil
5	Al-Foil (-)	Etched aluminum foil or formed aluminum foil
6	Case	Aluminum case
7	Sleeve	PET
8	Separator	Electrolyte paper

### 4. Characteristics

#### Standard atmospheric conditions

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests are as follows:

Ambient temperature : 15°C to 35°C  
Relative humidity : 45% to 85%  
Air Pressure : 86kPa to 106kPa

If there is any doubt about the results, measurement shall be made within the following conditions:

Ambient temperature : 20°C ± 2°C  
Relative humidity : 60% to 70%  
Air Pressure : 86kPa to 106kPa

#### Operating temperature range

The ambient temperature range at which the capacitor can be operated continuously at rated voltage  
See table 1 temperature range.

As to the detailed information, please refer to table 2.

Table 2

ITEM		PERFORMANCE																												
4.1	Rated voltage (WV) Surge voltage (SV)																													
		<table border="1"> <tr> <td>WV (V.DC)</td><td>160</td><td>200</td><td>220</td><td>250</td><td>350</td><td>400</td><td>420</td><td>450</td><td>500</td></tr> <tr> <td>SV (V.DC)</td><td>200</td><td>250</td><td>270</td><td>300</td><td>400</td><td>450</td><td>470</td><td>500</td><td>550</td></tr> </table>									WV (V.DC)	160	200	220	250	350	400	420	450	500	SV (V.DC)	200	250	270	300	400	450	470	500	550
WV (V.DC)	160	200	220	250	350	400	420	450	500																					
SV (V.DC)	200	250	270	300	400	450	470	500	550																					
4.2	Nominal capacitance (Tolerance)	<p><b>&lt;Condition&gt;</b>            Measuring Frequency : <math>120\text{Hz} \pm 12\text{Hz}</math>            Measuring Voltage : Not more than <math>0.5\text{Vrms}</math>            Measuring Temperature : <math>20 \pm 2^\circ\text{C}</math></p> <p><b>&lt;Criteria&gt;</b>            Shall be within the specified capacitance tolerance.</p>																												
4.3	Leakage current	<p><b>&lt;Condition&gt;</b>            Connecting the capacitor with a protective resistor (<math>1\text{k}\Omega \pm 10\Omega</math>) in series for 2 minutes, and then, measure Leakage Current.</p> <p><b>&lt;Criteria&gt;</b>            Refer to Table 1</p>																												
4.4	$\tan \delta$	<p><b>&lt;Condition&gt;</b>            See 4.2, Norm Capacitance, for measuring frequency, voltage and temperature.</p> <p><b>&lt;Criteria&gt;</b>            Refer to Table 1</p>																												
4.5	Terminal strength	<p><b>&lt;Condition&gt;</b>            Tensile Strength of Terminals            Fixed the capacitor, applied force to the terminal in lead out direction for <math>10 \pm 1</math> seconds.            Bending Strength of Terminals.            Fixed the capacitor, applied force to bent the terminal (1~4 mm from the rubber) for <math>90^\circ</math> within 2~3 seconds, and then bent it for <math>90^\circ</math> to its original position within 2~3 seconds.</p> <table border="1"> <tr> <th>Diameter of lead wire</th><th>Tensile force N (kgf)</th><th>Bending force N (kgf)</th></tr> <tr> <td>0.5mm and less</td><td>5 (0.51)</td><td>2.5 (0.25)</td></tr> <tr> <td>Over 0.5mm to 0.8mm</td><td>10 (1.0)</td><td>5 (0.51)</td></tr> </table> <p><b>&lt;Criteria&gt;</b>            No noticeable changes shall be found, no breakage or looseness at the terminal.</p>										Diameter of lead wire	Tensile force N (kgf)	Bending force N (kgf)	0.5mm and less	5 (0.51)	2.5 (0.25)	Over 0.5mm to 0.8mm	10 (1.0)	5 (0.51)										
Diameter of lead wire	Tensile force N (kgf)	Bending force N (kgf)																												
0.5mm and less	5 (0.51)	2.5 (0.25)																												
Over 0.5mm to 0.8mm	10 (1.0)	5 (0.51)																												

		<Condition>		
		STEP	Testing Temperature(°C)	Time
1	20±2	Time to reach thermal equilibrium		
2	-40(-25) ±3	Time to reach the mal equilibrium		
3	20±2	Time to reach thermal equilibrium		
4	105±2	Time to reach thermal equilibrium		
5	20±2	Time to reach thermal equilibrium		

## &lt;Criteria&gt;

- a. In step 4,  $\tan \delta$  shall be within the limit of Item 4.4. The leakage current measured shall not more than 8 times of its specified value.
- b. In step 5,  $\tan \delta$  shall be within the limit of Item 4.4. The leakage current shall not more than the specified value.
- c. In step 2, At -40°C (-25°C), impedance (z) ratio shall not exceed the value of the following table.

Working Voltage (V)	160	200	250	350	400	450	500
Z-25°C/Z+20°C	3	3	3	5	5	6	6



For capacitance value > 1000  $\mu$  F, Add 0.5 per another 1000  $\mu$  F for Z-25/Z+20°C,  
Add 1.0 per another 1000  $\mu$  F for Z-40°C/Z+20°C.

Capacitance,  $\tan \delta$ , and impedance shall be measured at 120Hz.

		<Condition>
4.7		According to IEC60384-4 No.4.13 methods, The capacitor is stored at a temperature of 105 °C ± 2 with DC bias voltage plus the rated ripple current for Table 1 load life time hours. (The sum of DC and ripple peak voltage shall not exceed the rated working voltage) Then the product should be tested after 16 hours recovering time at atmospheric conditions. The result should meet the following table:
		<Criteria> The characteristic shall meet the following requirements.

Leakage current	Value in 4.3 shall be satisfied
Capacitance Change	Within ±20% of initial value.
$\tan \delta$	Not more than 200% of the specified value.
Appearance	There shall be no leakage of electrolyte.

		<Condition>
4.8		The capacitors are then stored with no voltage applied at a temperature of 105±2°C for 1000+48/0 hours. Following this period the capacitors shall be removed from the test chamber and be allowed to stabilize at room temperature for 4~8 hours. Next they shall be connected to a series limiting resistor(1k±100 $\Omega$ ) with D.C. rated voltage applied for 30min. After which the capacitors shall be discharged, and then, tested the characteristics.

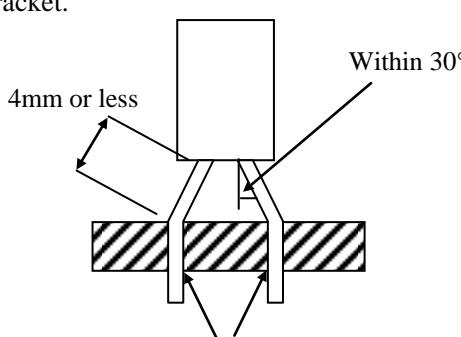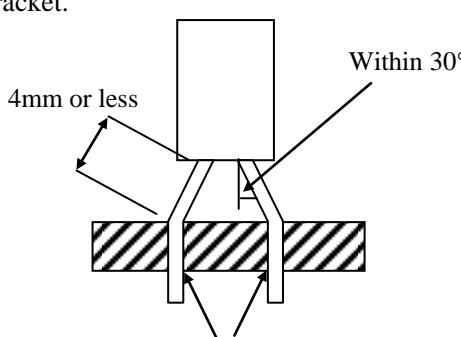4.8	Shelf life test	<p><b>&lt;Criteria&gt;</b> The characteristic shall meet the following requirements.</p> <table border="1"> <tr><td>Leakage current</td><td>Value in 4.3 shall be satisfied</td></tr> <tr><td>Capacitance Change</td><td>Within <math>\pm 20\%</math> of initial value.</td></tr> <tr><td><math>\tan \delta</math></td><td>Not more than 200% of the specified value.</td></tr> <tr><td>Appearance</td><td>There shall be no leakage of electrolyte.</td></tr> </table> <p>Remark: If the capacitors are stored more than 1 year, the leakage current may increase. Please apply voltage through about 1 k<math>\Omega</math> resistor, if necessary.</p>	Leakage current	Value in 4.3 shall be satisfied	Capacitance Change	Within $\pm 20\%$ of initial value.	$\tan \delta$	Not more than 200% of the specified value.	Appearance	There shall be no leakage of electrolyte.
Leakage current	Value in 4.3 shall be satisfied									
Capacitance Change	Within $\pm 20\%$ of initial value.									
$\tan \delta$	Not more than 200% of the specified value.									
Appearance	There shall be no leakage of electrolyte.									
<p><b>&lt;Condition&gt;</b> Applied a surge voltage to the capacitor connected with a <math>(100 \pm 50)/C_R</math> (k<math>\Omega</math>) resistor. The capacitor shall be submitted to 1000 cycles, each consisting of charge of <math>30 \pm 5</math> s, followed discharge of 5 min 30s. The test temperature shall be 15~35°C. <math>C_R</math> :Nominal Capacitance ( <math>\mu</math> F)</p> <p><b>&lt;Criteria&gt;</b></p> <table border="1"> <tr><td>Leakage current</td><td>Not more than the specified value.</td></tr> <tr><td>Capacitance Change</td><td>Within <math>\pm 15\%</math> of initial value.</td></tr> <tr><td><math>\tan \delta</math></td><td>Not more than the specified value.</td></tr> <tr><td>Appearance</td><td>There shall be no leakage of electrolyte.</td></tr> </table> <p>Attention: This test simulates over voltage at abnormal situation only. It is not applicable to such over voltage as often applied.</p>	Leakage current	Not more than the specified value.	Capacitance Change	Within $\pm 15\%$ of initial value.	$\tan \delta$	Not more than the specified value.	Appearance	There shall be no leakage of electrolyte.		
Leakage current	Not more than the specified value.									
Capacitance Change	Within $\pm 15\%$ of initial value.									
$\tan \delta$	Not more than the specified value.									
Appearance	There shall be no leakage of electrolyte.									
4.9	Surge test	<p><b>&lt;Condition&gt;</b> The following conditions shall be applied for 2 hours in each 3 mutually perpendicular directions.</p> <p>Vibration frequency range : 10Hz ~ 55Hz Peak to peak amplitude : 1.5mm Sweep rate : 10Hz ~ 55Hz ~ 10Hz in about 1 minute</p> <p>Mounting method: The capacitor with diameter greater than 12.5mm or longer than 25mm must be fixed in place with a bracket.</p>								
		 <p><b>&lt;Criteria&gt;</b> After the test, the following items shall be tested:</p> <table border="1"> <tr><td>Inner construction</td><td>No intermittent contacts, open or short circuiting. No damage of tab terminals or electrodes.</td></tr> <tr><td>Appearance</td><td>No mechanical damage in terminal. No leakage of electrolyte or swelling of the case. The markings shall be legible.</td></tr> </table>	Inner construction	No intermittent contacts, open or short circuiting. No damage of tab terminals or electrodes.	Appearance	No mechanical damage in terminal. No leakage of electrolyte or swelling of the case. The markings shall be legible.				
Inner construction	No intermittent contacts, open or short circuiting. No damage of tab terminals or electrodes.									
Appearance	No mechanical damage in terminal. No leakage of electrolyte or swelling of the case. The markings shall be legible.									
4.10	Vibration test	<p><b>&lt;Condition&gt;</b> The following conditions shall be applied for 2 hours in each 3 mutually perpendicular directions.</p> <p>Vibration frequency range : 10Hz ~ 55Hz Peak to peak amplitude : 1.5mm Sweep rate : 10Hz ~ 55Hz ~ 10Hz in about 1 minute</p> <p>Mounting method: The capacitor with diameter greater than 12.5mm or longer than 25mm must be fixed in place with a bracket.</p>								
		 <p><b>&lt;Criteria&gt;</b> After the test, the following items shall be tested:</p> <table border="1"> <tr><td>Inner construction</td><td>No intermittent contacts, open or short circuiting. No damage of tab terminals or electrodes.</td></tr> <tr><td>Appearance</td><td>No mechanical damage in terminal. No leakage of electrolyte or swelling of the case. The markings shall be legible.</td></tr> </table>	Inner construction	No intermittent contacts, open or short circuiting. No damage of tab terminals or electrodes.	Appearance	No mechanical damage in terminal. No leakage of electrolyte or swelling of the case. The markings shall be legible.				
Inner construction	No intermittent contacts, open or short circuiting. No damage of tab terminals or electrodes.									
Appearance	No mechanical damage in terminal. No leakage of electrolyte or swelling of the case. The markings shall be legible.									

4.11	Solderability test	<p><b>&lt;Condition&gt;</b>            The capacitor shall be tested under the following conditions: Sn-Cu solder            Soldering temperature : <math>250 \pm 3^\circ\text{C}</math>            Dipping depth : 2mm            Dipping speed : <math>25 \pm 2.5 \text{mm/s}</math>            Dipping time : <math>3 \pm 0.5\text{s}</math></p> <p><b>&lt;Criteria&gt;</b></p> <table border="1" data-bbox="509 557 1356 624"> <tr> <td data-bbox="509 557 901 624">Coating quality</td><td data-bbox="901 557 1356 624">A minimum of 95% of the surface being immersed</td></tr> </table>	Coating quality	A minimum of 95% of the surface being immersed														
Coating quality	A minimum of 95% of the surface being immersed																	
4.12	Resistance to solder heat test	<p><b>&lt;Condition&gt;</b>            Terminals of the capacitor shall be immersed into solder bath at <math>260 \pm 5^\circ\text{C}</math> for <math>10 \pm 1</math> seconds or <math>400 \pm 10^\circ\text{C}</math> for <math>3 \pm 1</math> seconds to 1.5~2.0mm from the body of capacitor .            Then the capacitor shall be left under the normal temperature and normal humidity for 1~2 hours before measurement.</p> <p><b>&lt;Criteria&gt;</b></p> <table border="1" data-bbox="509 900 1287 1035"> <tr> <td data-bbox="509 900 806 938">Leakage current</td><td data-bbox="806 900 1287 938">Not more than the specified value.</td></tr> <tr> <td data-bbox="509 938 806 977">Capacitance Change</td><td data-bbox="806 938 1287 977">Within <math>\pm 10\%</math> of initial value.</td></tr> <tr> <td data-bbox="509 977 806 1015">tan <math>\delta</math></td><td data-bbox="806 977 1287 1015">Not more than the specified value.</td></tr> <tr> <td data-bbox="509 1015 806 1035">Appearance</td><td data-bbox="806 1015 1287 1035">There shall be no leakage of electrolyte.</td></tr> </table>	Leakage current	Not more than the specified value.	Capacitance Change	Within $\pm 10\%$ of initial value.	tan $\delta$	Not more than the specified value.	Appearance	There shall be no leakage of electrolyte.								
Leakage current	Not more than the specified value.																	
Capacitance Change	Within $\pm 10\%$ of initial value.																	
tan $\delta$	Not more than the specified value.																	
Appearance	There shall be no leakage of electrolyte.																	
4.13	Change of temperature test	<p><b>&lt;Condition&gt;</b>            Temperature Cycle: According to IEC60384-4No.4.7methods, capacitor shall be placed in an oven, the condition according as below:</p> <table border="1" data-bbox="509 1170 1260 1379"> <thead> <tr> <th data-bbox="509 1170 970 1208">Temperature</th><th data-bbox="970 1170 1260 1208">Time</th></tr> </thead> <tbody> <tr> <td data-bbox="509 1208 970 1246">(1)+20°C</td><td data-bbox="970 1208 1260 1246"><math>\leq 3</math> Minutes</td></tr> <tr> <td data-bbox="509 1246 970 1284">(2)Rated low temperature (-40°C) (-25°C)</td><td data-bbox="970 1246 1260 1284">30 <math>\pm 2</math> Minutes</td></tr> <tr> <td data-bbox="509 1284 970 1322">(3)Rated high temperature (+105°C)</td><td data-bbox="970 1284 1260 1322">30 <math>\pm 2</math> Minutes</td></tr> <tr> <td data-bbox="509 1322 970 1361">(1) to (3)=1 cycle, total 5 cycle</td><td data-bbox="970 1322 1260 1361"></td></tr> </tbody> </table> <p><b>&lt;Criteria&gt;</b>            The characteristic shall meet the following requirement</p> <table border="1" data-bbox="509 1446 1287 1558"> <tr> <td data-bbox="509 1446 806 1484">Leakage current</td><td data-bbox="806 1446 1287 1484">Not more than the specified value.</td></tr> <tr> <td data-bbox="509 1484 806 1522">tan <math>\delta</math></td><td data-bbox="806 1484 1287 1522">Not more than the specified value.</td></tr> <tr> <td data-bbox="509 1522 806 1558">Appearance</td><td data-bbox="806 1522 1287 1558">There shall be no leakage of electrolyte.</td></tr> </table>	Temperature	Time	(1)+20°C	$\leq 3$ Minutes	(2)Rated low temperature (-40°C) (-25°C)	30 $\pm 2$ Minutes	(3)Rated high temperature (+105°C)	30 $\pm 2$ Minutes	(1) to (3)=1 cycle, total 5 cycle		Leakage current	Not more than the specified value.	tan $\delta$	Not more than the specified value.	Appearance	There shall be no leakage of electrolyte.
Temperature	Time																	
(1)+20°C	$\leq 3$ Minutes																	
(2)Rated low temperature (-40°C) (-25°C)	30 $\pm 2$ Minutes																	
(3)Rated high temperature (+105°C)	30 $\pm 2$ Minutes																	
(1) to (3)=1 cycle, total 5 cycle																		
Leakage current	Not more than the specified value.																	
tan $\delta$	Not more than the specified value.																	
Appearance	There shall be no leakage of electrolyte.																	
4.14	Damp heat test	<p><b>&lt;Condition&gt;</b>            Humidity Test:            According to IEC60384-4No.4.12methods, capacitor shall be exposed for <math>500 \pm 8</math> hours in an atmosphere of 90~95% R H .at <math>40 \pm 2^\circ\text{C}</math>, the characteristic change shall meet the following requirement.</p> <p><b>&lt;Criteria&gt;</b></p> <table border="1" data-bbox="493 1805 1276 1963"> <tr> <td data-bbox="493 1805 759 1843">Leakage current</td><td data-bbox="759 1805 1276 1843">Not more than the specified value.</td></tr> <tr> <td data-bbox="493 1843 759 1882">Capacitance Change</td><td data-bbox="759 1843 1276 1882">Within <math>\pm 20\%</math> of initial value.</td></tr> <tr> <td data-bbox="493 1882 759 1920">tan <math>\delta</math></td><td data-bbox="759 1882 1276 1920">Not more than 120% of the specified value.</td></tr> <tr> <td data-bbox="493 1920 759 1963">Appearance</td><td data-bbox="759 1920 1276 1963">There shall be no leakage of electrolyte.</td></tr> </table>	Leakage current	Not more than the specified value.	Capacitance Change	Within $\pm 20\%$ of initial value.	tan $\delta$	Not more than 120% of the specified value.	Appearance	There shall be no leakage of electrolyte.								
Leakage current	Not more than the specified value.																	
Capacitance Change	Within $\pm 20\%$ of initial value.																	
tan $\delta$	Not more than 120% of the specified value.																	
Appearance	There shall be no leakage of electrolyte.																	

4.15	Vent test	<b>&lt;Condition&gt;</b> The following test only apply to those products with vent products at diameter $\geq \emptyset 6.3$ with vent. D.C. test The capacitor is connected with its polarity reversed to a DC power source. Then a current selected from below table is applied. <b>&lt;Table 3&gt;</b> <table border="1"><thead><tr><th>Diameter (mm)</th><th>DC Current (A)</th></tr></thead><tbody><tr><td>22.4 or less</td><td>1</td></tr><tr><td>Over 22.4</td><td>10</td></tr></tbody></table>	Diameter (mm)	DC Current (A)	22.4 or less	1	Over 22.4	10
Diameter (mm)	DC Current (A)							
22.4 or less	1							
Over 22.4	10							
<b>&lt;Criteria&gt;</b> The vent shall operate with no dangerous conditions such as flames or dispersion of pieces of the capacitor and/or case.								

4.16	Maximum permissible (ripple current)	<b>&lt;Condition&gt;</b> The maximum permissible ripple current is the maximum A.C current at 120Hz and can be applied at maximum operating temperature Table-1 The combined value of D.C voltage and the peak A.C voltage shall not exceed the rated voltage and shall not reverse voltage.																	
		<b>Frequency Multipliers:</b> <table border="1"><thead><tr><th rowspan="2">Cap. ( <math>\mu</math> F)</th><th rowspan="2">Freq. (Hz)</th><th>120</th><th>1k</th><th>10k</th><th>100k</th></tr><tr><th>6.8~180</th><th>0.40</th><th>0.75</th><th>0.90</th><th>1.00</th></tr></thead></table> <b>Temperature Coefficient:</b> <table border="1"><thead><tr><th>Temperature ( <math>^{\circ}</math>C)</th><th><math>\leq 85</math></th><th>95</th><th>105</th></tr></thead><tbody><tr><th>Factor</th><td>1.73</td><td>1.41</td><td>1.00</td></tr></tbody></table>	Cap. ( $\mu$ F)	Freq. (Hz)	120	1k	10k	100k	6.8~180	0.40	0.75	0.90	1.00	Temperature ( $^{\circ}$ C)	$\leq 85$	95	105	Factor	1.73
Cap. ( $\mu$ F)	Freq. (Hz)	120			1k	10k	100k												
		6.8~180	0.40	0.75	0.90	1.00													
Temperature ( $^{\circ}$ C)	$\leq 85$	95	105																
Factor	1.73	1.41	1.00																

**5. It refers to the latest document of “Environment-related Substances standard”(WI-HSPM-QA-072).**

Substances	
Heavy metals	Cadmium and cadmium compounds
	Lead and lead compounds
	Mercury and mercury compounds
	Hexavalent chromium compounds
Chlorinated organic compounds	Polychlorinated biphenyls (PCB)
	Polychlorinated naphthalenes (PCN)
	Polychlorinated terphenyls (PCT)
	Short-chain chlorinated paraffins(SCCP)
	Other chlorinated organic compounds
Brominated organic compounds	Polybrominated biphenyls (PBB)
	Polybrominated diphenylethers(PBDE) (including decabromodiphenyl ether[DecaBDE])
	Other brominated organic compounds
Tributyltin compounds(TBT)	
Triphenyltin compounds(TPT)	
Asbestos	
Specific azo compounds	
Formaldehyde	
Beryllium oxide	
Beryllium copper	
Specific phthalates (DEHP,DBP,BBP,DINP,DIDP,DNOP,DNHP)	
Hydrofluorocarbon (HFC), Perfluorocarbon (PFC)	
Perfluorooctane sulfonates (PFOS)	
Specific Benzotriazole	

**Attachment: Application Guidelines****1. Circuit Design****1.1 Operating Temperature and Frequency**

Electrolytic capacitor electrical parameters are normally specified at 20°C temperature and 120Hz frequency. These parameters vary with changes in temperature and frequency. Circuit designers should take these changes into consideration.

**(1) Effects of operating temperature on electrical parameters**

- a) At higher temperatures, leakage current and capacitance increase while equivalent series resistance (ESR) decreases.
- b) At lower temperatures, leakage current and capacitance decrease while equivalent series resistance (ESR) increases.

**(2) Effects of frequency on electrical parameters**

- a) At higher frequencies capacitance and impedance decrease while  $\tan\delta$  increases.
- b) At lower frequencies, ripple current generated heat will rise due to an increase in equivalent series resistance (ESR).

**1.2 Operating Temperature and Life Expectancy**

See the file: Life calculation of aluminum electrolytic capacitor

**1.3 Common Application Conditions to Avoid**

The following misapplication load conditions will cause rapid deterioration to capacitor electrical parameters. In addition, rapid heating and gas generation within the capacitor can occur causing the pressure relief vent to operate and resultant leakage of electrolyte. Under Leaking electrolyte is combustible and electrically conductive.

**(1) Reverse Voltage**

DC capacitors have polarity. Verify correct polarity before insertion. For circuits with changing or uncertain polarity, use DC bipolar capacitors. DC bipolar capacitors are not suitable for use in AC circuits.

**(2) Charge / Discharge Applications**

Standard capacitors are not suitable for use in repeating charge / discharge applications. For charge / discharge applications consult us and advise actual conditions.

**(3) Over voltage**

Do not apply voltages exceeding the maximum specified rated voltage. Voltages up to the surge voltage rating are acceptable for short periods of time. Ensure that the sum of the DC voltage and the superimposed AC ripple voltage does not exceed the rated voltage.

**(4) Ripple Current**

Do not apply ripple currents exceeding the maximum specified value. For high ripple current applications, use a capacitor designed for high ripple currents or contact us with your requirements. Ensure that allowable ripple currents superimposed on low DC bias voltages do not cause reverse voltage conditions.

**1.4 Using Two or More Capacitors in Series or Parallel****(1) Capacitors Connected in Parallel**

The circuit resistance can closely approximate the series resistance of the capacitor causing an imbalance of ripple current loads within the capacitors. Careful design of wiring methods can minimize the possibility of excessive ripple currents applied to a capacitor.

**(2) Capacitors Connected in Series**

Normal DC leakage current differences among capacitors can cause voltage imbalances. The use of voltage divider shunt resistors with consideration to leakage current can prevent capacitor voltage imbalances.

**1.5 Capacitor Mounting Considerations****(1) Double Sided Circuit Boards**

Avoid wiring pattern runs, which pass between the mounted capacitor and the circuit board.

When dipping into a solder bath, excess solder may collect under the capacitor by capillary action and short circuit the anode and cathode terminals.

**(2) Circuit Board Hole Positioning**

The vinyl sleeve of the capacitor can be damaged if solder passes through a lead hole for subsequently processed parts. Special care when locating hole positions in proximity to capacitors is recommended.

**(3) Circuit Board Hole Spacing**

The circuit board holes spacing should match the capacitor lead wire spacing within the specified tolerances. Incorrect spacing can cause excessive lead wire stress during the insertion process. This may result in premature capacitor failure due to short or open circuit, increased leakage current, or electrolyte leakage.

**(4) Clearance for Case Mounted Pressure Relief vents**

Capacitors with case mounted pressure relief vents require sufficient clearance to allow for proper vent operation. The minimum clearances are dependent on capacitor diameters as proper vent operation. The minimum clearances are dependent on capacitor diameters as follows.

$\phi 6.3 \sim \phi 16\text{mm}$ : 2mm minimum,  $\phi 18 \sim \phi 35\text{mm}$ : 3mm minimum,  $\phi 40\text{mm}$  or greater: 5mm minimum.

**(5) Clearance for Seal Mounted Pressure Relief Vents**

A hole in the circuit board directly under the seal vent location is required to allow proper release of pressure.

## (6) Wiring Near the Pressure Relief Vent

Avoid locating high voltage or high current wiring or circuit board paths above the pressure relief vent. Flammable, high temperature gas exceeding 100°C may be released which could dissolve the wire insulation and ignite.

## (7) Circuit Board patterns Under the Capacitor

Avoid circuit board runs under the capacitor as electrolyte leakage could cause an electrical short.

## (8) Screw Terminal Capacitor Mounting

Do not orient the capacitor with the screw terminal side of the capacitor facing downwards.

Tighten the terminal and mounting bracket screws within the torque range specified in the specification.

## 1.6 Electrical Isolation of the Capacitor

Completely isolate the capacitor as follows.

(1) Between the cathode and the case (except for axially leaded B types) and between the anode terminal and other circuit paths

(2) Between the extra mounting terminals (on T types) and the anode terminal, cathode terminal, and other circuit paths.

## 1.7 The Product endurance should take the sample as the standard.

## 1.8 If conduct the load or shelf life test, must be collect date code within 6 months products of sampling.

## 1.9 Capacitor Sleeve

The vinyl sleeve or laminate coating is intended for marking and identification purposes and is not meant to electrically insulate the capacitor.

The sleeve may split or crack if immersed into solvents such as toluene or xylene, and then exposed to high temperatures.

## CAUTION!

Always consider safety when designing equipment and circuits. Plan for worst case failure modes such as short circuits and open circuits which could occur during use.

(1) Provide protection circuits and protection devices to allow safe failure modes.

(2) Design redundant or secondary circuits where possible to assure continued operation in case of main circuit failure.

## 2. Capacitor Handling Techniques

## 2.1 Considerations Before Using

(1) Capacitors have a finite life. Do not reuse or recycle capacitors from used equipment.

(2) Transient recovery voltage may be generated in the capacitor due to dielectric absorption. If required, this voltage can be discharged with a resistor with a value of about 1kΩ.

(3) Capacitors stored for long periods of time may exhibit an increase in leakage current. This can be corrected by gradually applying rated voltage in series with a resistor of approximately 1kΩ.

(4) If capacitors are dropped, they can be damaged mechanically or electrically. Avoid using dropped capacitors.

(5) Dented or crushed capacitors should not be used. The seal integrity can be compromised and loss of electrolyte / shortened life can result.

## 2.2 Capacitor Insertion

(1) Verify the correct capacitance and rated voltage of the capacitor.

(2) Verify the correct polarity of the capacitor before inserting.

(3) Verify the correct hole spacing before insertion (land pattern size on chip type) to avoid stress on the terminals.

(4) Ensure that the auto insertion equipment lead clinching operation does not stress the capacitor leads where they enter the seal of the capacitor.

For chip type capacitors, excessive mounting pressure can cause high leakage current, short circuit, or disconnection.

## 2.3 Manual Soldering

(1) Observe temperature and time soldering specifications or do not exceed temperatures of 400 °C for 3 seconds or less.

(2) If lead wires must be formed to meet terminal board hole spacing, avoid stress on the lead wire where it enters the capacitor seal.

(3) If a soldered capacitor must be removed and reinserted, avoid excessive stress to the capacitor leads.

(4) Avoid touching the tip of the soldering iron to the capacitor, to prevent melting of the vinyl sleeve.

## 2.4 Flow Soldering

(1) Do not immerse the capacitor body into the solder bath as excessive internal pressure could result.

(2) Observe proper soldering conditions (temperature, time, etc.) Do not exceed the specified limits.

(3) Do not allow other parts or components to touch the capacitor during soldering.

## 2.5 Other Soldering Considerations

Rapid temperature rises during the preheat operation and resin bonding operation can cause cracking of the capacitor vinyl sleeve.

For heat curing, do not exceed 150°C for a maximum time of 2 minutes.

## 2.6 Capacitor Handling after Solder

- (1). Avoid movement of the capacitor after soldering to prevent excessive stress on the lead wires where they enter the seal.
- (2). Do not use capacitor as a handle when moving the circuit board assembly.
- (3). Avoid striking the capacitor after assembly to prevent failure due to excessive shock.

## 2.7 Circuit Board Cleaning

- (1) Circuit boards can be immersed or ultrasonically cleaned using suitable cleaning solvents for up 5 minutes and up to 60°C maximum temperatures. The boards should be thoroughly rinsed and dried. The use of ozone depleting cleaning agents is not recommended in the interest of protecting the environment.
- (2) Avoid using the following solvent groups unless specifically allowed for in the specification;  
Halogenated cleaning solvents: except for solvent resistant capacitor types, halogenated solvents can permeate the seal and cause internal capacitor corrosion and failure. For solvent resistant capacitors, carefully follow the temperature and time requirements of the specification. 1-1-1 trichloroethane should never be used on any aluminum electrolytic capacitor.  
Alkali solvents : could attack and dissolve the aluminum case.  
Petroleum based solvents: deterioration of the rubber seal could result.  
Xylene : deterioration of the rubber seal could result.  
Acetone : removal of the ink markings on the vinyl sleeve could result.
- (3) A thorough drying after cleaning is required to remove residual cleaning solvents which may be trapped between the capacitor and the circuit board. Avoid drying temperatures, which exceed the maximum rated temperature of the capacitor.
- (4) Monitor the contamination levels of the cleaning solvents during use by electrical conductivity, pH, specific gravity, or water content. Chlorine levels can rise with contamination and adversely affect the performance of the capacitor. Please consult us for additional information about acceptable cleaning solvents or cleaning methods.

## 2.8 Mounting Adhesives and Coating Agents

When using mounting adhesives or coating agents to control humidity, avoid using materials containing halogenated solvents. Also, avoid the use of chloroprene based polymers. After applying adhesives or coatings, dry thoroughly to prevent residual solvents from being trapped between the capacitor and the circuit board.

## 3. Precautions for using capacitors

### 3.1 Environmental Conditions

Capacitors should not be stored or used in the following environments.

- (1) Temperature exposure above the maximum rated or below the minimum rated temperature of the capacitor.
- (2) Direct contact with water, salt water, or oil.
- (3) High humidity conditions where water could condense on the capacitor.
- (4) Exposure to toxic gases such as hydrogen sulfide, sulfuric acid, nitric acid chlorine, or ammonia.
- (5) Exposure to ozone, radiation, or ultraviolet rays.
- (6) Vibration and shock conditions exceeding specified requirements.

### 3.2 Electrical Precautions

- (1) Avoid touching the terminals of the capacitor as possible electric shock could result. The exposed aluminum case is not insulated and could also cause electric shock if touched.
- (2) Avoid short circuit the area between the capacitor terminals with conductive materials including liquids such as acids or alkaline solutions.

## 4. Emergency Procedures

- (1) If the pressure relief vent of the capacitor operates, immediately turn off the equipment and disconnect from the power source. This will minimize additional damage caused by the vaporizing electrolyte.
- (2) Avoid contact with the escaping electrolyte gas which can exceed 100°C temperatures.  
If electrolyte or gas enters the eye, immediately flush the eyes with large amounts of water.  
If electrolyte or gas is ingested by mouth, gargle with water.  
If electrolyte contacts the skin, wash with soap and water.

## 5. Long Term Storage

Leakage current of a capacitor increases with long storage times. The aluminum oxide film deteriorates as a function of temperature and time. If used without reconditioning, an abnormally high current will be required to restore the oxide film. This current surge could cause the circuit or the capacitor to fail. After one year, a capacitor should be reconditioned by applying rated voltage in series with a 1000Ω, current limiting resistor for a time period of 30 minutes. If the expired date of products date code is over eighteen months, the products should be returned to confirmation.

### 5.1 Environmental Conditions

The capacitor shall be not use in the following condition:

- (1) Temperature exposure above the maximum rated or below the minimum rated temperature of the capacitor.
- (2) Direct contact with water, salt water, or oil.
- (3) High humidity conditions where water could condense on the capacitor.
- (4) Exposure to toxic gases such as hydrogen sulfide, sulfuric acid, nitric acid, chlorine, or ammonia.
- (5) Exposure to ozone, radiation, or ultraviolet rays.
- (6) Vibration and shock conditions exceeding specified requirements.

#### **6. Capacitor Disposal**

When disposing of capacitors, use one of the following methods.

Incinerate after crushing the capacitor or puncturing the can wall (to prevent explosion due to internal pressure rise).

Capacitors should be incinerated at high temperatures to prevent the release of toxic gases such as chlorine from the polyvinyl chloride sleeve, etc.

Dispose of as solid waste.

NOTE: Local laws may have specific disposal requirements, which must be followed.