

Ordering Information

P125-11 02 A0 C S 116 A 1

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA9T+30%G. F UL94V-0, 颜色: 黑色.

Housing:PA9T+30%G.F UL94V-0, Color:Black

四方针：黄铜，镍底30u"MIN, 表面镀普金

Contact:Brass, GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current:3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage:AC 500V/Minute.

温度范围: -40°C to $+105^{\circ}\text{C}$

Temperture Range: -40°C to $+105^{\circ}\text{C}$

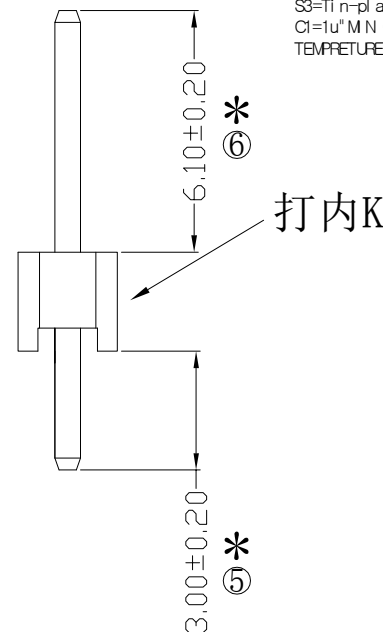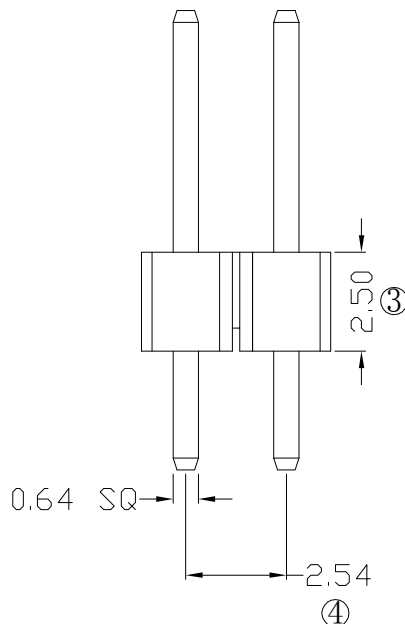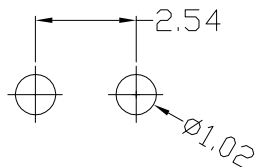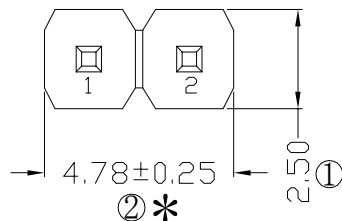

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15: 1.5mm	1-40P	Full of Gold	A: PBT	A: PE Bag	B: Tape & Reel
17: 1.7mm		A1=1u"	B1=1U'	B: PA6T	C: Tube
20: 2.0mm		A2=1.5u"	B2=1.5U'	C: PA6T	D: Tube+CAP
25: 2.54mm		A3=2u"	B3=2U'	D: LCP	E: Tray
		A4=3u"	B4=3U'		
		A5=5u"	B5=5U'		
		A6=10u"	B6=10U'		
		A7=15u"	B7=15U'		
		A8=20u"	B8=20U'		
		A9=30u"	B9=30U'		
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			
		C1=1u" M N GOLD PLATED WITH HIGH TEMPERATURE MATTE TIN			

RoHS
COMPLIANT

注意事项

1. 带*为品质重点检验尺寸

				OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM	www.yxcon.com		
				X.XX	±0.20	SIZE	A4	DESIGN	赵文品 2025.08.22	PART NO	P125-1102A0CS116A1
				X.XXX	±0.10						
				Angle	±3°	SHEET	1/1	CHECK		TITLE	2.54排针 1*2P L=11.6/3.0 180度 打内K PA9T料 镀普金
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	