


Product Summary

- $BVCBO \geq 120V(I_C=0.1mA)$
- $BVCEO \geq 60V(I_C=1mA)$
- $I_C = 1A$

Features

- Consumer electronics
- Voltage switching
- High DC Current Gain

Circuit diagram and pin information

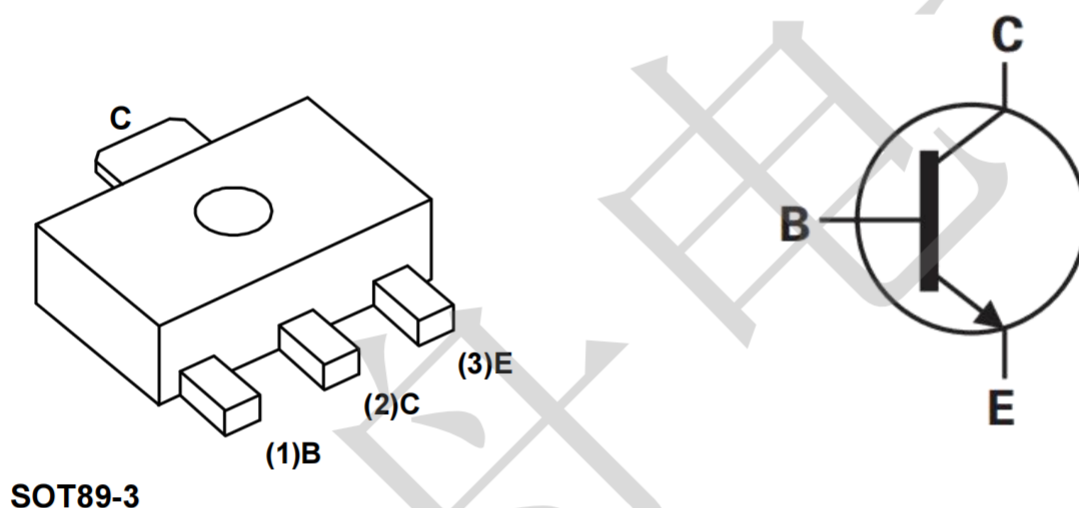

Absolute Maximum Ratings

($T_a=25^{\circ}C$ unless otherwise specified)

PARAMETER	SYMBOL	LIMIT	UNIT
Collector-Base Voltage	V_{CBO}	120	V
Collector-Emitter Voltage	V_{CEO}	60	V
Emitter-Base Voltage	V_{EBO}	6	V
Collector Current (DC)	I_C	1	A
Collector Peak Current (Pulse) Single pulse, $P_w \leq 380\mu s$, Duty $\leq 2\%$	I_{CM}	2	A
Power Total Dissipation @ $T_A=25^{\circ}C$	P_D	500	mW
Maximum Operating Junction Temperature	T_J	+150	$^{\circ}C$
Storage Temperature Range	T_{STG}	-55 to +150	$^{\circ}C$

Electrical Characteristics







(TA=25°C unless otherwise specified)

PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNIT
Static (Note 1)						
Collector-Base Breakdown Voltage	$I_C = 0.1\text{mA}, I_E = 0$	BV_{CBO}	120	--	--	V
Collector-Emitter Breakdown Voltage	$I_C = 1\text{mA}, I_B = 0$	BV_{CEO}	60	--	--	V
Emitter-Base Breakdown Voltage	$I_E = 0.1\text{mA}, I_C = 0$	BV_{EBO}	6	--	--	V
Collector Cutoff Current	$V_{CB} = 60\text{V}, I_E = 0$	I_{CBO}	--	100	--	nA
Emitter Cutoff Current	$V_{EB} = 6\text{V}, I_C = 0$	I_{EBO}	--	100	--	nA
Collector-Emitter Saturation Voltage	$I_C = 1\text{A}, I_B = 0.05\text{A}$	$V_{CE(SAT)}$	--	--	0.3	V
Base-Emitter Saturation Voltage	$I_C = 1\text{A}, I_B = 0.05\text{A}$	$V_{BE(SAT)}$	--	--	1.2	V
DC Current Transfer Ratio	$V_{CE} = 2\text{V}, I_C = 0.1\text{A}$	h_{FE}	135	600	--	
Dynamic (Note 2)						
Transition Frequency	$V_{CE} = 2\text{V}, I_C = 100\text{mA}, f = 100\text{MHz}$	f_T	100	--	--	MHz
Collector Output Capacitance	$V_{CB} = 10\text{V}, I_E = 0\text{A}, f = 10\text{MHz}$	C_{ob}	--	18	--	pF

Note:


1. Pulse test: $\leq 380\mu\text{s}$, duty cycle $\leq 2\%$
2. For DESIGN AID ONLY, not subject to production testing

Typical Performance Characteristics(TA=25°C)

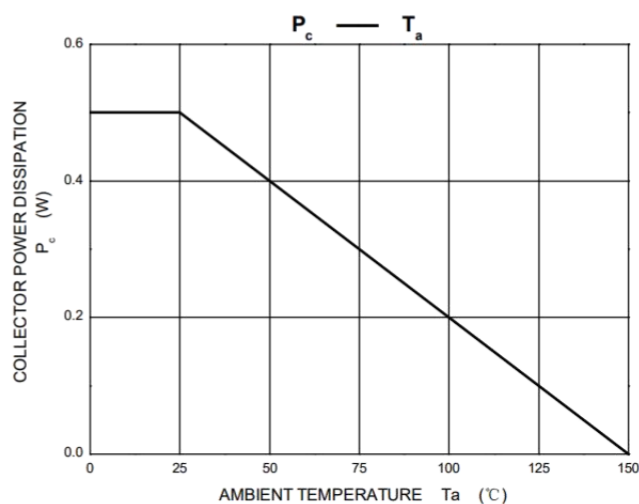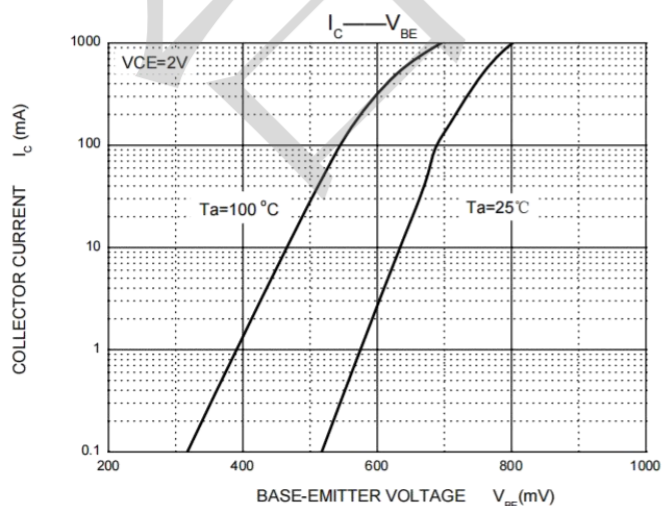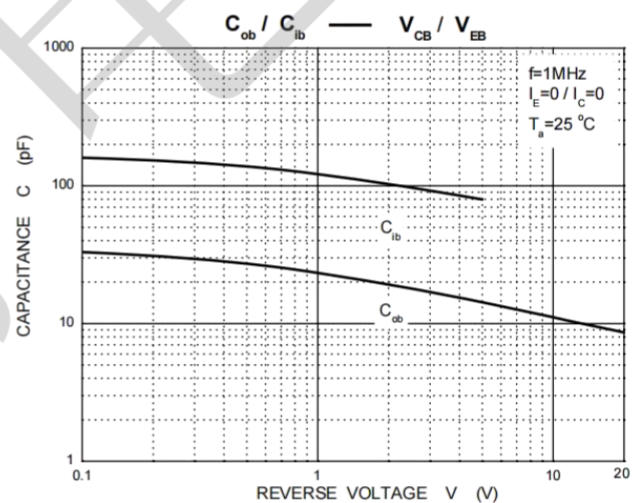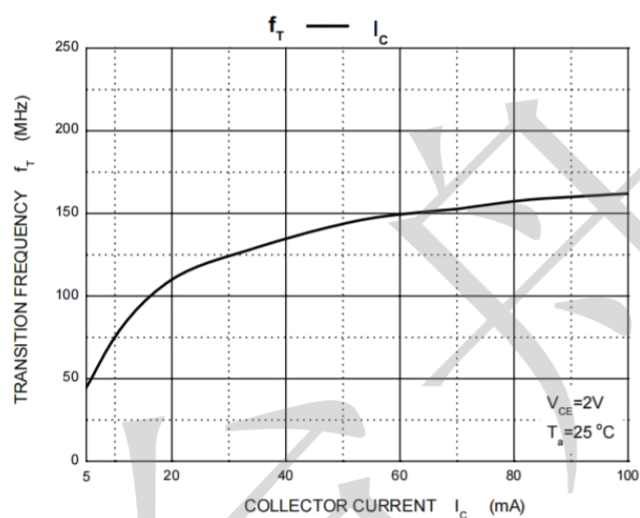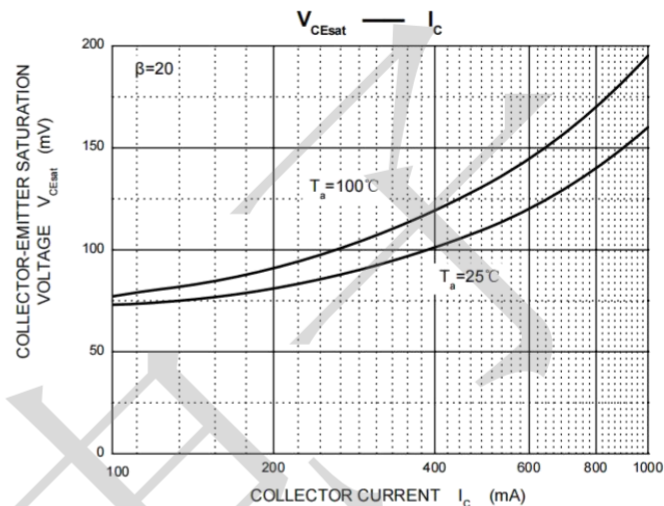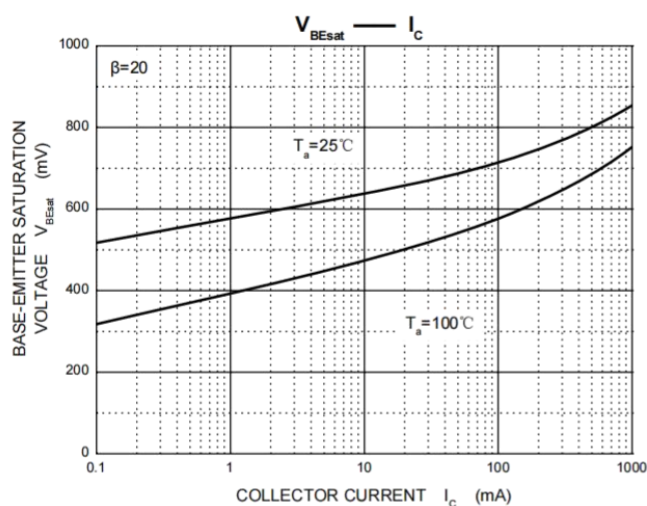

Package Outline Dimensions (unit: mm)

SOT89-3

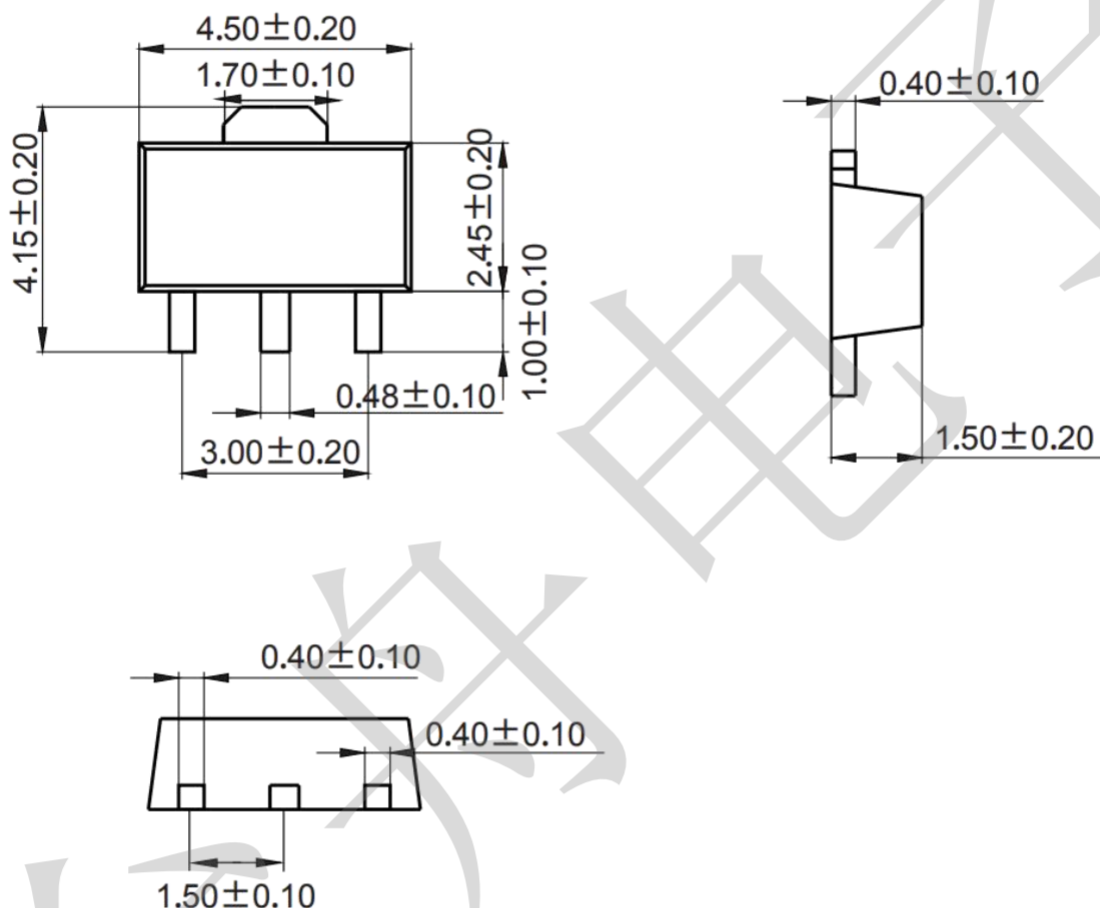

Mounting Pad Layout (unit: mm)

