
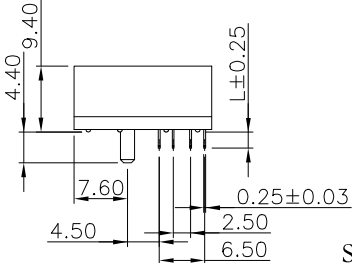
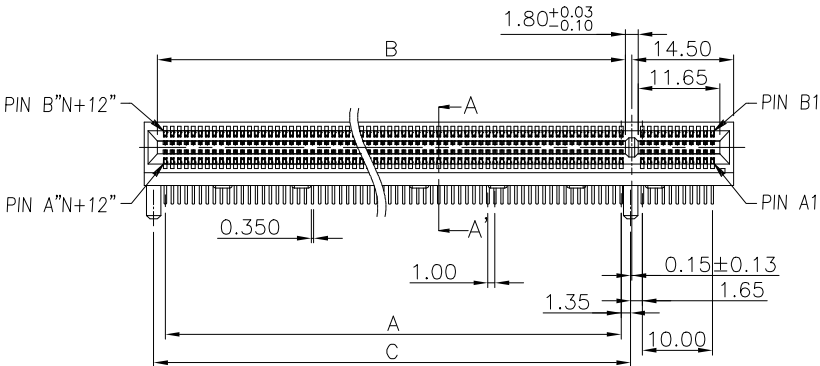
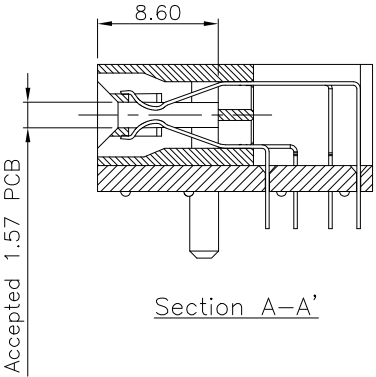


REV.	SPECIFICATION	ECN NO.	APPD.


Material:
Housing: PA9T, UL94V-0, Black.
Contacts: Phosphor Bronze, Gold Plated on Contact Area and 100u" Matte Tin Plated on Solder Tail Area over 50u" Nickel.

Electrical Characteristics:
Current Rating: 1.1A.
Dielectric Withstanding Voltage: AC 500V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 30mΩ max.
Operating Temperature: -40°C~+85°C.

***RoHS Compliant**

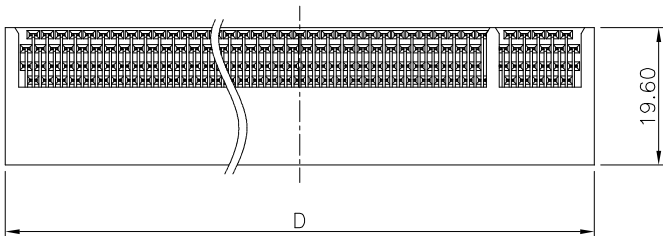



Series 8406-C
Positions xx
C:Selective Gold Plated
00:Gold Flash
15:15u"
30:30u"
R-2.3 A
A:Tray Package
2.3: L for 2.3
Blank: L for 3.1
R:Right Angle

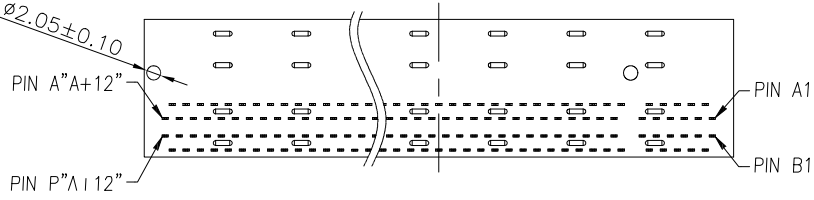


DIMENSIONS				
POSITION	A	B	C	D
36	6	7.65	9.15	25.00
64	20	21.65	23.15	39.00
98	37	38.65	40.15	56.00
164	70	71.65	73.15	89.00

Tolerances	Dwg. No.	S2620230627-01		Title:	8406-C Series PCI Express Pitch 1.0mm Right Angle Type	深圳市格林柏电子技术开发有限公司				
x. = ±0.40 .x = ±0.30 .xx = ±0.20 .xxx = ±0.10	Projection					P/N: 8406-CxxC00R-2.3A				
	Unit	mm	Scale			1:N	SHEET	1/2	Ver.No.	X1
	Drawn By	Martin 06/27'23								
① 716										

REV.	SPECIFICATION	ECN NO.	APPD.

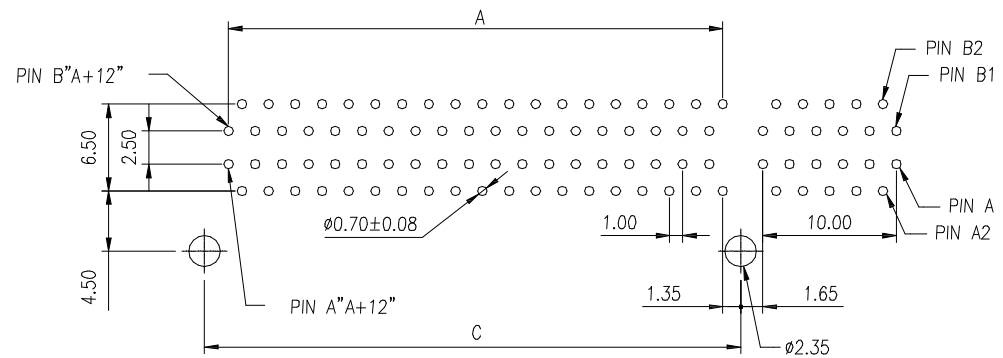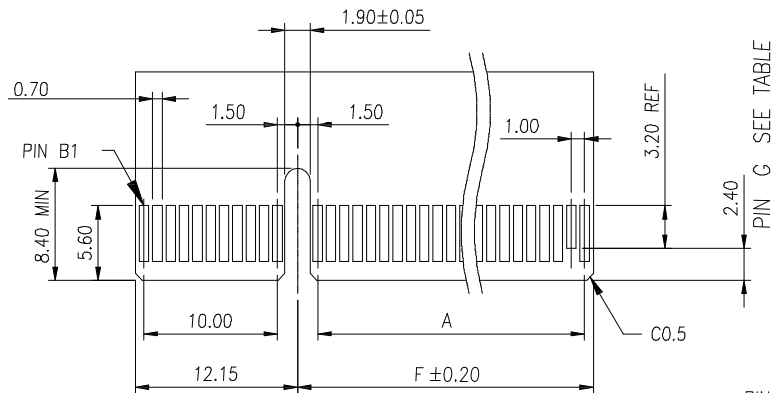

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

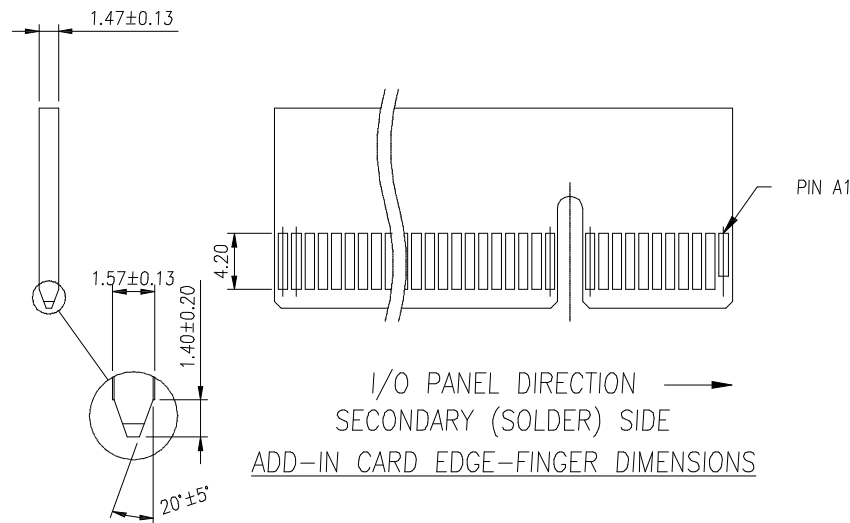

I/O PANEL DIRECTION
SECONDARY (SOLDER) SIDE
ADD-IN CARD EDGE-FINGER DIMENSIONS

DIMENSIONS				
POSITIONS	A	C	F	G
36	6	9.15	8.15	B PIN 17
64	20	23.15	22.15	B PIN 31
98	37	40.15	39.15	B PIN 48
164	70	73.15	72.15	B PIN 81

Tolerances	Dwg. No.	S2620230627-01	Title:		深圳市格林柏电子技术开发有限公司			
x. = ± 0.40	Projection	\oplus \triangleleft	8406-C Series		P/N: 8406-CxxC00R-2.3A			
.x = ± 0.30	Unit	mm	Scale	1:N				
.xx = ± 0.20	Drawn By	Martin 06/27'23	Right Angle Type		SHEET 2/2 Ver.No. X1			
.xxx = ± 0.10			716					