
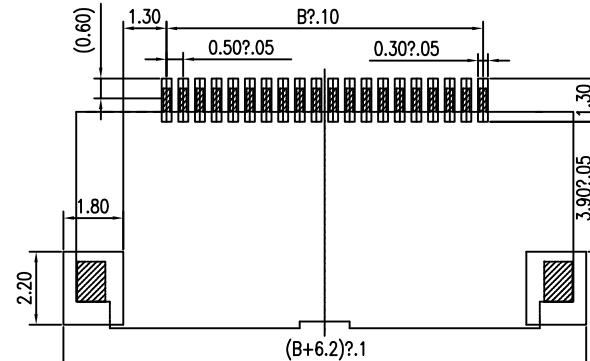




A	B	C	D	E	F
修订 REV A0	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE	
NEW DWG		2016-03-12			

NOTES:

1. HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
2. ACTUATOR: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
3. TERMINAL: PHOSPHOR BRONZE
PLATING: 1^u" GOLD FLASH OR 100~150^u" TIN(LEAD FREE)
OVERALL 50~100^u" NICKEL UNDER PLATED.
4. FITTING NAIL: BRASS
PLATING: 100~150^u" TIN(LEAD FREE)
OVERALL 50~100^u" NICKEL UNDER PLATED.
5. RATING:
OPERATING VOLTAGE: 50V AC,DC
CURRENT RATING: 0.5A AC,DC
OPERATING TEMPERATURE: -40°C ~ +85°C

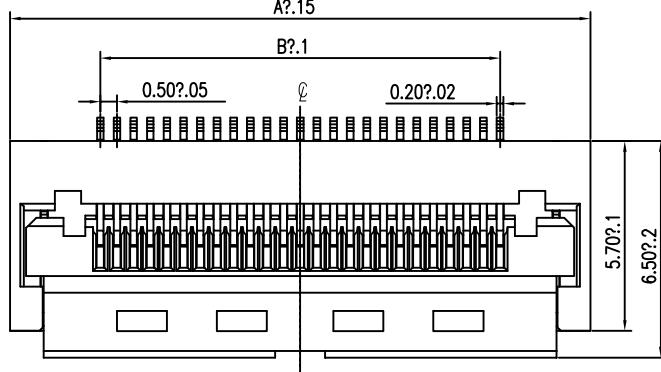

TOLERANCE : ± 0.05

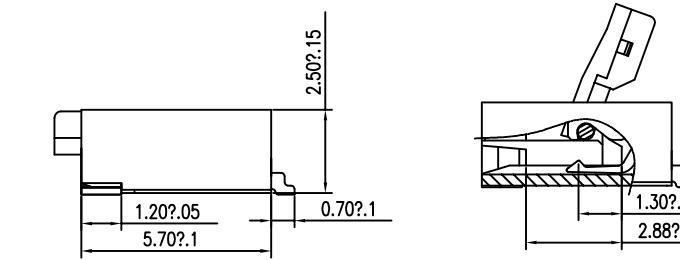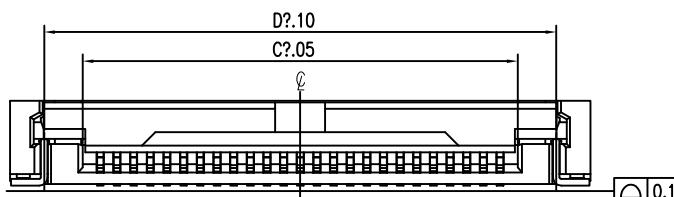

(B+2.6).05

(B+1).05

B2.05

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03

0.302.03






0.302.03

0.302.03

0.302.03

0.302.03</p

A	B	C	D	E	F
修订 REV AO	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE	
NEW DWG		2016-03-12			

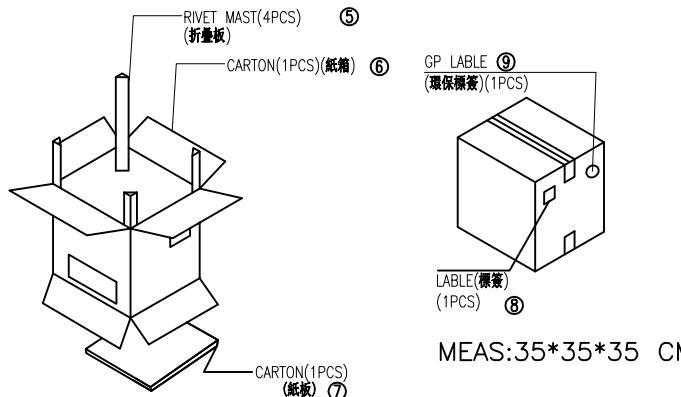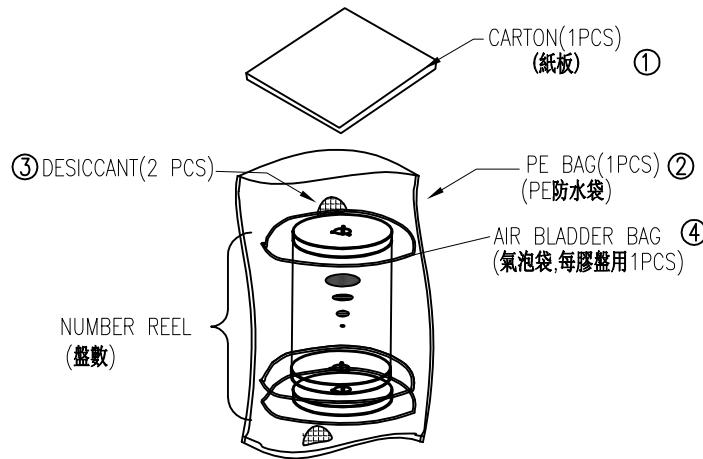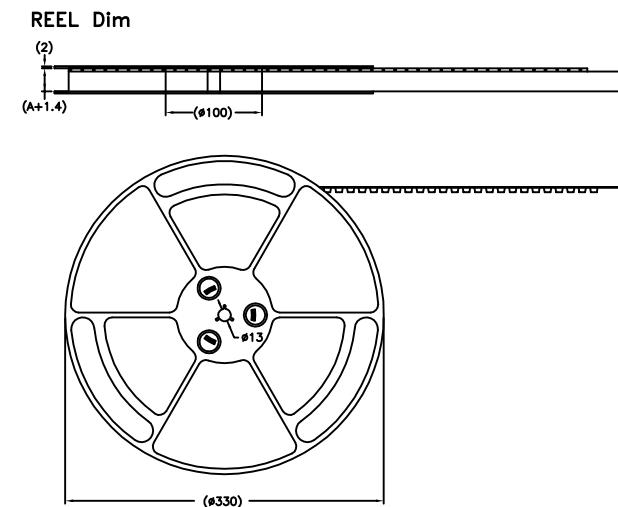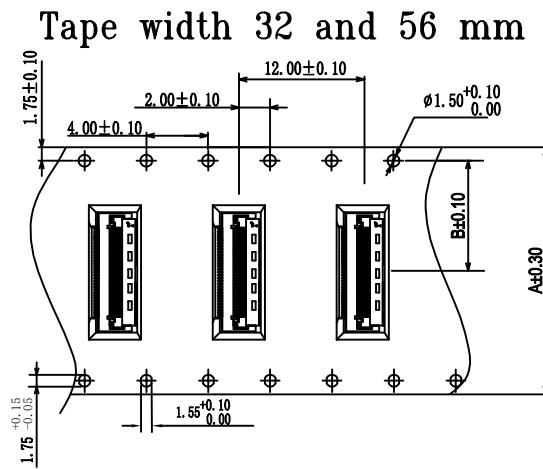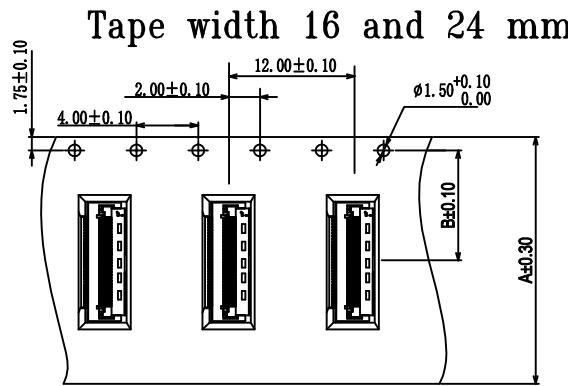

Notes:

- ▲ 1. Component load per 13" reel: 2000 (for 4P~40P)
Component load per 13" reel: 1500 (for 41P~80P)
2. Material: Black Conductive Polystyrene Alloy.
3. Thickness: 0.3±0.05mm
4. All dimensions meet EIA-481-C requirements.

No. of Contacts	DIM.			△ REEL (CARTON)	SUM (PCS)
8pin~9pin	A	B	C	15	30000
10pin~24pin	24	11.5	—	10	20000
25pin~35pin	32	14.2	28.4	8	16000
36pin~40pin	44	20.2	40.4	6	12000
41pin~50pin	44	20.2	40.4	6	9000
51pin~60pin	56	26.25	52.5	5	7500
80pin	72	34.25	68.4	4	6000



深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co., LTD
电话: 0755-23304126 传真: 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表		APPD* 核准:	TITLE: 产品名称: FPC0.5间距2.5高掀盖下接带扣					
X.X	±0.30	X.X*	±3*	CHECK: 校对:	DATE	SCALE	UNIT	CODE NUMBER
X.XX	±0.20	X.XX*	±2*	王建业				
X.XXX	±0.10	X.XXX*	±1*	黄艳兰	2016-03-12	1:1	mm	A001