


	0	1	2	3	4	5	6	7	8	9	10	11	
A							REV.	EC#	DESCRIPTION	DATE	DRAWN	CHECK	APPROVED
B							1.00		初版发行	2020-8-18			
C													
D													
E													
F													
G													
H													
	0	1	2	3	4	5	6	7	8	9	10	11	

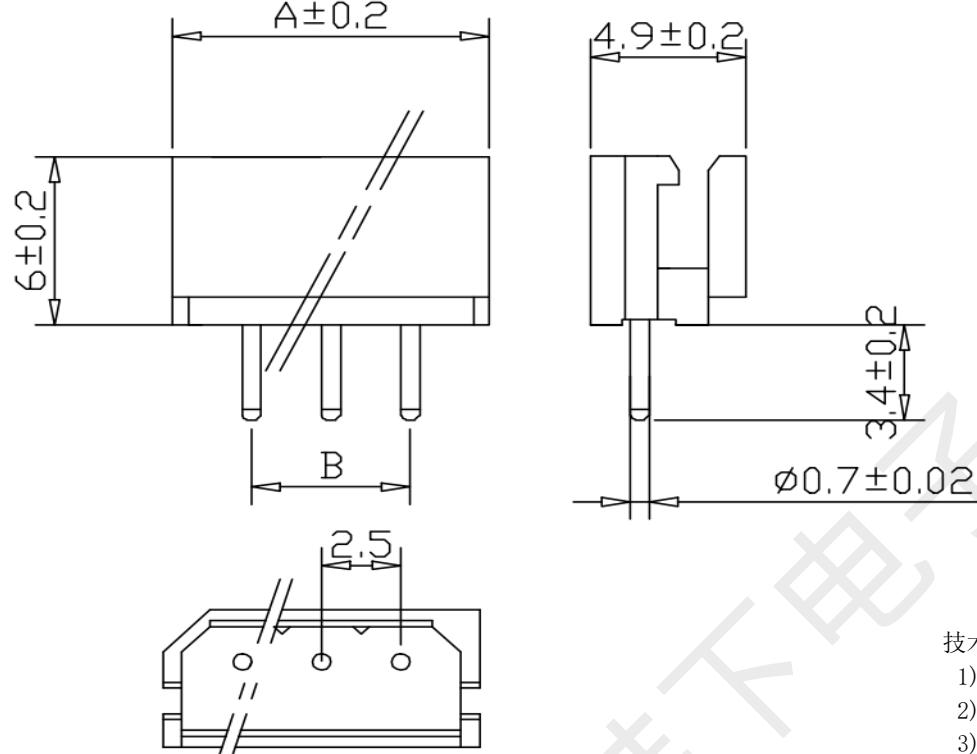

孔位	A	B
2	7.5	2.5
3	10	5.0
4	12.5	7.5
5	15.0	10.0
6	17.5	12.5
7	20.0	15.0
8	22.5	17.5
9	25.0	20.0
10	27.5	22.5
11	30.0	25.0
12	32.5	27.5
13	35.0	30.0
14	37.5	32.5
15	40.0	35.0

适应基板厚度: 1.2mm~1.6mm

温度范围: -25°C~85°C

额定电压: 250V AC/DC

额定电流: 3A

接触电阻:  $\leq 0.02\Omega$

绝缘电阻:  $\geq 1000M\Omega$

耐压: 1000V AC/minute

技术要求:

- 1) 材质: 见附表;
- 2) 电镀: 见附表;
- 3) 塑件表面平整、光洁、无毛刺、气泡、烧焦、变形、浇口无拉伤、多料或缺料等不良现象;
- 4) 端子表面无氧化、电镀不良等现象。

NO.	PIN	N PCS	材质: 黄铜, 电镀: 镀亮锡60u"MIN
1	Housing	1 PCS	材质: PA66GF30 (UL94V-0), 颜色: 米色
	NAME	Q'TY	DESCRIPTION

 深圳市韩下电子有限公司

DRAW:	黄彬	2020-8-18	TITLE: 针座	DRAW NAME: HX-5264-3A
DESIGN:				
CHECK:	张伟	2020-8-18	SERIES: 1501 SERIES	DRAW NO.:
APPROVED	罗小春	2020-8-18	P/N:	
CUSTOMER DRAWING			REV. 1.00	SCALE N/A
			UNIT: mm	SHEET: 1/1

GENERAL TOLERANCES

DIM	TOL	DIM	DEG
X.		X°.	±3.00°
X.X	±0.35	X.X°	±2.00°
X.XX	±0.25	X.XX°	±1.00°
X.XXX	±0.15	X.XXX°	

0

1

2

3

4

5

6

7

8

9

10

11