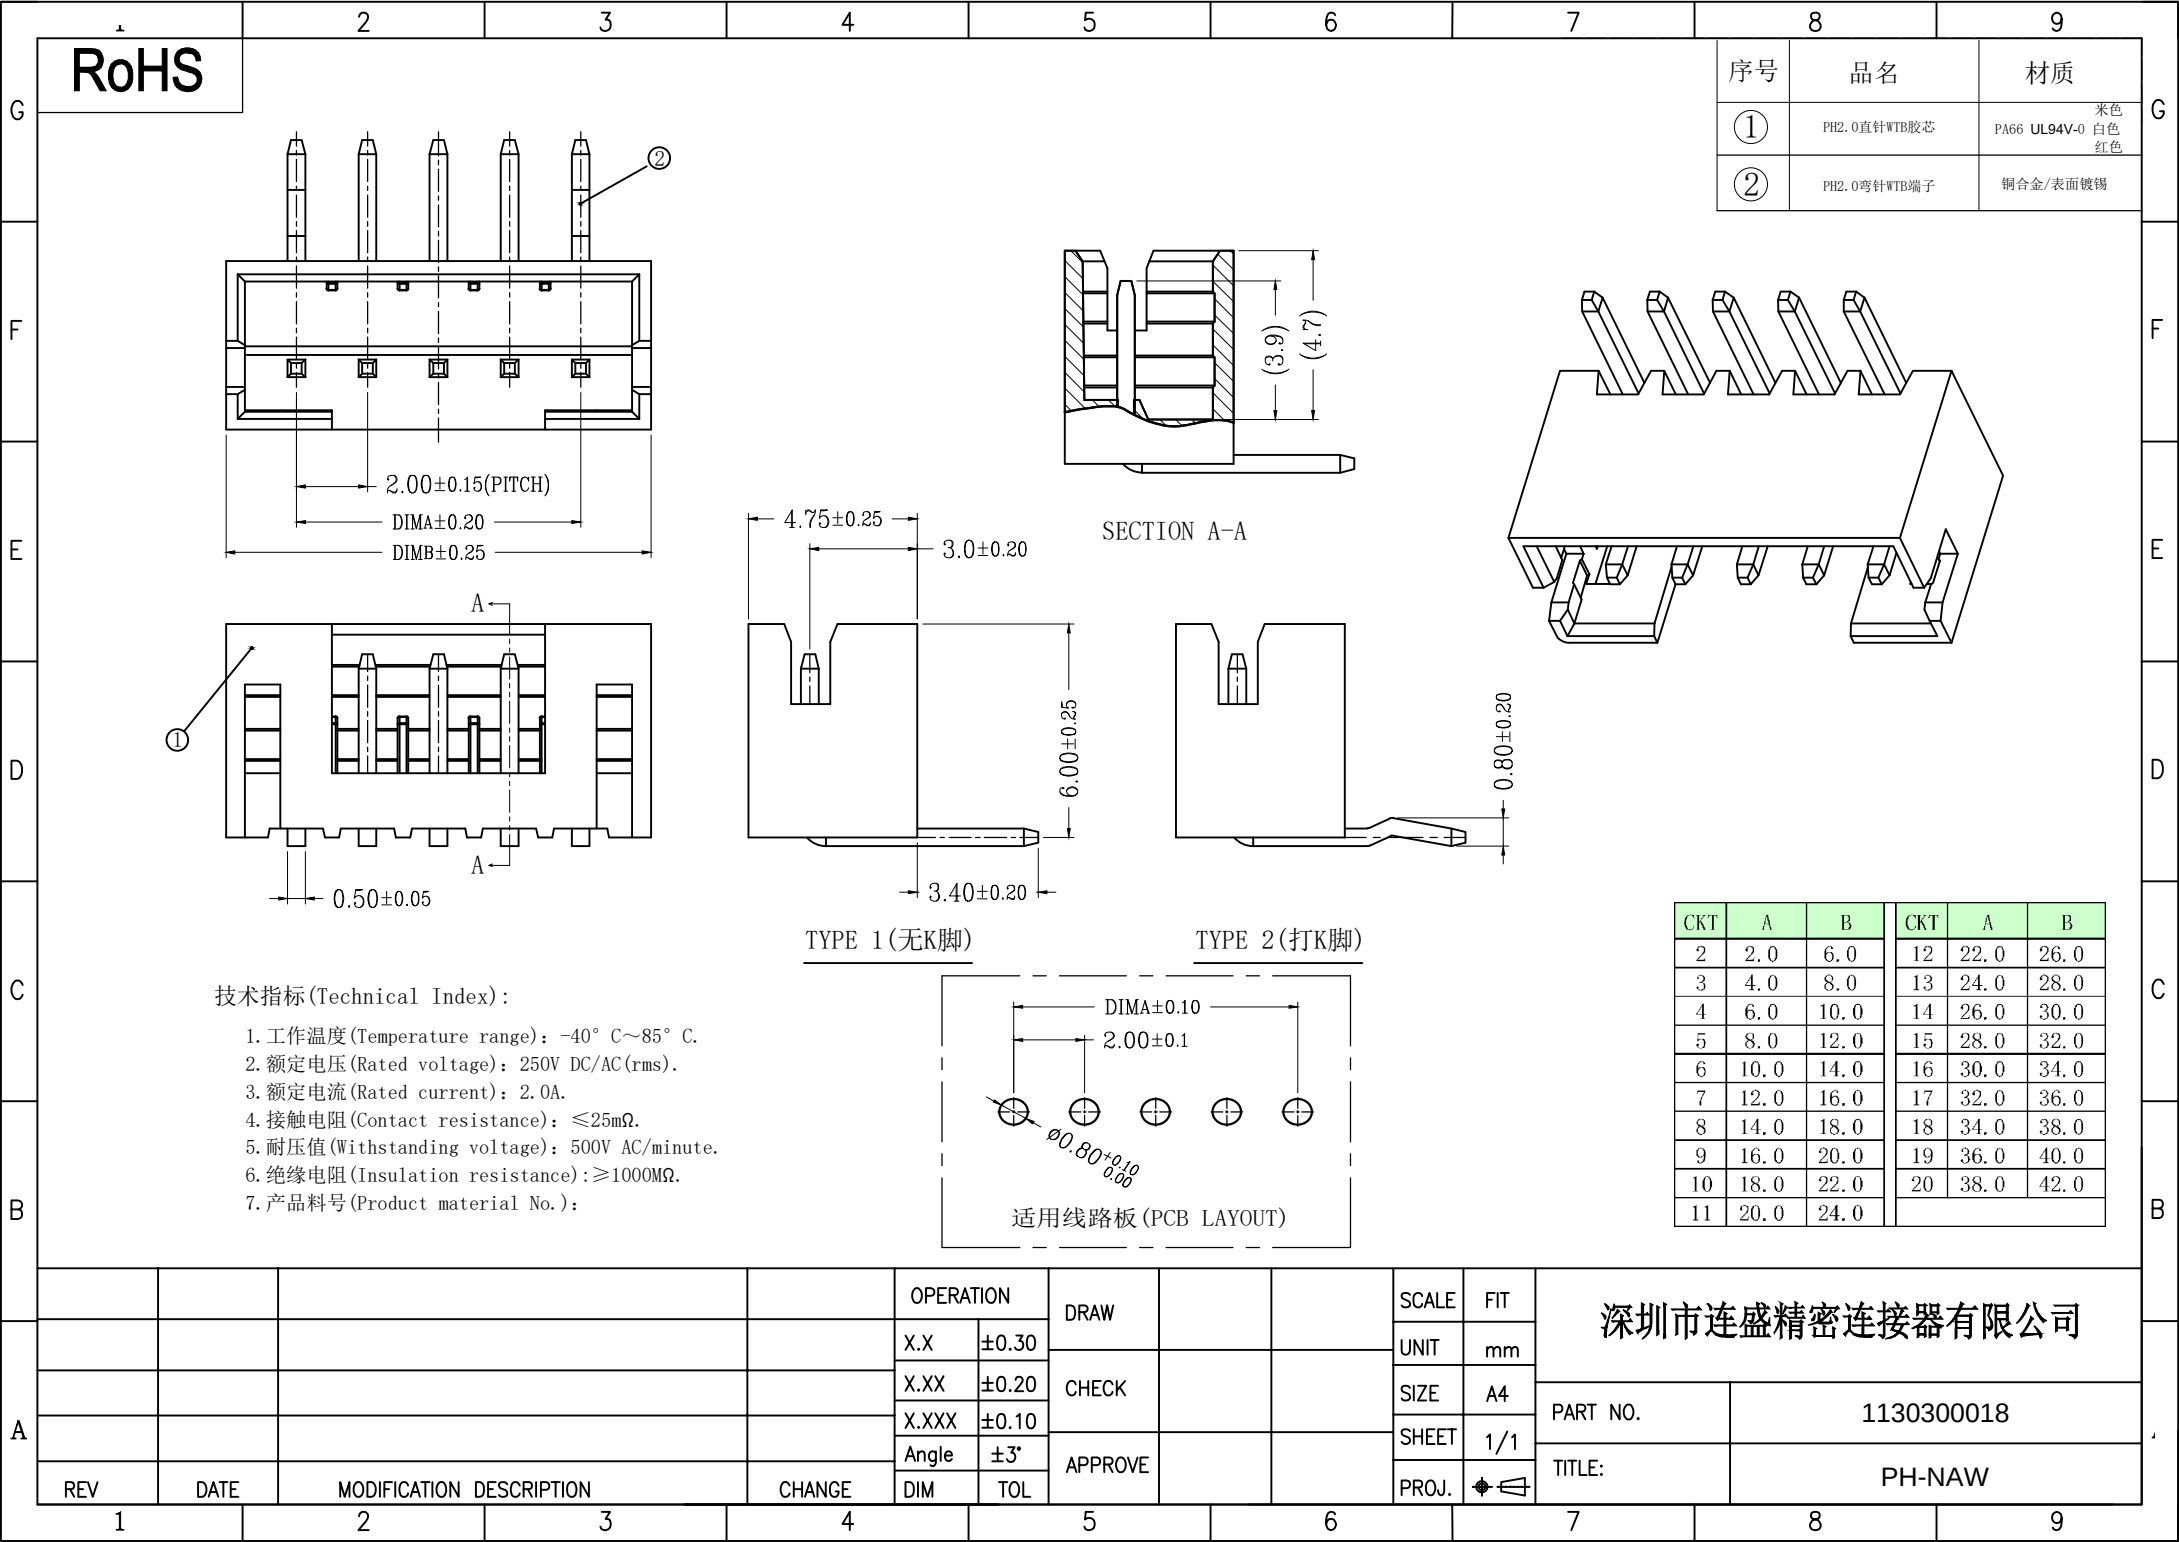
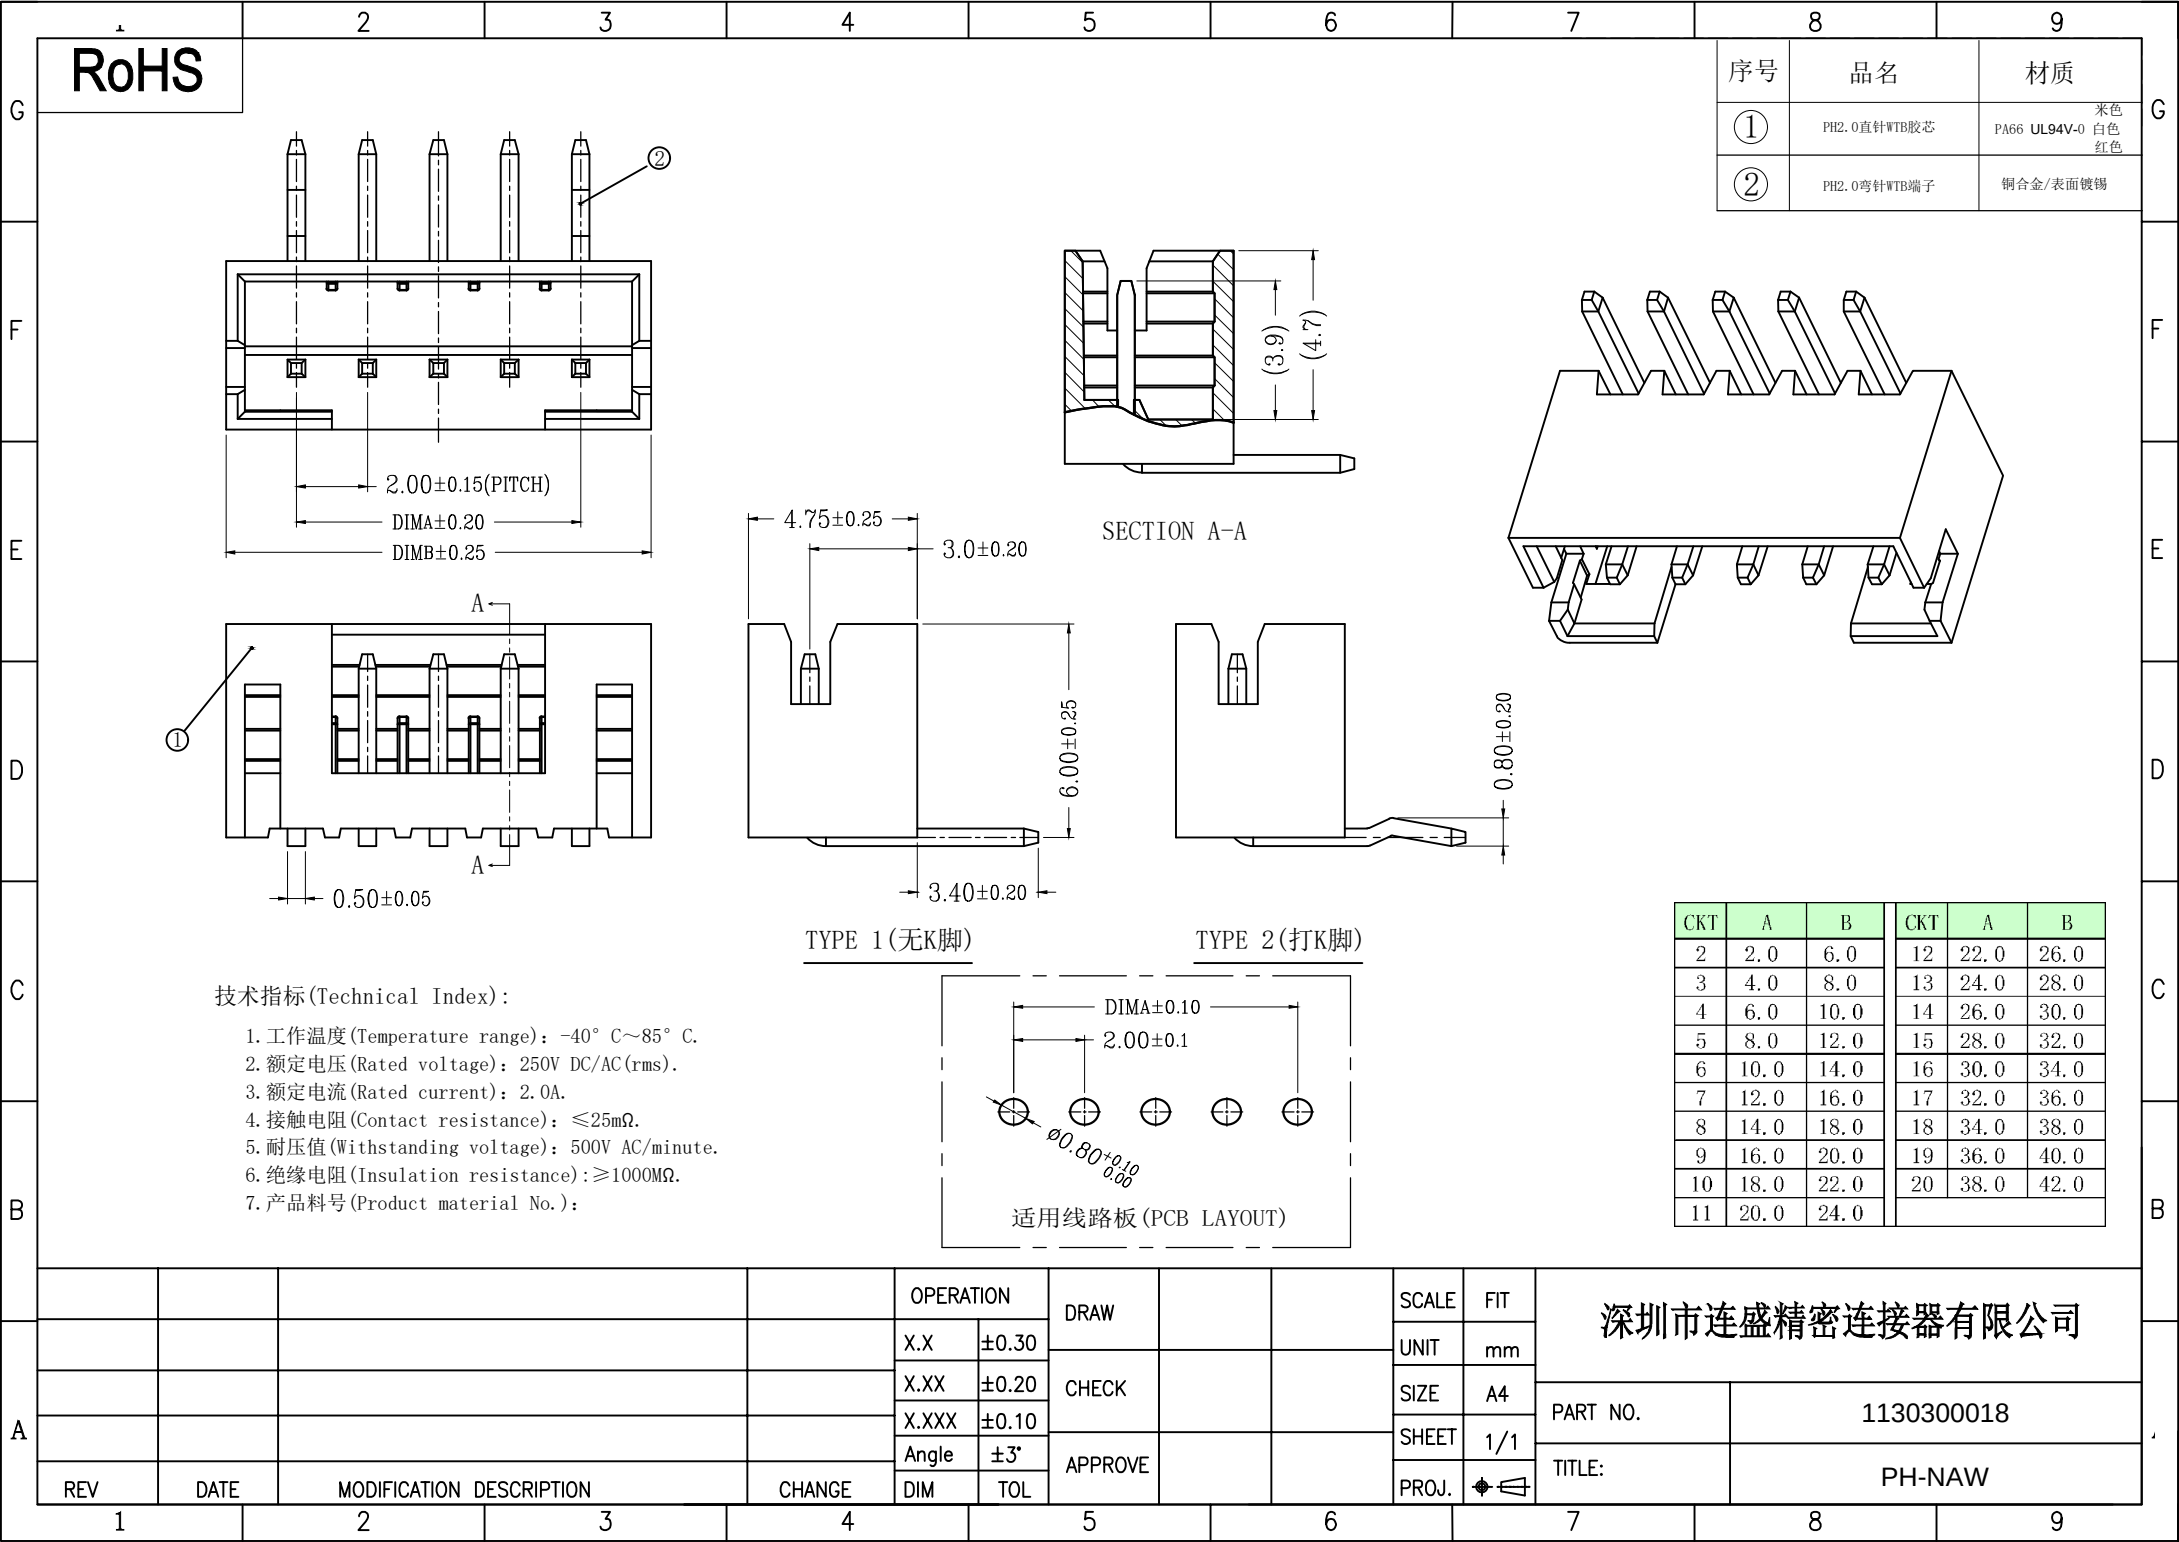
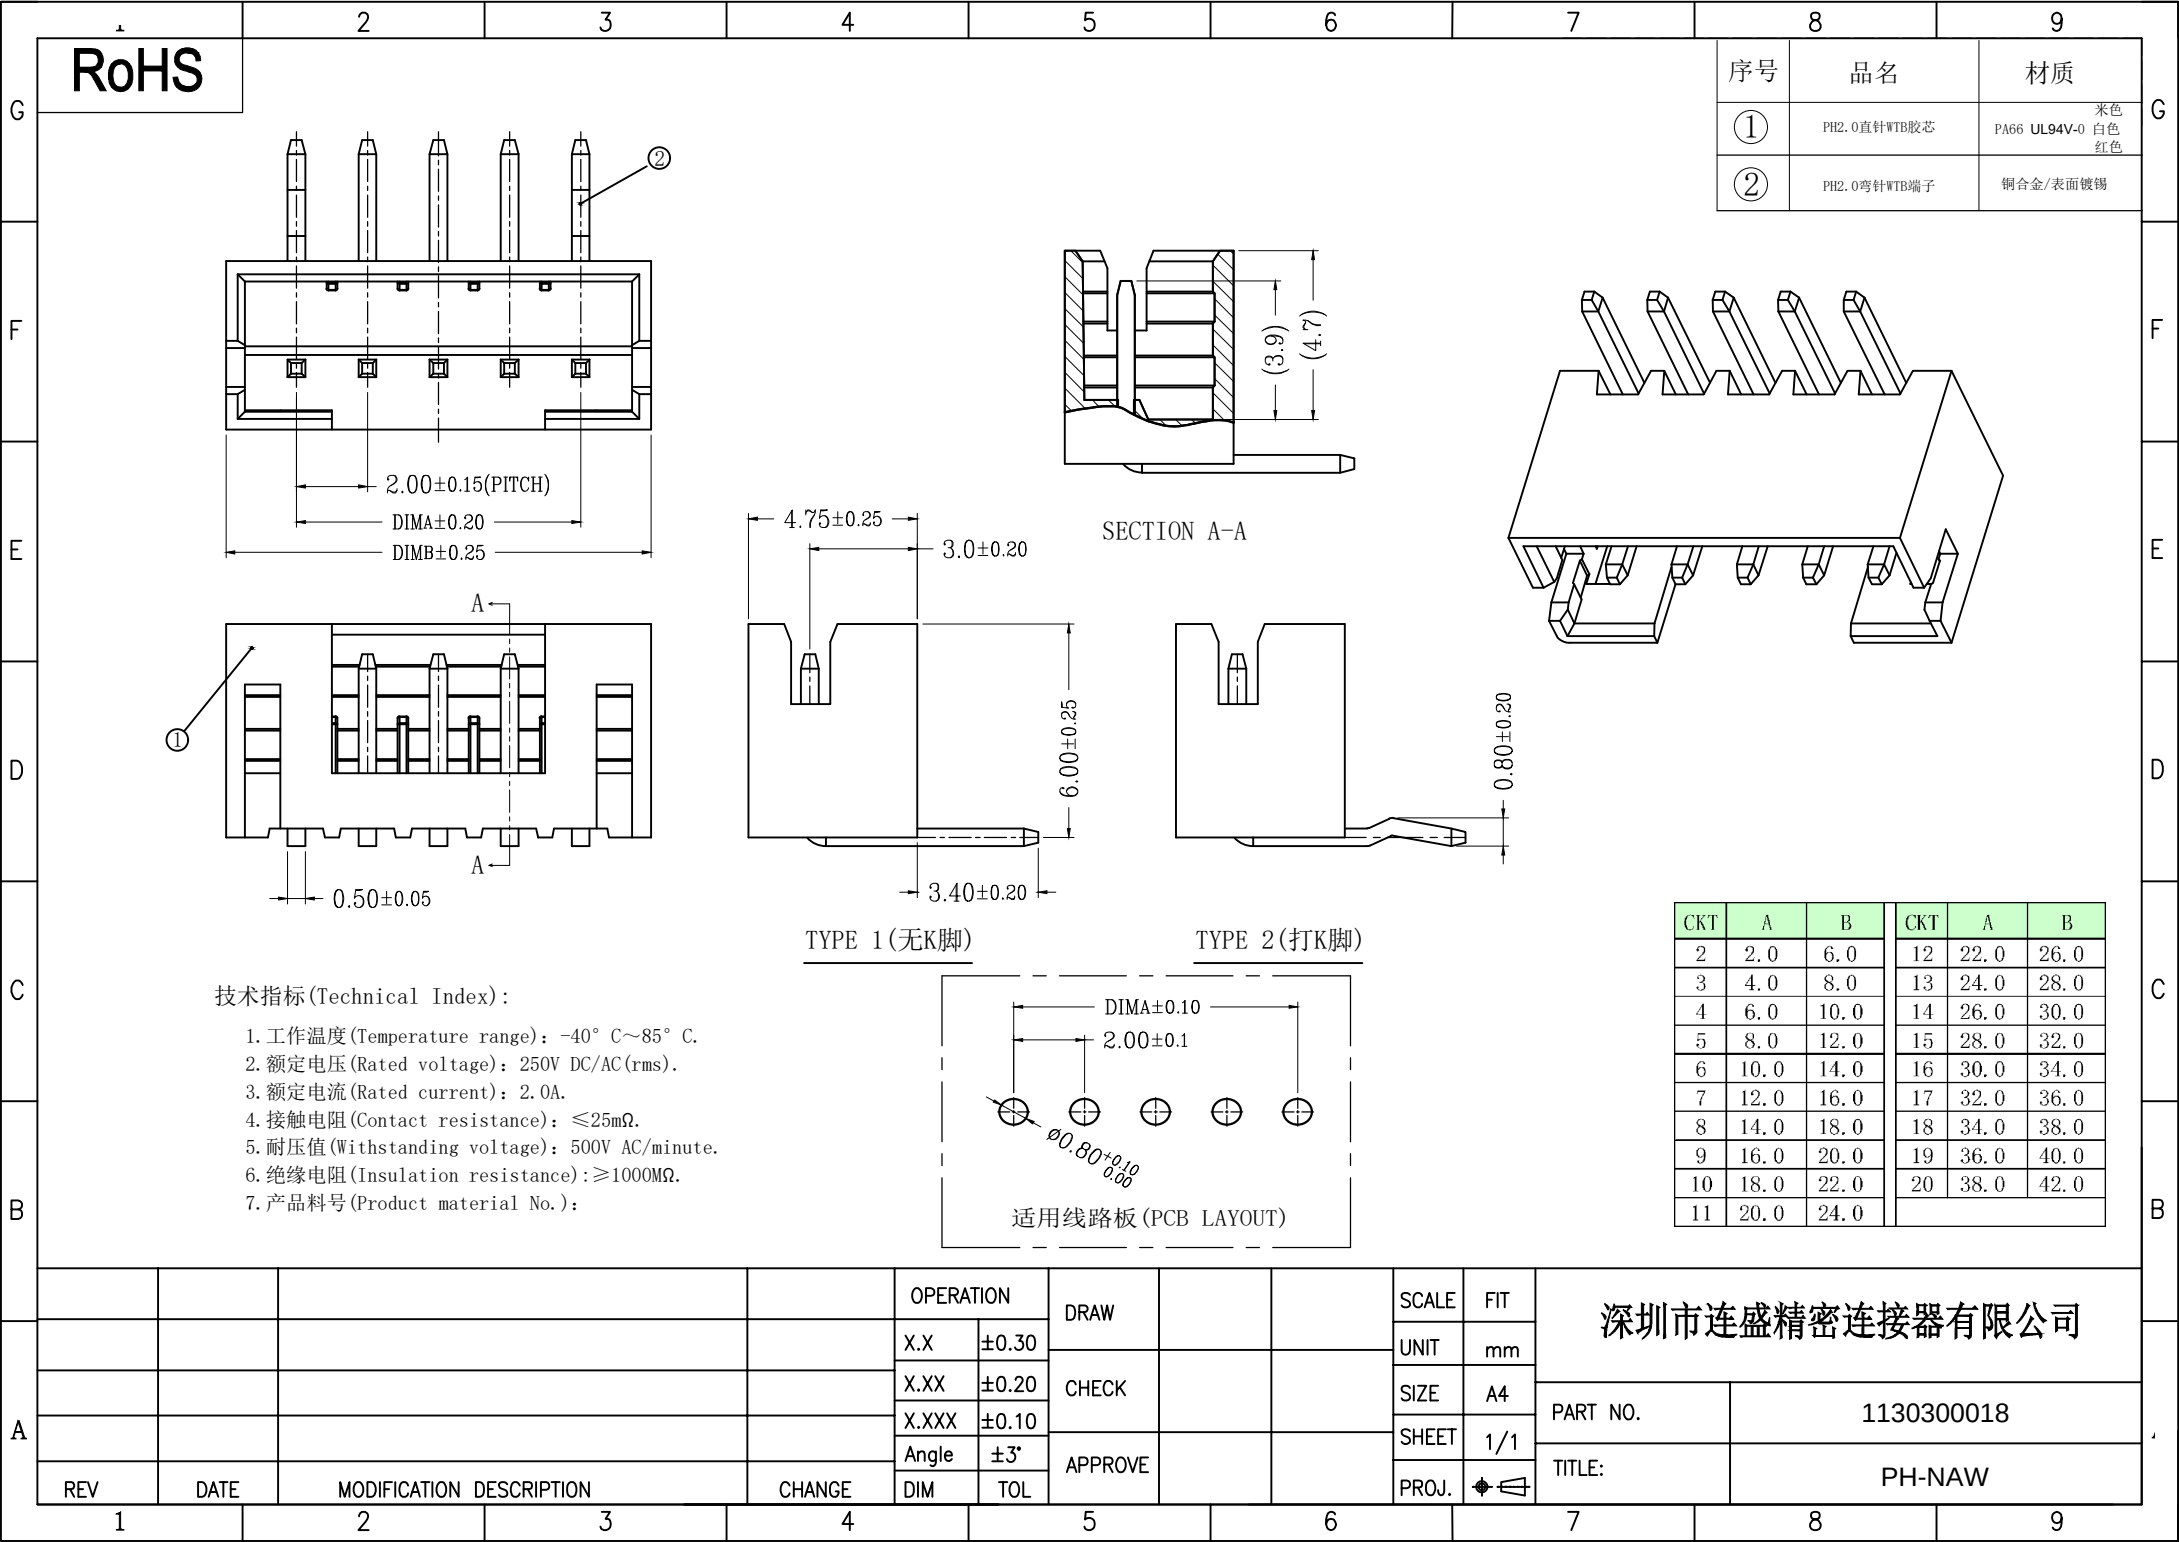
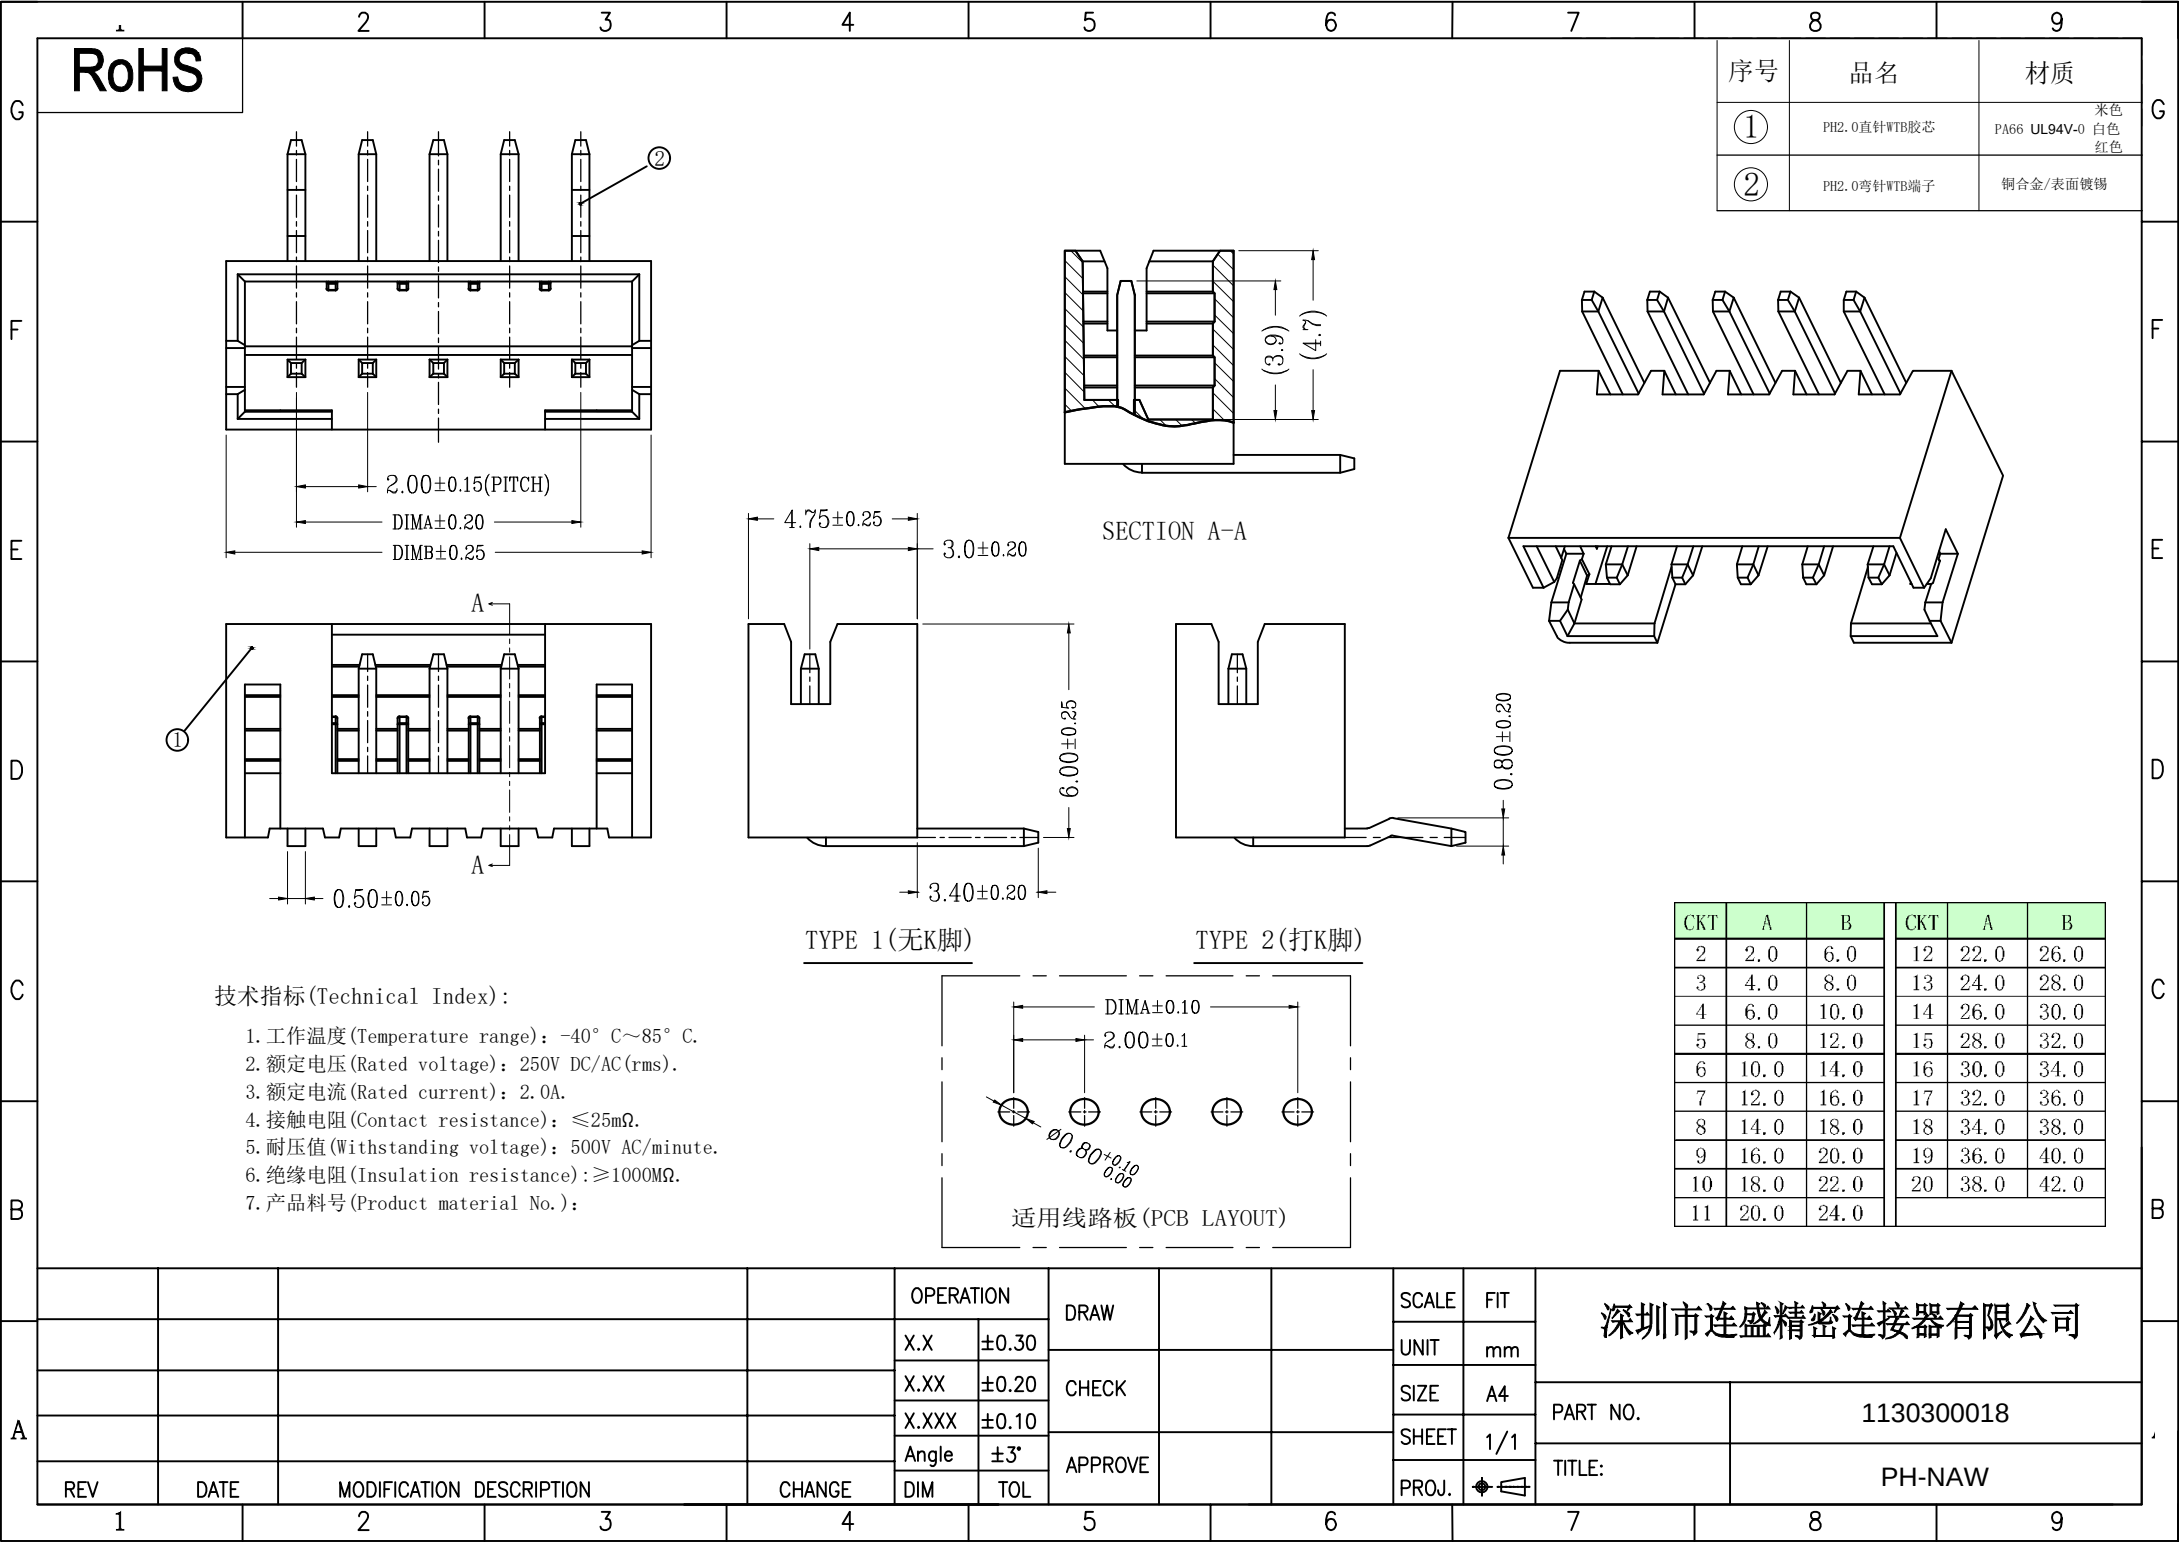


[illegible][illegible][illegible][illegible]

RoHS																																																																			
技术指标(Technical Index): 1. 工作温度(Temperature range): -40° C~85° C. 2. 额定电压(Rated voltage): 250V DC/AC(rms). 3. 额定电流(Rated current): 2.0A. 4. 接触电阻(Contact resistance): ≤25mΩ. 5. 耐压值(Withstanding voltage): 500V AC/minute. 6. 绝缘电阻(Insulation resistance): ≥1000MΩ. 7. 产品料号(Product material No.):																																																																			
<table border="1"><thead><tr><th>CKT</th><th>A</th><th>B</th><th>CKT</th><th>A</th><th>B</th></tr></thead><tbody><tr><td>2</td><td>2.0</td><td>6.0</td><td>12</td><td>22.0</td><td>26.0</td></tr><tr><td>3</td><td>4.0</td><td>8.0</td><td>13</td><td>24.0</td><td>28.0</td></tr><tr><td>4</td><td>6.0</td><td>10.0</td><td>14</td><td>26.0</td><td>30.0</td></tr><tr><td>5</td><td>8.0</td><td>12.0</td><td>15</td><td>28.0</td><td>32.0</td></tr><tr><td>6</td><td>10.0</td><td>14.0</td><td>16</td><td>30.0</td><td>34.0</td></tr><tr><td>7</td><td>12.0</td><td>16.0</td><td>17</td><td>32.0</td><td>36.0</td></tr><tr><td>8</td><td>14.0</td><td>18.0</td><td>18</td><td>34.0</td><td>38.0</td></tr><tr><td>9</td><td>16.0</td><td>20.0</td><td>19</td><td>36.0</td><td>40.0</td></tr><tr><td>10</td><td>18.0</td><td>22.0</td><td>20</td><td>38.0</td><td>42.0</td></tr><tr><td>11</td><td>20.0</td><td>24.0</td><td></td><td></td><td></td></tr></tbody></table>		CKT	A	B	CKT	A	B	2	2.0	6.0	12	22.0	26.0	3	4.0	8.0	13	24.0	28.0	4	6.0	10.0	14	26.0	30.0	5	8.0	12.0	15	28.0	32.0	6	10.0	14.0	16	30.0	34.0	7	12.0	16.0	17	32.0	36.0	8	14.0	18.0	18	34.0	38.0	9	16.0	20.0	19	36.0	40.0	10	18.0	22.0	20	38.0	42.0	11	20.0	24.0			
CKT	A	B	CKT	A	B																																																														
2	2.0	6.0	12	22.0	26.0																																																														
3	4.0	8.0	13	24.0	28.0																																																														
4	6.0	10.0	14	26.0	30.0																																																														
5	8.0	12.0	15	28.0	32.0																																																														
6	10.0	14.0	16	30.0	34.0																																																														
7	12.0	16.0	17	32.0	36.0																																																														
8	14.0	18.0	18	34.0	38.0																																																														
9	16.0	20.0	19	36.0	40.0																																																														
10	18.0	22.0	20	38.0	42.0																																																														
11	20.0	24.0																																																																	
<table border="1"><thead><tr><th colspan="4">OPERATION</th><th colspan="2">DRAW</th><th colspan="2">SCALE</th><th colspan="2">FIT</th></tr></thead><tbody><tr><td>X.X</td><td>±0.30</td><td colspan="2"></td><td colspan="2"></td><td>UNIT</td><td>mm</td><td colspan="2"></td></tr><tr><td>X.XX</td><td>±0.20</td><td colspan="2"></td><td colspan="2"></td><td>SIZE</td><td>A4</td><td colspan="2"></td></tr><tr><td>X.XXX</td><td>±0.10</td><td colspan="2"></td><td colspan="2"></td><td>SHEET</td><td>1/1</td><td colspan="2"></td></tr><tr><td>Angle</td><td>±3°</td><td colspan="2"></td><td colspan="2"></td><td>PROJ.</td><td></td><td colspan="2"></td></tr><tr><td>DIM</td><td>TOL</td><td colspan="2"></td><td colspan="2"></td><td colspan="4"></td></tr></tbody></table>		OPERATION				DRAW		SCALE		FIT		X.X	±0.30					UNIT	mm			X.XX	±0.20					SIZE	A4			X.XXX	±0.10					SHEET	1/1			Angle	±3°					PROJ.				DIM	TOL														
OPERATION				DRAW		SCALE		FIT																																																											
X.X	±0.30					UNIT	mm																																																												
X.XX	±0.20					SIZE	A4																																																												
X.XXX	±0.10					SHEET	1/1																																																												
Angle	±3°					PROJ.																																																													
DIM	TOL																																																																		
深圳市连盛精密连接器有限公司																																																																			
PART NO.		1130300018																																																																	
TITLE:		PH-NAW																																																																	

[illegible][illegible]

- | | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|--|--------------------------------|-------|------|----------------|------------|---|---|------|-------|-----|----------------|--------------|--------------------------------|-------|--------------|----------|-------|-------|-------|-----|---------|-------|-----|----------|------------|-----|-----|-------|----|------|--------|--------|-----|------|----|------|------|---|------|------|----|------|------|---|------|------|----|------|------|---|------|------|----|------|------|---|------|------|----|------|------|----|------|------|----|------|------|----|------|------|--|--|--|---|
| G | RoHS | | | | | | <table border="1"><tr><th>序号</th><th>品名</th><th>材质</th></tr><tr><td>①</td><td>PH2.0直针WTB胶芯</td><td>PA66 UL94V-0
米色
白色
红色</td></tr><tr><td>②</td><td>PH2.0弯针WTB端子</td><td>铜合金/表面镀锡</td></tr></table> | | 序号 | 品名 | 材质 | ① | PH2.0直针WTB胶芯 | PA66 UL94V-0
米色
白色
红色 | ② | PH2.0弯针WTB端子 | 铜合金/表面镀锡 | G | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 序号 | 品名 | 材质 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ① | PH2.0直针WTB胶芯 | PA66 UL94V-0
米色
白色
红色 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ② | PH2.0弯针WTB端子 | 铜合金/表面镀锡 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| F | | | | | | | | | F | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| E | | | | | | | | | E | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | | | | | | | | | D | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C | <p>技术指标(Technical Index):</p> <ol style="list-style-type: none">工作温度(Temperature range): -40° C~85° C.额定电压(Rated voltage): 250V DC/AC(rms).额定电流(Rated current): 2.0A.接触电阻(Contact resistance): ≤25mΩ.耐压值(Withstanding voltage): 500V AC/minute.绝缘电阻(Insulation resistance): ≥1000MΩ.产品料号(Product material No.): | | | | | | <table border="1"><thead><tr><th>CKT</th><th>A</th><th>B</th><th>CKT</th><th>A</th><th>B</th></tr></thead><tbody><tr><td>2</td><td>2.0</td><td>6.0</td><td>12</td><td>22.0</td><td>26.0</td></tr><tr><td>3</td><td>4.0</td><td>8.0</td><td>13</td><td>24.0</td><td>28.0</td></tr><tr><td>4</td><td>6.0</td><td>10.0</td><td>14</td><td>26.0</td><td>30.0</td></tr><tr><td>5</td><td>8.0</td><td>12.0</td><td>15</td><td>28.0</td><td>32.0</td></tr><tr><td>6</td><td>10.0</td><td>14.0</td><td>16</td><td>30.0</td><td>34.0</td></tr><tr><td>7</td><td>12.0</td><td>16.0</td><td>17</td><td>32.0</td><td>36.0</td></tr><tr><td>8</td><td>14.0</td><td>18.0</td><td>18</td><td>34.0</td><td>38.0</td></tr><tr><td>9</td><td>16.0</td><td>20.0</td><td>19</td><td>36.0</td><td>40.0</td></tr><tr><td>10</td><td>18.0</td><td>22.0</td><td>20</td><td>38.0</td><td>42.0</td></tr><tr><td>11</td><td>20.0</td><td>24.0</td><td></td><td></td><td></td></tr></tbody></table> | | CKT | A | B | CKT | A | B | 2 | 2.0 | 6.0 | 12 | 22.0 | 26.0 | 3 | 4.0 | 8.0 | 13 | 24.0 | 28.0 | 4 | 6.0 | 10.0 | 14 | 26.0 | 30.0 | 5 | 8.0 | 12.0 | 15 | 28.0 | 32.0 | 6 | 10.0 | 14.0 | 16 | 30.0 | 34.0 | 7 | 12.0 | 16.0 | 17 | 32.0 | 36.0 | 8 | 14.0 | 18.0 | 18 | 34.0 | 38.0 | 9 | 16.0 | 20.0 | 19 | 36.0 | 40.0 | 10 | 18.0 | 22.0 | 20 | 38.0 | 42.0 | 11 | 20.0 | 24.0 | | | | C |
| CKT | A | B | CKT | A | B | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 2.0 | 6.0 | 12 | 22.0 | 26.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 4.0 | 8.0 | 13 | 24.0 | 28.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 6.0 | 10.0 | 14 | 26.0 | 30.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 8.0 | 12.0 | 15 | 28.0 | 32.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | 10.0 | 14.0 | 16 | 30.0 | 34.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | 12.0 | 16.0 | 17 | 32.0 | 36.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | 14.0 | 18.0 | 18 | 34.0 | 38.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | 16.0 | 20.0 | 19 | 36.0 | 40.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | 18.0 | 22.0 | 20 | 38.0 | 42.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | 20.0 | 24.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | | | | | | | | | B | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A | <table border="1"><thead><tr><th colspan="2">OPERATION</th><th rowspan="4">DRAW</th><th rowspan="4">SCALE</th><th rowspan="4">FIT</th><th colspan="2" rowspan="4">深圳市连盛精密连接器有限公司</th></tr><tr><th>X.X</th><th>±0.30</th></tr><tr><th>X.XX</th><th>±0.20</th></tr><tr><th>X.XXX</th><th>±0.10</th></tr></thead><tbody><tr><td>Angle</td><td>±3°</td><th>APPROVE</th><th>SHEET</th><td>1/1</td><th>PART NO.</th><td>1130300018</td></tr><tr><td>DIM</td><td>TOL</td><th>PROJ.</th><td>◆</td><td></td><th>TITLE:</th><td>PH-NAW</td></tr></tbody></table> | | | | | | OPERATION | | DRAW | SCALE | FIT | 深圳市连盛精密连接器有限公司 | | X.X | ±0.30 | X.XX | ±0.20 | X.XXX | ±0.10 | Angle | ±3° | APPROVE | SHEET | 1/1 | PART NO. | 1130300018 | DIM | TOL | PROJ. | ◆ | | TITLE: | PH-NAW | | | A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| OPERATION | | DRAW | SCALE | FIT | 深圳市连盛精密连接器有限公司 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X.X | ±0.30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X.XX | ±0.20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X.XXX | ±0.10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Angle | ±3° | APPROVE | SHEET | 1/1 | PART NO. | 1130300018 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DIM | TOL | PROJ. | ◆ | | TITLE: | PH-NAW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

[illegible]