

General Description

The CMSA4006A uses advanced technology to provide excellent $R_{DS(ON)}$. This device is suitable to be used as the low side FET in SMPS, load switching and general purpose.

Features

- Lower On-resistance
- 100% avalanche tested
- RoHS Compliant

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	40	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D @ T_C = 25^\circ\text{C}$	Continuous Drain Current	80	A
I_{DM}	Pulsed Drain Current	320	A
EAS	Single Pulse Avalanche Energy ¹	225	mJ
$P_D @ T_C = 25^\circ\text{C}$	Total Power Dissipation	60	W
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	---	50	$^\circ\text{C}/\text{W}$
$R_{\theta JC}$	Thermal Resistance Junction -Case	---	2.08	$^\circ\text{C}/\text{W}$


Product Summary

BVDSS	$R_{DS(on)}$ max.	ID
40V	4.5mΩ	80A

Applications

- Load Switch
- Networking DC-DC Power System
- High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA

DFN-8 5x6 Pin Configuration

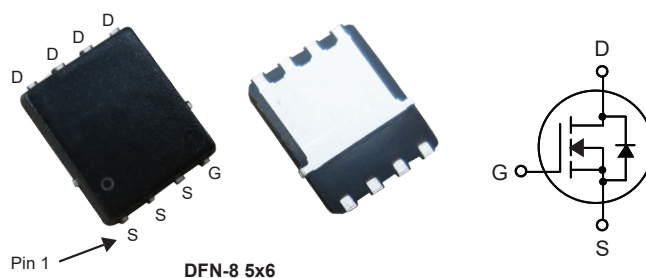

Type	Package	Marking
CMSA4006A	DFN-8 5x6	CMSA4006A

Electrical Characteristics ($T_J=25^{\circ}\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=250\mu A$	40	---	---	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=10V$, $I_D=20A$	---	3.8	4.5	mΩ
		$V_{GS}=4.5V$, $I_D=15A$	---	5	7	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=250\mu A$	1	---	3	V
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=32V$, $V_{GS}=0V$	---	---	1	uA
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V$, $V_{DS}=0V$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{DS}=5V$, $I_D=10A$	---	30	---	S
R_g	Gate Resistance	$V_{DS}=0V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	1.5	---	Ω
Q_g	Total Gate Charge	$V_{DD}=20V$, $I_D=30A$ $V_{GS}=0$ to $10V$	---	27	---	nC
Q_{gs}	Gate-Source Charge		---	12	---	
Q_{gd}	Gate-Drain Charge		---	4	---	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=20V$, $V_{GS}=10V$, $R_G=1.6\Omega$ $I_D=30A$	---	13	---	ns
T_r	Rise Time		---	3	---	
$T_{d(off)}$	Turn-Off Delay Time		---	17	---	
T_f	Fall Time		---	4	---	
C_{iss}	Input Capacitance	$V_{DS}=25V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	3400	---	pF
C_{oss}	Output Capacitance		---	250	---	
C_{rss}	Reverse Transfer Capacitance		---	180	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Diode continuous forward current	$V_G=V_D=0V$, Force Current	---	---	80	A
$I_{S,pulse}$	Diode pulse current		---	---	320	A
V_{SD}	Diode Forward Voltage	$V_{GS}=0V$, $I_S=3A$, $T_J=25^{\circ}\text{C}$	---	0.74	1.2	V

Notes

1. 1.The EAS data shows Max. rating . The test condition is $V_{DD}=30V$, $V_{GS}=10V$, $L=0.5\text{mH}$, $I_{AS}=30A$.

This product has been designed and qualified for the consumer market.


Cmos assumes no liability for customers' product design or applications.

Cmos reserves the right to improve product design ,functions and reliability without notice.Please refer to the latest version of specification.

Package Dimension

DFN-8 5x6

Unit :mm

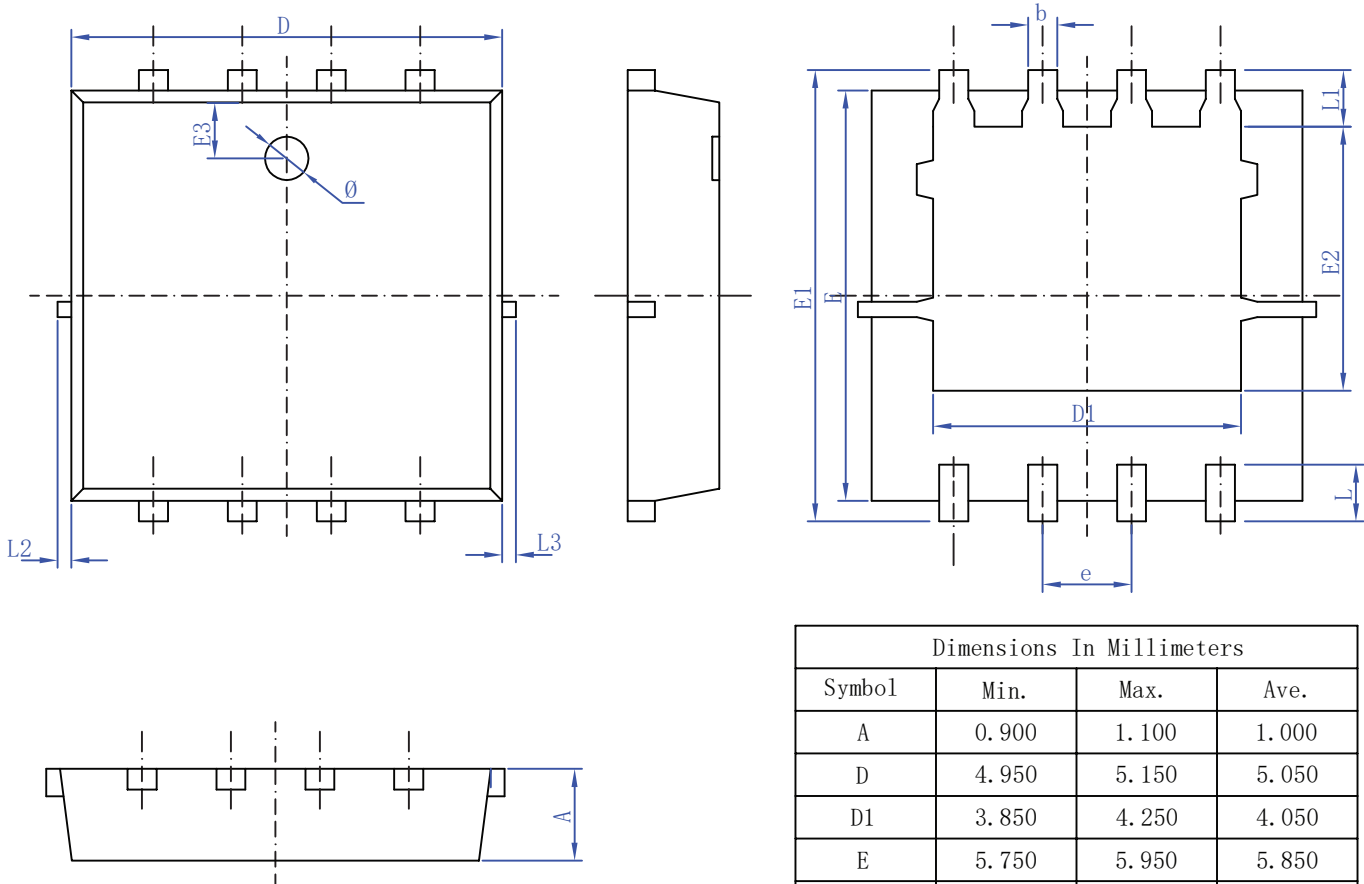

注：
1. 未注公差±0.05未标注圆角R max=0.25

Dimensions In Millimeters			
Symbol	Min.	Max.	Ave.
A	0.900	1.100	1.000
D	4.950	5.150	5.050
D1	3.850	4.250	4.050
E	5.750	5.950	5.850
E1	5.950	6.350	6.150
E2	3.300	3.700	3.500
E3	0.900	1.300	1.100
b	0.250	0.350	0.300
e	1.220	1.320	1.270
L	0.585	0.785	0.685
L1	0.525	0.725	0.625
Ø	1.000	1.400	1.200
L2	0~0.100		
L3	0~0.100		