

规 格 书
SPECIFICATION

客户 CUSTOMER	立创商城
客户料号 CUSTOMER P/N	
规格描述 DESCRIPTION	1KV/0.1UF/J/F0/卧式/L35/26*10.5*5.5/ZNR
产品编码 PART NUMBER	CFT3A104J0D0260P6100
日期 DATE	2025-10-15

德尔创承认栏 APPROVED BY DERSONIC			客户承认栏 APPROVED BY CUSTOMER	
批 准 APPROVED BY	审 核 CHECK BY	制订 FORMULATE BY	批 准 APPROVED BY	审 核 CHECK BY
				

东莞市德尔创电子有限公司

DONGGUAN DERSONIC ELECTRONIC CO., LTD.

中国广东省东莞市寮步镇松湖智谷科技产业园2栋15楼
15/F, Building 2, Songhu Zhigu Science and Technology Industrial Park,
Liaobu Town, Dongguan City, Guangdong Province, China
TEL: +86-769-8533 5208 FAX: +86-769-8155 5989
Website: <http://www.dersonic.com>

D


C

B


A

TECHNICAL PARAMETERS		
ELECTRICAL CHARACTERISTICS :		
1	Rated capacitance(C_R)	0.1 μ F
2	Capacitance tolerance	$\pm 10\%$
3	Rated voltage(VR)	1000VDC
TEST PARAMETERS :		
4	Voltage proof between terminals	Apply DC*1.5 times of U_R for 60 +/-5sec or 1.75 times of U_R (DC) for 2 sec.
5	Insulation resistance(IR* C_R)	CR $\leq$ 0.33 μ F $\geq$ 30000M Ω CR>0.33 μ F $\geq$ 10000M Ω /uF (At 100VDC, 1min ,20~25 $^{\circ}$ C)
6	Dissipation factor(DF)	$\leq$ 0.001(0.1%) at 1 KHz
WORK ENVIRONMENT :		
7	Climatic category	40/85/21
8	Operating temperature range	-40 $^{\circ}$ C to +85 $^{\circ}$ C
9	Standard	IEC60384-16
CONSTRUCTION:		
10	Dielectric	Metallized polypropylene
11	Metal spray	Special Solder
12	Filler	Epoxy resin
13	Outer envelope	Mylar Tape
14	Lead wire	Lead wire Diameter 0.6mm
Other		

PRODUCT DIMENSIONS						CUSTOMER P/N
P/N	Dimension(mm)					
	W (+1.5/-1)	H (±1)	T (±1)	L (Min)	φd ±0.05	
CFT3A104J0DO260P6100	26.0	10.5	5.5	30.0	0.6	

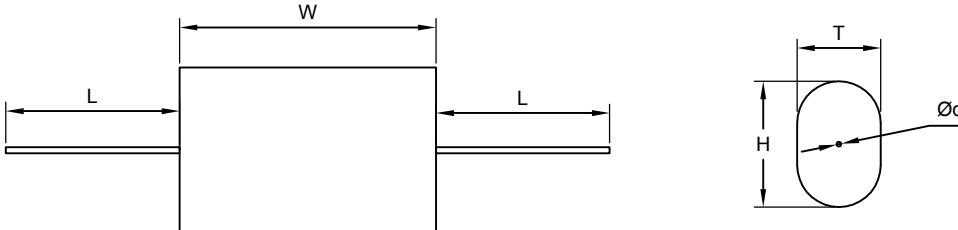

The top view shows a rectangular capacitor with width W and length L. The side view shows a cylindrical capacitor with height H and diameter Ød. The top view also shows the thickness T of the capacitor.

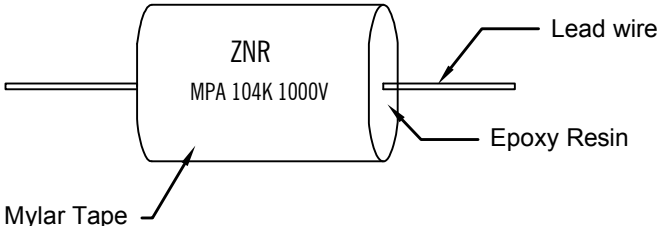

The 3D perspective view shows the capacitor with the following labels: ZNR, MPA 104K 1000V, Mylar Tape, Lead wire, and Epoxy Resin.

D

C

B

A