

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PBT+30%G. F UL94V-0, Color: Black

端子: 青铜, 镍底30u"MIN, 表面镀普金

Contact: Bronze, GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω MIN.



Insulating Resistance: 1000 M Ω MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.


温度范围: -40°C to $+105^{\circ}\text{C}$

Temperature Range: -40°C to $+105^{\circ}\text{C}$

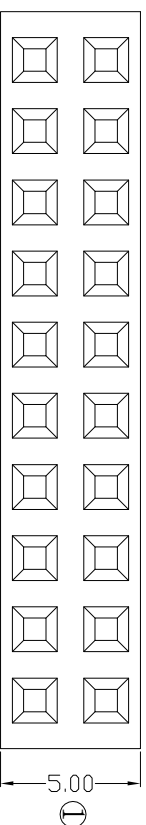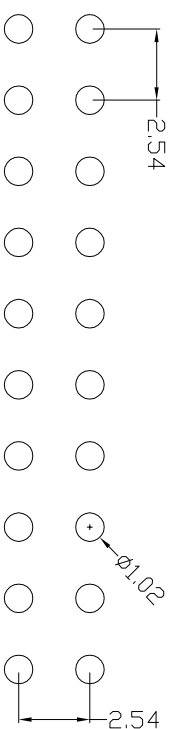

Ordering Information

F185-12 10 A0 A SU C 2

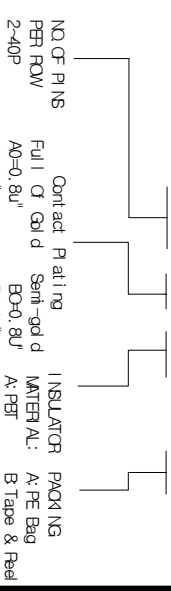

Full I	Q	Qd	Sent	ingd	INSULATOR	PAQ4 NG
A0=0	8u"		B0=0	8U"	A PBT	A PE Bag
A1=10u"			B1=1U"		B P6T	B Tape & Peel
A2=1, 5u"			B2=1, 5U"		C P6T	C Tube
A3=2u"			B3=2U"		D LCP	D Tube+CAP
A4=3u"			B4=3U"			E Tray
A5=5u"			B5=5U"			
A6=10u"			B6=10U"			
A7=15u"			B7=15U"			
A8=20u"			B8=20U"			
A9=30u"			B9=30U"			
S1=O of nary	Tin	Pi	at ed			
S2=Alatte	Tin	Pi	at ed			
S3=Ti	n-p	at ed	H	q	t	empera ure


ROHS

COMPLIANT

客编: K8002

1. 帶*为品质重点检验尺寸

注意事项

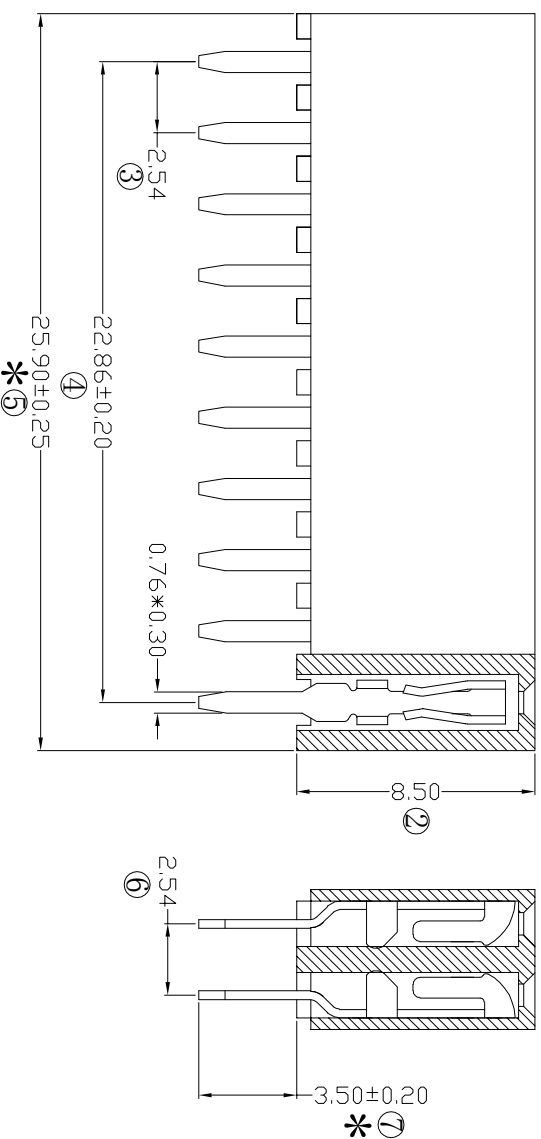

			YXCON 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.						
			OPERATION		SCALE		FIT	 YXCON www.yxcon.com F185-1210A0ASUC2	
			X.X	±0.25	UNIT	MM			
			X.XX	±0.20					
			X.XXX	±0.10					
A0	2021.07.07	/	新版发行		Angle	1/1	CHECK	TITLE:	2.54排母8.5mm间距 2*10P 180度 DIP:3.5 塑高=5.0mm 0型A款 B材料 镀锌金 160个/盒
REV	DATE	SMBQ	MOD FICANT DESCP PII ON		CI M	TOL	PPQL	APPROVE	Customer No.