



高速光耦

High Speed Photo Coupler

QXH611

宁波群芯微电子股份有限公司
NINGBO QUNXIN MICROELECTRONICS CO., LTD.

中国 浙江省宁波杭州湾新区玉海东路 68 号
68 Yuhaidong Road, Hangzhou Bay New District, Ningbo, Zhejiang, China

概述 Description

QXH611 内部有一个 850nm 的 AlGaAs LED，其光学耦合到具有选通输出的超高速集成光电检测器。这些器件采用 8 引脚外形封装，符合标准封装外形。

The QXH611 optocoupler consists of a 850 nm AlGaAs LED, optically coupled to a very high speed integrated photo-detector logic gate with a strobable output. The devices are packaged in a 8-pin small outline package which conforms to the standard footprint.

特性 Features

- 高比特率: 10 MBit/s
High speed – 10 MBit/s
- 工作温度: -40°C~+125°C
Operating Temperature: -40°C to +125°C
- 符合加强绝缘标准
Meet reinforced insulation standards
- 符合安规标准: UL 1577, VDE DIN EN60747-5-5 (VDE 0884-5) , CQC11-471543-2022
Meet Safety standard : UL 1577, VDE DIN EN60747-5-5 (VDE 0884-5) , CQC11-471543-2022

应用 Applications

- 接地回路消除
Ground loop elimination
- LSTTL 转 TTL, LSTTL 或 5V CMOS
LSTTL to TTL, LSTTL or 5-volt CMOS
- 线路接收器, 数据传输
Line receiver, data transmission
- 开关电源
Switching power supplies
- 计算机外围接口
Computer-peripheral interface


真值表 Truth table

LED	VO
OFF	H
ON	L

封装和原理图 Package and Schematic Diagram



LSOP8

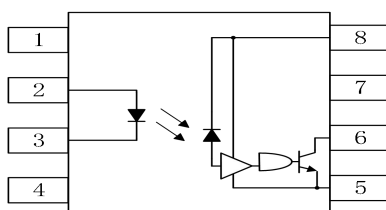

Pin Configuration

1. NC	8.VCC
2. Anode	7.NC
3. Cathode	6.VO
4. NC	5.GND

注: 在引脚 5 和 8 之间必须连接一个 0.1uF 的旁路电容器。

Note: 0.1uF bypass capacitor must be connected between pins 5 and 8.

产品型号命名规则 Order Code


QX H611 - UN Y - W (V) (ZZ)

① ② ③ ④ ⑤ ⑥ ⑦

- ① 公司代码 Company Code (QX: 群芯 Qunxin)
- ② 产品系列 Product Series (H611)
- ③ 框架类型 Lead Frame (Cu: 铜框架 Copper)
- ④ 树脂类型 Epoxy Type (H: 无卤 Halogen-free)
- ⑤ 封装形式 Package (L: LSOP)
- ⑥ 器件工作温度范围 Device Operating Temperature Range (特殊范围需填或者空白 Special Range need to be filled in or left blank)
- ⑦ 内部补充代码 Internal Supplementary Code (数字或者空白 Number or None)

印字信息 Marking Information

- 印字中“”为群芯品牌 LOGO
“”denotes LOGO
- 印字中“Y”代表年份; A(2018),B(2019),C(2020).....
“Y”denotes YEAR: A(2018), B(2019), C(2020).....
- 印字中“WW”代表周号
“WW”denotes week's number
- 印字中“N”代表星期几
“N”denotes day of the week
- 印字中的“H”代表无卤
“H”denotes Halogen-free

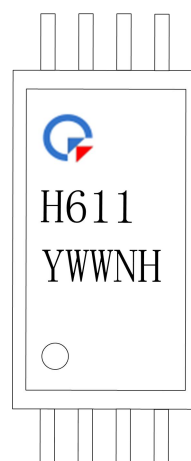

绝缘和安规信息 Insulation and Safety related specifications

项目 Item	符号 Symbol	数值 Value	单位 Unit	备注 Note
爬电距离 Creepage Distance	L	>15	mm	从输入端到输出端，沿本体最短距离路径 Measured from input terminals to output terminals, shortest distance path along body.
电气间隙 Clearance Distance	L	>15	mm	从输入端到输出端，通过空气的最短距离 Measured from input terminals to output terminals, shortest distance through air.
绝缘距离 Insulation Thickness	DTI	>0.5	mm	发射器和探测器之间的绝缘厚度 Insulation thickness between emitter and detector.
电痕指数 Comparative Tracking Index	CTI	≥600	V	IEC60112
峰值隔离电压 Peak Isolation Voltage	V_{IORM}	2262	V_{peak}	DIN/EN/IEC EN60747-5-5.
瞬态隔离电压 Transient Isolation Voltage	V_{IOTM}	12000	V_{peak}	DIN/EN/IEC EN60747-5-5.
隔离电压 Isolation Voltage	V_{ISO}	>7500	V_{rms}	For 1 min

极限参数 Absolute Maximum Ratings ($T_A=25^{\circ}C$)

参数 Parameter		符号 Symbol	额定值 Rating	单位 Unit
发射端 Input	正向电流 Forward Current	I_F	50	mA
	反向电压 Reverse Voltage	V_R	5	V
	输入功耗 Input Power Dissipation	P_I	100	mW
接收端 Output	电源电压 Supply Voltage	V_{CC}	7	V
	输出电流 Output Current	I_O	50	mA
	输出电压 Output Voltage	V_O	7	V
	输出集电极功耗 Output Collector Power Dissipation	P_O	85	mW
工作温度 Operating Temperature		T_{opr}	-40 to +125	$^{\circ}C$
存储温度 Storage Temperature		T_{stg}	-55 to +125	$^{\circ}C$
焊接温度 Soldering Temperature		T_{sol}	260	$^{\circ}C$

推荐工作条件 Recommended Operating Conditions

参数 Parameter	符号 Symbol	最小值 Min.	最大值 Max.	单位 Unit
高电平输入电流 Input Current , High level	I_{FH}	6	15	mA
电源电压 Supply Voltages	V_{CC}	2.7	5.5	V
输出上拉电阻 Output Pull-up Resistor	R_L	330	4k	Ω
操作温度 Operating Temperature	T_A	-40	+125	$^{\circ}C$

产品特性参数 Electro-optical Characteristics ($T_A=25^{\circ}C$)

参数 Parameter	符号 Symbol	条件 Condition	最小 Min.	典型 Typ.	最大 Max.	单位 Unit
发射端 Input	正向电压 Forward Voltage	V_F $I_F=10mA$	-	1.38	1.8	V
	反向击穿电压 Reverse Breakdown Voltage	BV_R $I_R=10\mu A$	5	50	-	V
	输入电容 Input Capacitance	C_{IN} $V=0, f=1 MHz$	-	70	-	pF
	正向电压的温度系数 Diode Temperature Coefficient	$\Delta V_F/\Delta T_A$ $I_F=10mA$	-	-1.9	-	mV/ $^{\circ}C$
接收端 Output	高电平电源电流 High Level Supply Current	I_{CCH} $I_F=0mA, V_{CC}=5.5V$ $V_O=Open$	-	6.0	9	mA
	低电平电源电流 Low Level Supply Current	I_{CCL} $I_F=10mA, V_{CC}=5.5V$ $V_O=Open$	-	8.0	10	mA
传输特性 Transfer Characteristics	高电平输出电流 High Level Output Current	I_{OH} $I_F=250\mu A$ $V_{CC}=V_O=5.5V$	-	2.1	30	μA
	低电平输出电压 Low Level Output Voltage	V_{OL} $I_F=5mA, V_{CC}=5.5V$ $I_{OL}=13mA$	-	0.3	0.6	V
	输入阈值电流 Input Threshold Current	I_{FT} $V_{CC}=5.5V, I_{OL}=13mA$ $V_O<0.6V$	-	1.4	5	mA
隔离电压 Isolation Voltage	V_{ISO}	$R_H<50\%$ $I_{I-O}\leq 50\mu A$	7500	-	-	V_{RMS}
隔离电阻 Isolation Resistance	R_{I-O}	$V_{I-O}=500V$	-	10^{12}	-	Ω
隔离电容 Isolation Capacitance	C_{I-O}	$V=0, f=1 MHz$	-	1.08	-	pF

开关特性 Switching Specification ($T_A=25^{\circ}\text{C}$)

参数 Parameter	符号 Symbol	条件 Condition	最小 Min.	典型 Typ.	最大 Max.	单位 Unit
输出高电平传播延迟 Propagation Delay Time to Output High Level	T_{PLH}	$I_F=7.5\text{mA}$ $V_{CC}=5.0\text{V}$ $C_L=15\text{pF}$ $R_L=350\Omega$	-	45	100	ns
输出低电平传播延迟 Propagation Delay Time to Output Low Level	T_{PHL}		-	30	100	ns
脉宽失真 ($ T_{PHL}-T_{PLH} $) Pulse Width Distortion ($ T_{PHL}-T_{PLH} $)	PWD		-	9	35	ns
输出上升时间(10% – 90%) Output Rise Time (10 to 90%)	t_r		-	40	-	ns
输出下降时间(90% - 10%) Output Fall Time (90 to 10%)	t_f		-	10	-	ns
传播延迟偏斜 Propagation Delay Skew	t_{PSK}		-	-	40	ns
输出高电平共模瞬态抑制 Common Mode Transient Immunity at Output High Level	$ CM_H $	$I_F=0\text{mA}$, $V_{CC}=5.0\text{V}$ $ V_{CM} =1000\text{V(Peak)}$ $V_{O(MIN)}=2.0\text{V}$, $R_L=350\Omega$	20	30	-	kV/ μs
输出低电平共模瞬态抑制 Common Mode Transient Immunity at Output Low Level	$ CM_L $	$I_F=7.5\text{mA}$, $V_{CC}=5.0\text{V}$ $ V_{CM} =1000\text{V(Peak)}$ $V_{O(MAX)}=0.8\text{V}$, $R_L=350\Omega$	20	30	-	kV/ μs

典型光电特性曲线 Typical Electro-Optical Characteristics Curves

Fig.1 Low-level output voltage vs. Ambient temperature

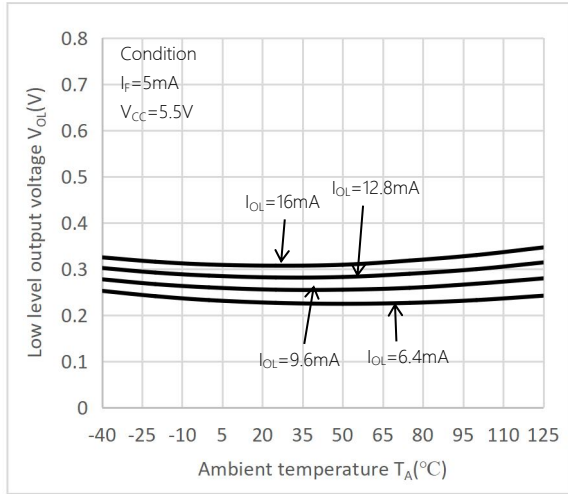


Fig.2 Forward current vs. Forward voltage

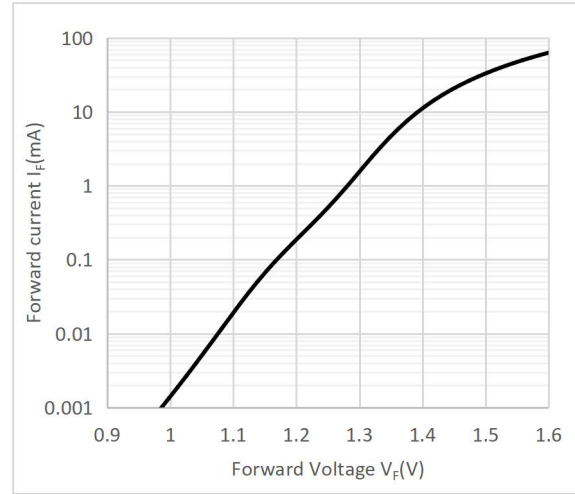


Fig.3 Propagation delay time vs. Forward current

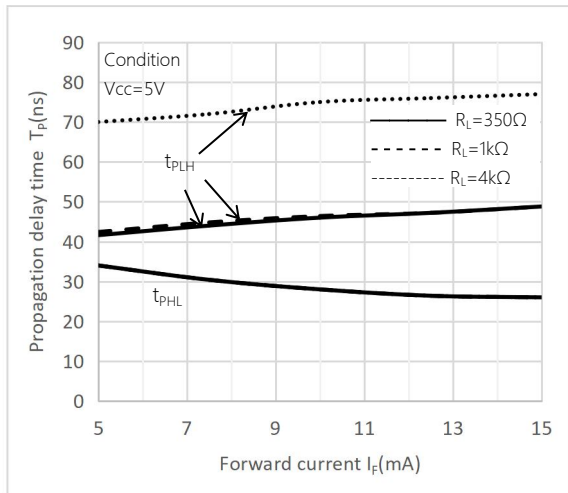


Fig.4 Low-level output current vs. Ambient temperature

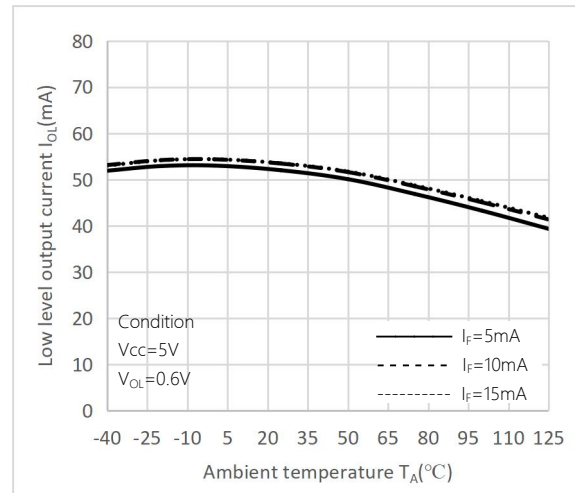


Fig.5 Input threshold current vs. Ambient temperature

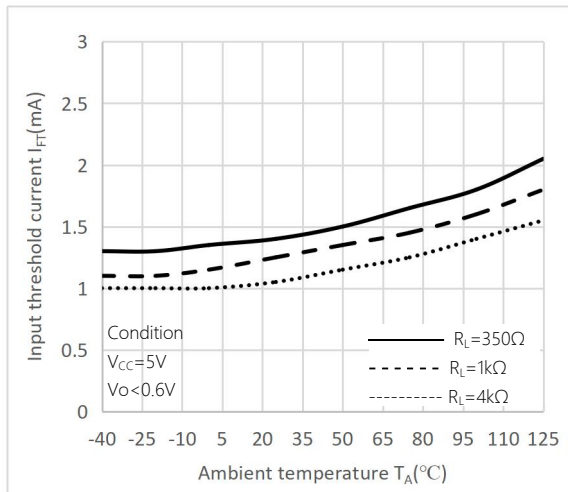


Fig.6 Output voltage vs. Forward current

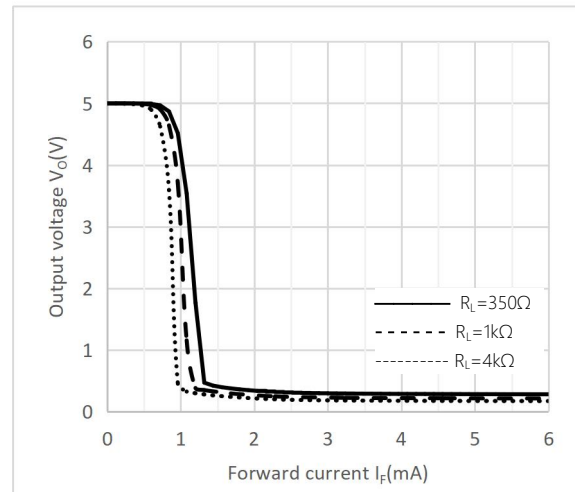


Fig.7 Pulse-width distortion vs. Ambient temperature

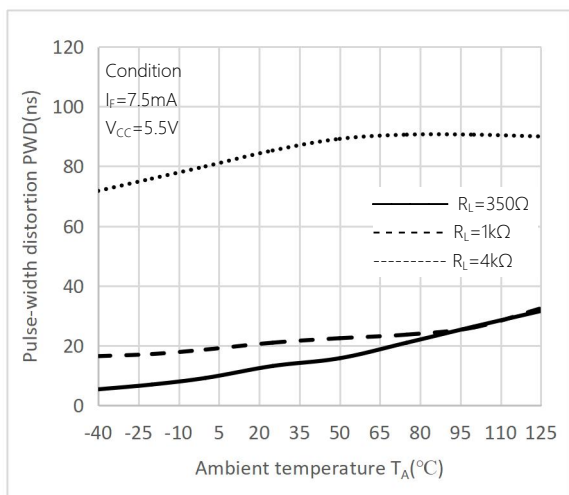


Fig.8 Switching time vs. Ambient temperature

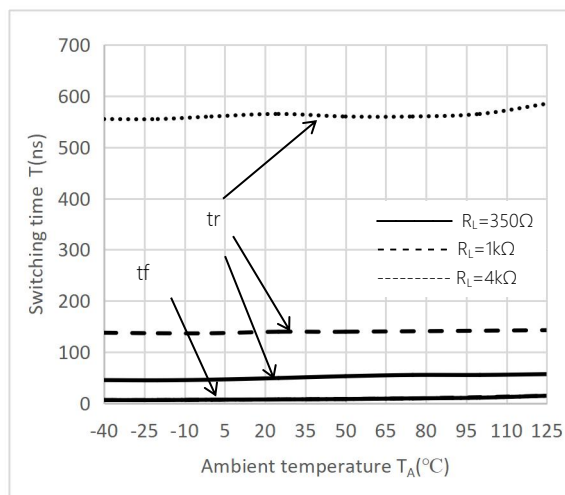


Fig.9 Propagation delay time vs. Ambient temperature



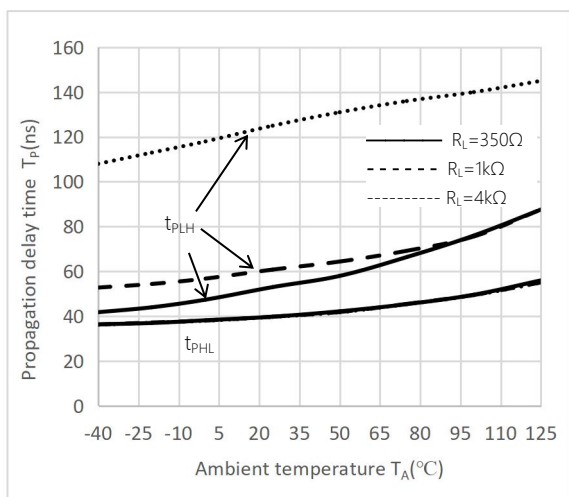



Fig.10 High-level output current vs. Ambient temperature

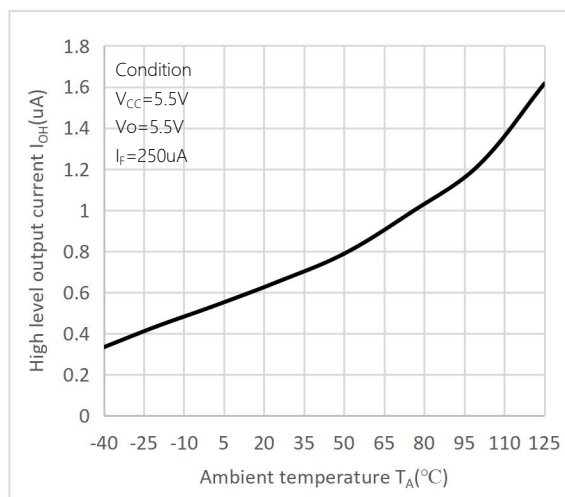

传输延迟时间测试电路 Test Circuit for Propagation Delay Time

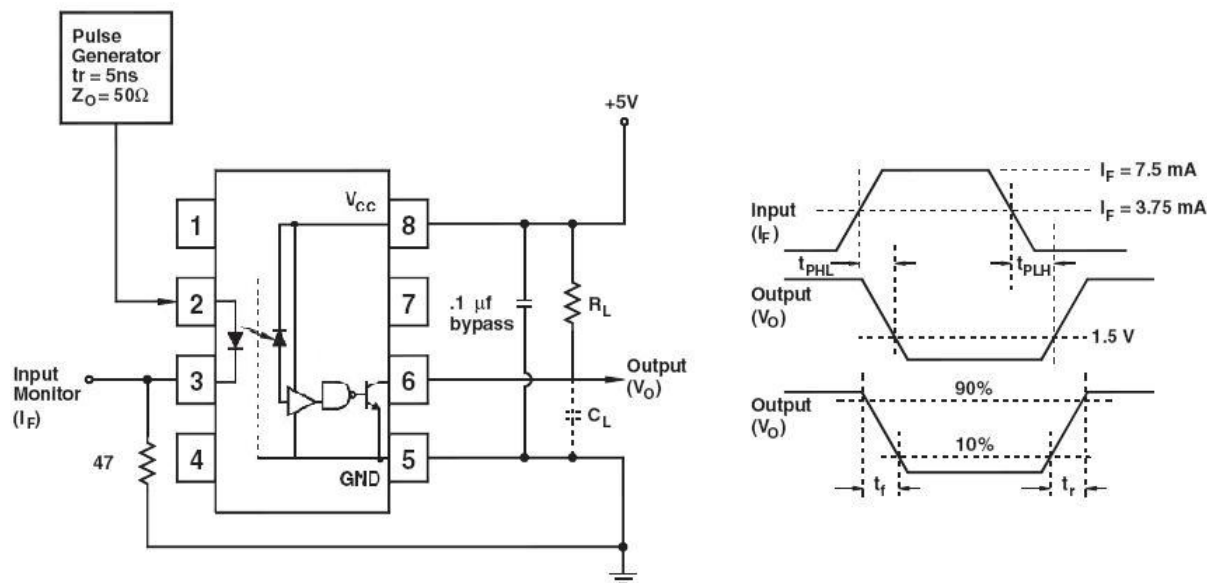


CMR 测试电路 Test Circuit for Common Mode Transient Immunity

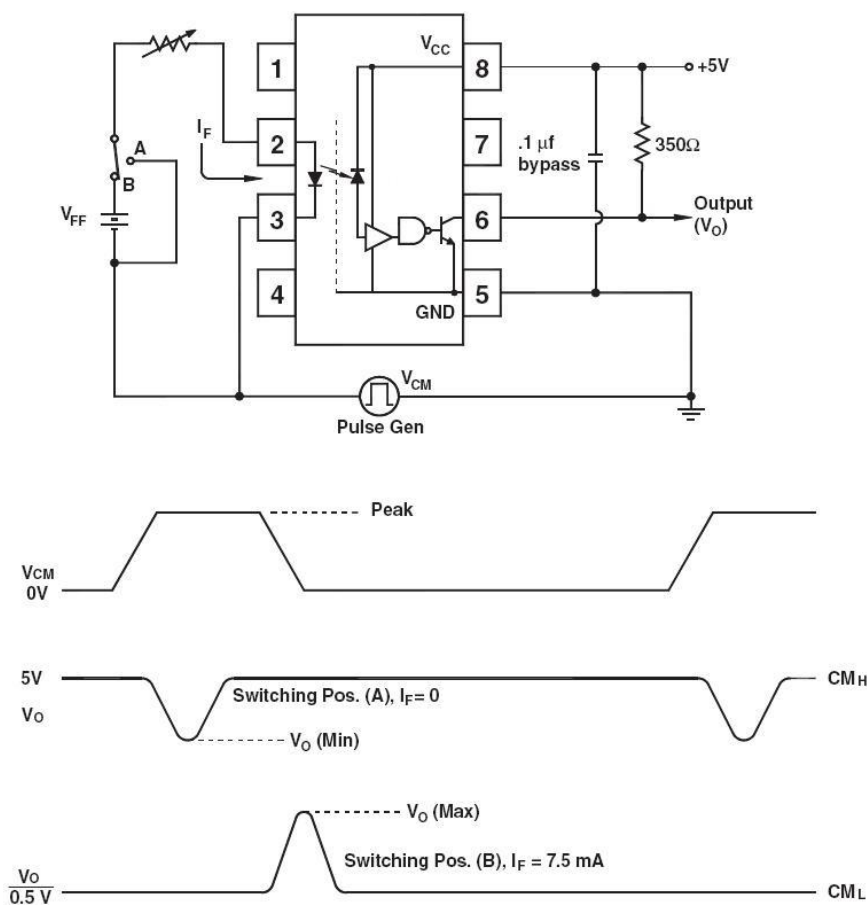


外形尺寸 Outline Dimensions

LSOP8

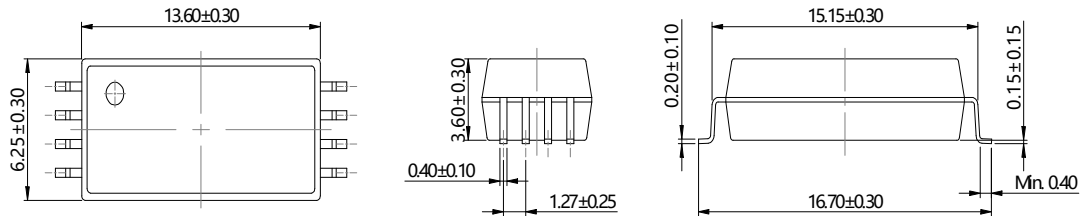

单位 Unit: mm

建议焊盘布局 Recommended Pad Layout

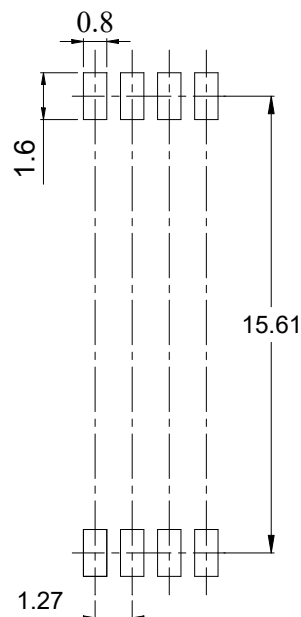


单位 Unit: mm

注：上图为产品正视图。

Note: The picture above is the front view of the product.

回流焊温度曲线图 Solder Reflow Profile

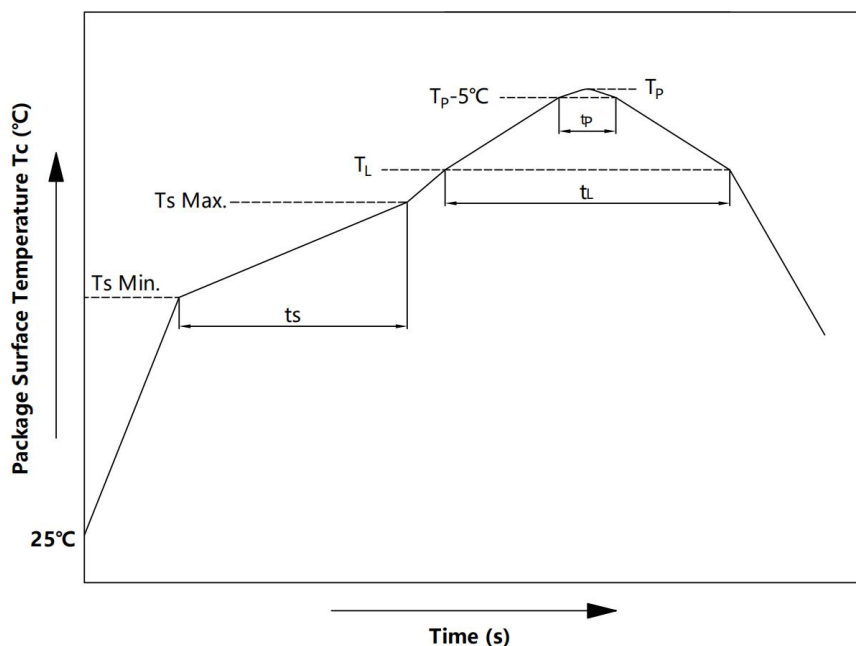


项目 Item	符号 Symbol	最小值 Min.	最大值 Max.	单位 Unit
预热温度 Preheat Temperature	T_s	150	200	$^\circ\text{C}$
预热时间 Preheat Time	t_s	60	120	s
升温速率 Ramp-Up Rate (T_L to T_p)	-	-	3	$^\circ\text{C/s}$
液相线温度 Liquidus Temperature	T_L	217		$^\circ\text{C}$
时间高于 T_L Time Above T_L	t_L	60	150	s
峰值温度 Peak Temperature	T_p	-	260	$^\circ\text{C}$
T_c 在 $(T_p - 5)$ 和 T_p 之间的时间 Time During Which T_c Is Between $(T_p - 5)$ and T_p	t_p	-	30	s
降温速率 Ramp-down Rate (T_p to T_L)	-	-	6	$^\circ\text{C/s}$

注 Note:

建议在所示的温度和时间条件下进行回流焊，最多不能超过三次；

Reflow soldering is recommended at the temperatures and times shown, no more than three times;

波峰焊温度曲线图 Wave Soldering Profile

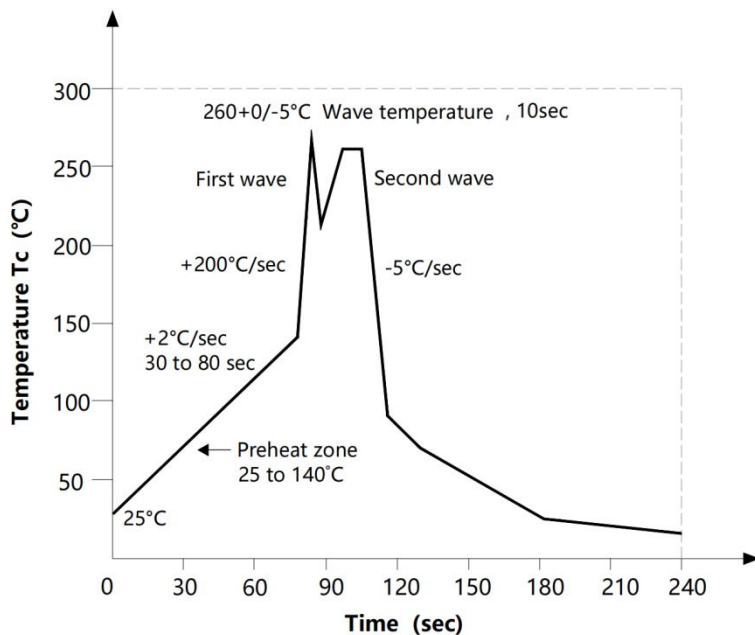

手工烙铁焊接 Soldering with hand soldering iron

A. 手工烙铁焊仅用于产品返修或样品测试;

Hand soldering iron is only used for product rework or sample testing;

B. 手工烙铁焊要求: 温度 $360^{\circ}\text{C} \pm 5^{\circ}\text{C}$, 时间 $\leq 3\text{s}$ 。

Hand soldering iron requirements: Temperature: $360^{\circ}\text{C} \pm 5^{\circ}\text{C}$, within 3s.


包装 Packing

■ 汇总表 Summary table

封装形式	包装方式	盘数量	盒数量	箱数量	静电袋规格	盒规格	箱(双瓦楞)规格	备注
LSOP8	卷盘 ($\phi 330$ mm 蓝盘)	800 只/盘	2 盘/盒	8 盒/箱	450*390*0.1mm	353*340*75mm	650*375*365mm	首端各空 50 个空格, 末端空 100
Package Type	Packing Form	Quantity per Reel	Quantity per Box	Quantity per Carton	Antistatic Bag Specification	Box Specification	Carton Specification	Note
LSOP8	Tube ($\phi 330$ mm Blue)	800 pcs/reel	2 reels /box	8 boxes /ctn	450*390*0.1mm	353*340*75mm	650*375*365mm	Leave 50 spaces at the beginning and 100 spaces at the end

■ 编带包装 Tape & Reel

- 1) 每卷数量: 800 只。
Qty/reel: 800pcs.
- 2) 每箱数量: 12800 只。
Qty/ctn: 12800pcs.
- 3) 内包装: 每盒 2 盘。
Inner packing: 2 reels/box.
- 4) 示意图 Schematic:

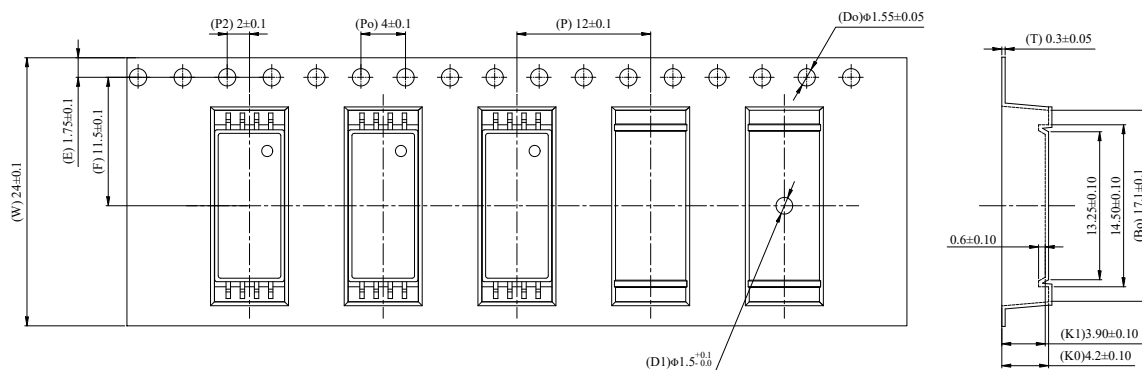

单位 Unit: mm

注意 Attention

- 群芯持续不断改进质量、可靠性、功能或设计，保留此产品更改的权利恕不另行通知。
QUNXIN continuously improve quality, reliability, function and design. We reserve the right to change this product without prior notice.
- 请遵守产品规格书使用，群芯不对使用时不符合产品规格书条件而导致的质量问题负责。
Please use in accordance with the product specification. QUNXIN is not responsible for the quality problems caused by non-compliance with the product specifications.
- 对于需要高可靠性或安全性的设备/装置需求，请联系我们的销售人员。
For equipment/devices requiring high reliability or safety, please contact our sales representatives.
- 当需要用于任何“特定”应用时，请咨询我们的销售人员。
When requiring a device for any “specific” application, please contact our sales in advice.
- 如对文件中表述的内容有疑问，欢迎联系我们。
If you have any questions about the contents of the document, please contact us.