
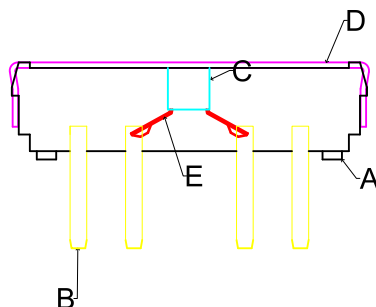


额定电压: DC12v 50mA
绝缘电阻: 100mΩ min(DC100V)
耐压强度: AC100V(50\60Hz for 1minute)
使用温度: -10~60℃
操作力度: 200±100g
寿命: 10,000

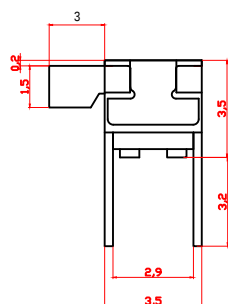

Technical drawing of a mechanical part with dimensions. The part has a total length of 12.8 and a total width of 6.4. The top edge features a central rectangular protrusion with a width of 1.5. The bottom edge has four rectangular cutouts, each with a width of 1.2. The dimensions are as follows:

- Total length: 12.8
- Total width: 6.4
- Top protrusion width: 1.5
- Bottom cutout width: 1.2
- Distance between cutouts: 2.4
- Distance from left edge to first cutout: 2.4
- Distance from last cutout to right edge: 2.4

手柄高度
H=1.5
H=2
H=3
H=4

E	弹片	镀银磷青铜	2	白色
D	盖板	不锈钢	1	白色
C	手柄	PPA	1	黑色
B	卡件	H65黄铜镀银	1	白色
A	基座	PAA\LCP	1	黑色
序号	结构	材 料	数量	备 注

标记	处数	更改文件名	签 名	日期	阶段标记	重量	比例	
							4: 1	MSK23D18G3
设 计			标 准 化					拨动开关
审 核			批 准				深圳市逸致电子有限公司 Shenzhen Yizhi Electronics Co., LTD	
校 对			工 艺					