

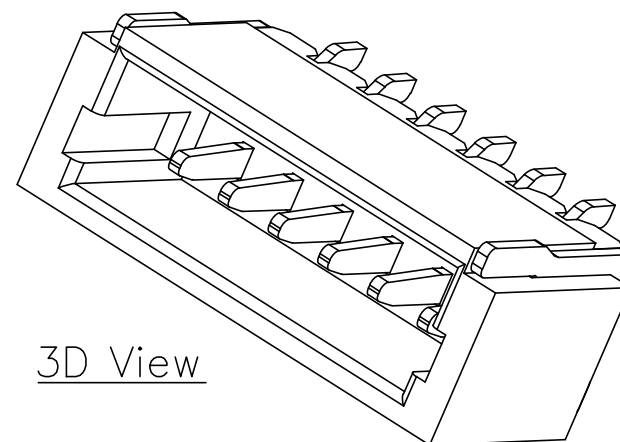
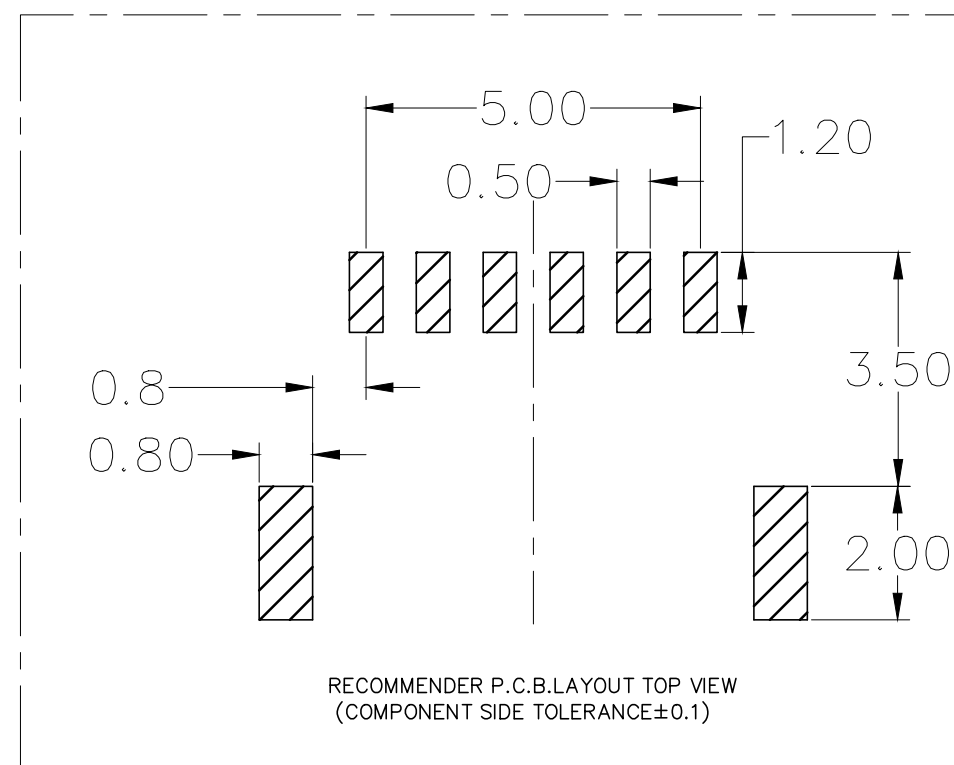



PIN 数	A±0.1	B±0.1	C±0.1
2P	4.30	1.00	3.25
3P	5.30	2.00	4.25
4P	6.30	3.00	5.25
5P	7.30	4.00	6.25
6P	8.30	5.00	7.25

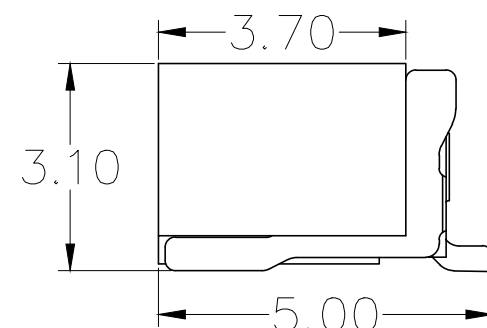

Technical drawing of a rectangular plate. The overall width is labeled $A = 8.30$. The overall height is labeled 2.50 . The inner rectangular area, defined by a double-line border, has a width of 6.65 and a height of 2.10 . Inside this inner area, there is a grid of 12 small rectangular holes arranged in 2 rows and 6 columns. The drawing uses double lines for the inner boundary and single lines for the outer boundary.

1. Rated Voltage : 50V AC/DC
2. Rated Current : 1A AC,DC
3. Withstand Voltage : 200V AC/minute
4. Contact Resistance : 50mΩ(MAX.)
5. Insulation Resistance : 100MΩ(MIN.)
6. Storage Temperature Range: -40°C~+85°C;
7. Operation Temperature Range: -25°C~+70°C;

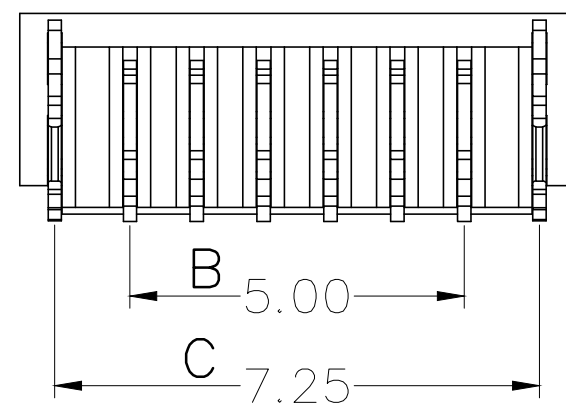

	深圳市虹成电子有限公司		品 名 TITLE	针座	
			料 号 PART NO	HCZZ0032-6	
UNLESS OTHERWISE, GENERAL TOLERANCE:		比 列 SCALE	1 : 1		
X. xxx ±0.05 X. xx ±0.15 X. x ±0.25 ANGULAR: X. xx° ±1° X. x° ±3° X. ° +5°		单 位 UNIT	MM	制 图 DRAW	AhYe
		张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云
		版 本 REV	A	批 准 APPROVE	赵亮亮
					