

## M1F (M1) THRU M7F (M7)

### Surface Mount General Purpose Rectifier

#### Essential information; basic information

##### Features


- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

##### Typical Applications

For use in general purpose rectification of power supplies, inverters, converters, and freewheeling diodes for consumer, and telecommunication.

##### Mechanical Data

- Package: SMAF-L
- Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102
  - Polarity: Cathode line denotes the cathode end

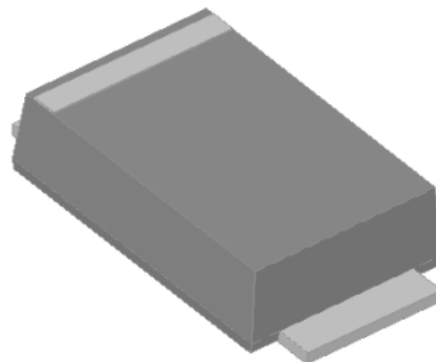

#### Maximum Ratings (Ta=25°C Unless otherwise specified)


| PARAMETER                                                                      | SYMBOL         | UNIT | M1F        | M2F | M3F | M4F | M5F | M6F | M7F  |
|--------------------------------------------------------------------------------|----------------|------|------------|-----|-----|-----|-----|-----|------|
| Alternate Name                                                                 |                |      | M1         | M2  | M3  | M4  | M5  | M6  | M7   |
| Maximum Repetitive peak reverse voltage                                        | VRRM           | V    | 50         | 100 | 200 | 400 | 600 | 800 | 1000 |
| Maximum RMS Voltage                                                            | VRMS           | V    | 35         | 70  | 140 | 280 | 420 | 560 | 700  |
| Maximum DC Blocking Voltage                                                    | VDC            | V    | 50         | 100 | 200 | 400 | 600 | 800 | 1000 |
| Average Rectified Output Current @ 60Hz sine wave, resistance load, TL (Fig.1) | IO             | A    | 1.0        |     |     |     |     |     |      |
| Forward Surge Current (Non-repetitive) @ 60Hz Half-sine wave, 1 cycle, Tj=25°C | IFSM           | A    | 25         |     |     |     |     |     |      |
| Storage temperature                                                            | Tstg           | °C   | -55 ~ +150 |     |     |     |     |     |      |
| Junction temperature                                                           | Tj             | °C   | -55 ~ +150 |     |     |     |     |     |      |
| Maximum instantaneous forward voltage drop per diode                           | VF (IFM=1.0A)  | V    | 1.1        |     |     |     |     |     |      |
| Maximum DC reverse current at rated DC blocking voltage per diode              | IR (Tj =25°C)  | μ A  | 5          |     |     |     |     |     |      |
|                                                                                | IR (Tj =125°C) |      | 100        |     |     |     |     |     |      |

### Thermal Characteristics (Ta=25℃ Unless otherwise specified)

| PARAMETER                  | SYMBOL               | UNIT | M1F | M2F | M3F | M4F | M5F | M6F | M7F |
|----------------------------|----------------------|------|-----|-----|-----|-----|-----|-----|-----|
| Alternate Name             |                      |      | M1  | M2  | M3  | M4  | M5  | M6  | M7  |
| Typical Thermal resistance | RθJ-A <sup>(1)</sup> | ℃/W  | 70  |     |     |     |     |     |     |
|                            | RθJ-L <sup>(1)</sup> |      | 25  |     |     |     |     |     |     |
|                            | RθJ-C <sup>(1)</sup> |      | 20  |     |     |     |     |     |     |

Note:(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas


### Characteristics (Typical)

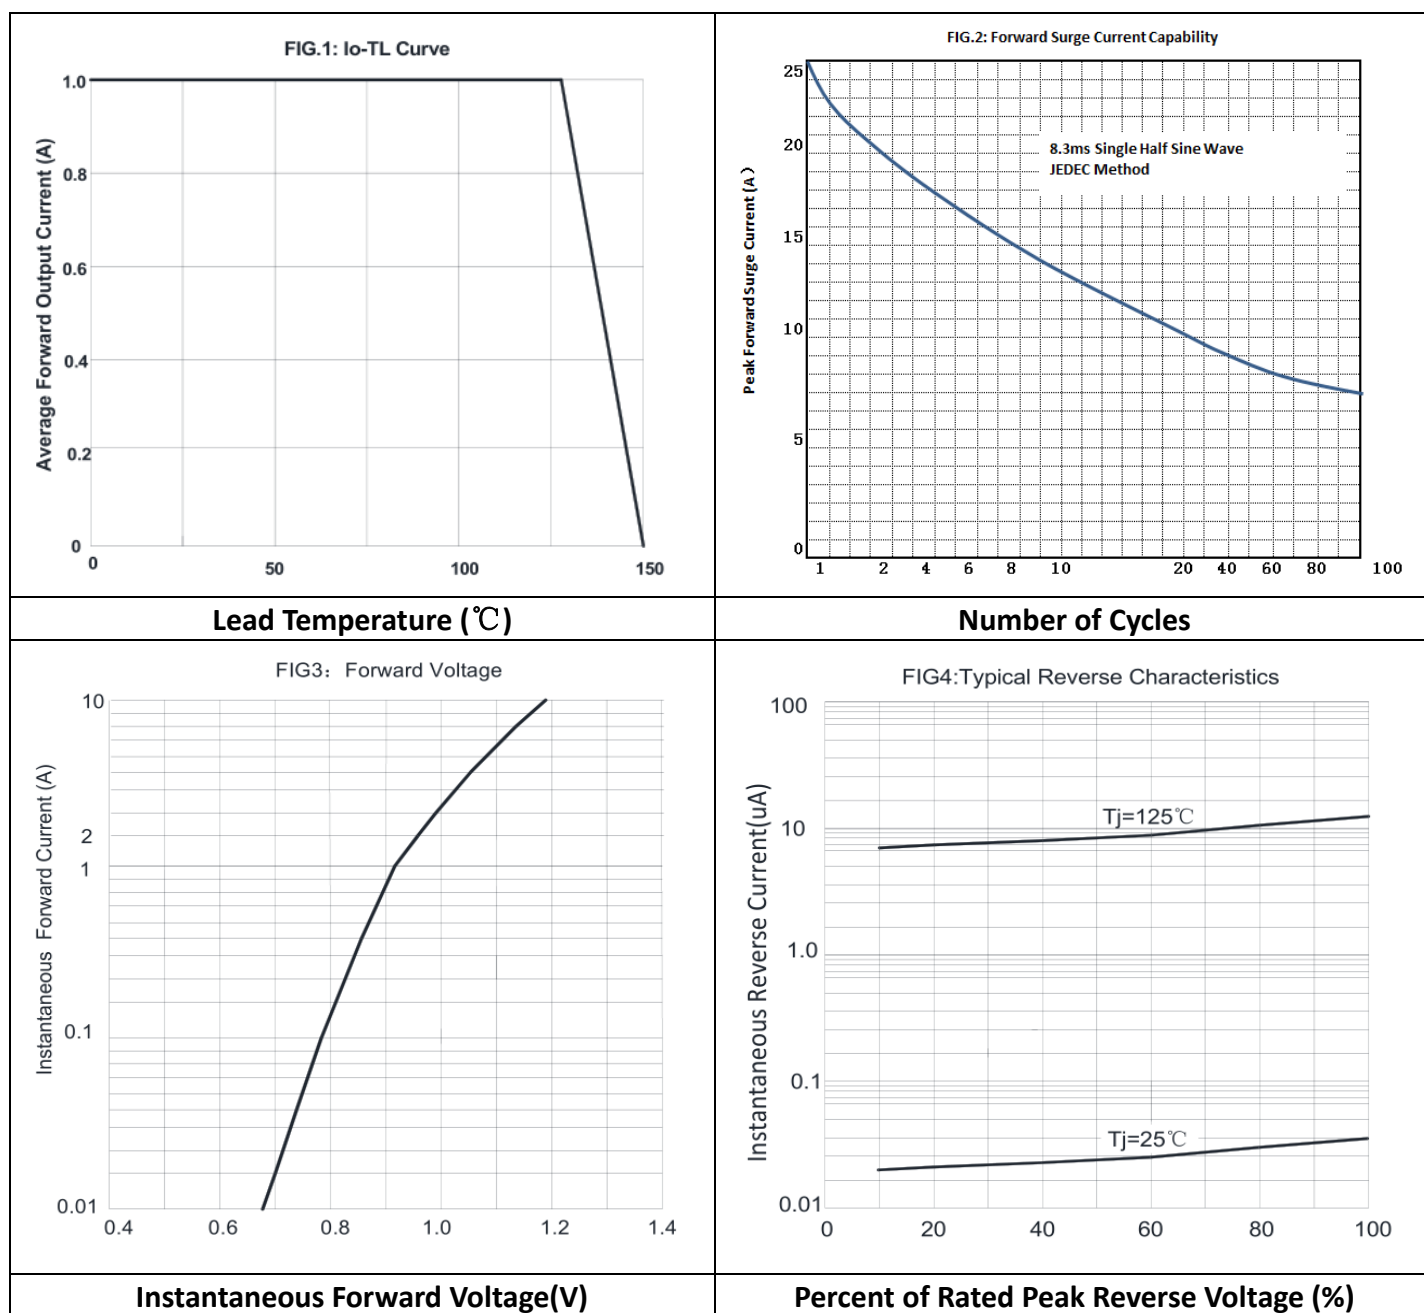

### Ordering Information (Example)

| type specification           | manner of packin | MINIMUM PACKAGE(pcs) | INNER BOX QUANTITY(pcs) | OUTER CARTON QUANTITY(pcs) | DELIVERY MODE |
|------------------------------|------------------|----------------------|-------------------------|----------------------------|---------------|
| M1F-M7F<br>M1-M7<br>(SMAF-L) | T/B              | 3000                 | 18000                   | 180000                     | 7" reel       |
|                              |                  | 3000                 | 21000                   | 210000                     | 7" reel       |
|                              |                  | 3000                 | 24000                   | 240000                     | 7" reel       |
|                              |                  | 5000                 | 10000                   | 100000                     | 11" reel      |
|                              |                  | 10000                | 20000                   | 200000                     | 13" reel      |

### Outline Dimensions

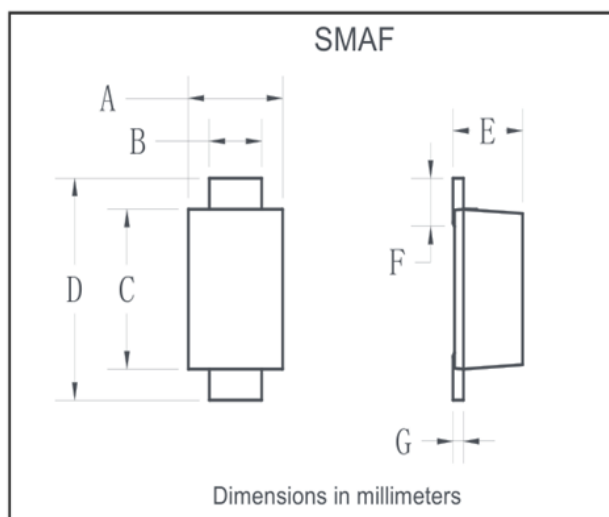

| SMAF |      |      |
|------|------|------|
| Dim  | Min  | Max  |
| A    | 2.30 | 2.80 |
| B    | 1.25 | 1.45 |
| C    | 3.40 | 3.60 |
| D    | 4.20 | 4.80 |
| E    | 0.95 | 1.25 |
| F    | 0.40 | 1.00 |
| G    | 0.10 | 0.20 |

### Disclaimer

The information presented in this document is for reference only. right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Chenglitai or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use or sale.

This publication supersedes & replaces all information previously supplied. or consult your nearest Chenglitai's sales office for further assistance.