


SOD-523

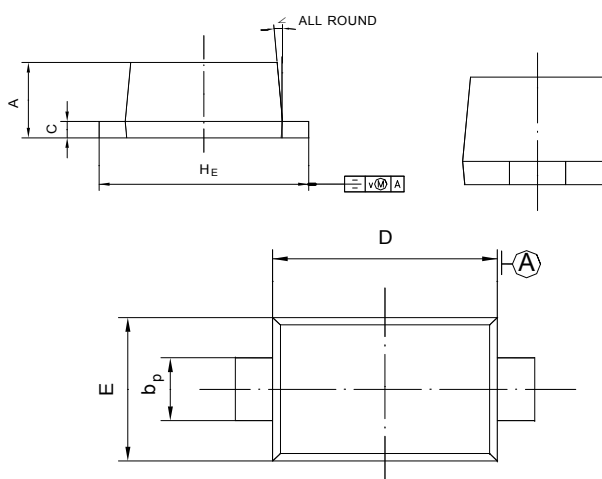

UNIT	A	b _p	C	D	E	H _E	V	∠
mm	0.70 0.50	0.40 0.20	0.14 0.05	1.30 1.10	0.90 0.75	1.70 1.50	0.1	5°

Dimensions in inches and (millimeters)

FEATURES

- High breakdown voltage
- Low turn-on voltage
- Guard ring construction for transient protection

MARKING: S9

Maximum Ratings @T_a=25°C

Parameter	Symbol	Limit	Unit
Peak repetitive peak reverse voltage	V _{RRM}	100	V
Working peak reverse voltage	V _{RWM}		
Forward continuous current	I _F	150	mA
Repetitive peak forward current (Note 1) @ t _p < 1.0s, Duty Cycle < 50%	I _{FRM}	350	mA
Non-repetitive Peak Forward surge current @ t = 8.3ms	I _{FSM}	750	mA
Power dissipation	P _D	500	mW
Thermal resistance junction to ambient air	R _{θJA}	200	°C/W
Junction temperature	T _j	125	°C
Storage temperature	T _{STG}	-55~+150	°C

BAT46X

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse breakdown voltage(Note 2)	V_R	$I_R = 100\mu A$	100			V
Reverse voltage leakage current	I_R	$V_{R1} = 1.5V$			0.3	μA
		$V_{R2} = 10V$			0.5	
		$V_{R3} = 50V$			1	
		$V_{R4} = 75V$			2	
Forward voltage(Note 2)	V_F	$I_{F1} = 0.1mA$			0.30	V
		$I_{F2} = 10mA$			0.45	
		$I_{F3} = 250mA$			1	
Diode capacitance	C_T	$V_R = 0, f = 1MHz$		20		pF
		$V_R = 1V, f = 1MHz$		12		

Notes: 1. Part mounted on FR-4 board with recommended pad layout.


2. Short duration pulse test used to minimize self-heating effect.

RATING AND VCHARACTERISTIC CURVES(BAT46X)


Forward Characteristics

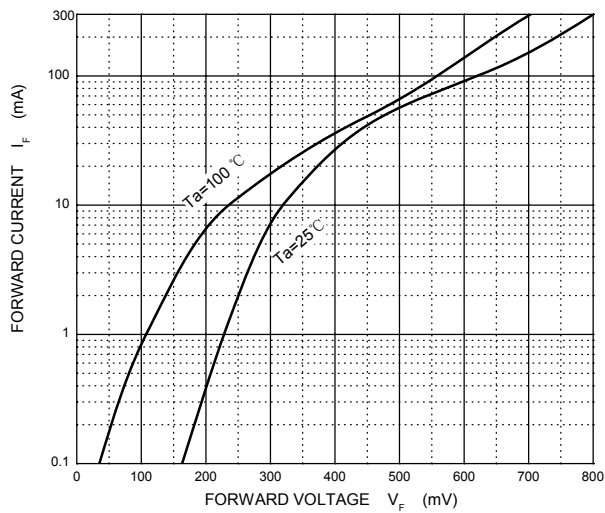

Reverse Characteristics

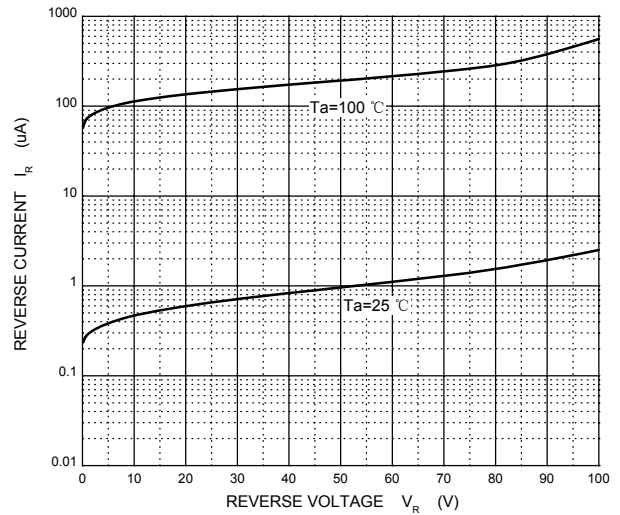

Capacitance Characteristics

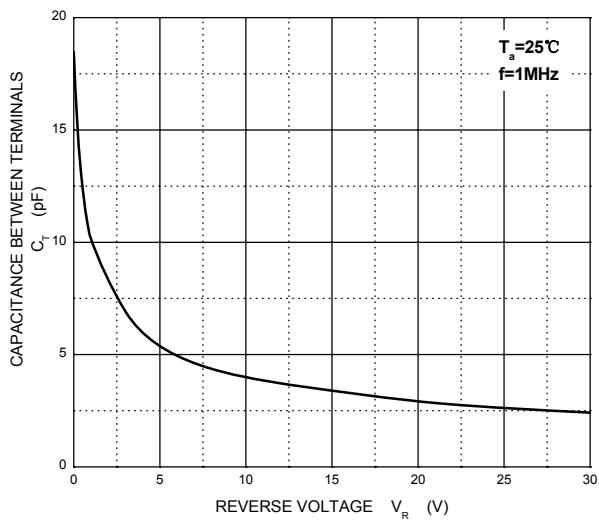

Power Derating Curve

