© 2024 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-25-245161	21MAR2025	F.F	G.F

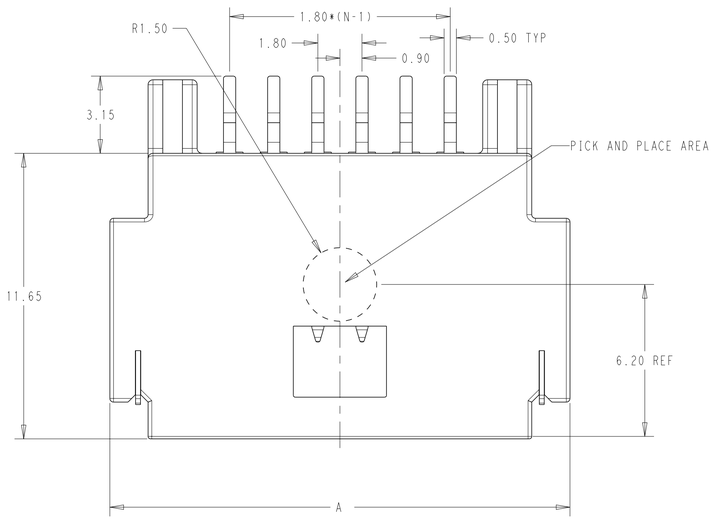

NOTES :

1. MATERIAL:
   HOUSING:HIGH TEMPERATURE THERMO PLASTIC.
   PIN: COPPER ALLOY.
   SOLDER NAIL: SUS.
2. FINISH:
   PIN: TIN PLATING OVER NICKEL PLATING OVERALL.
   SOLDER NAIL: TIN PLATING OVER NICKEL PLATING OVERALL.
3. PACKAGED IN TAPE AND REEL INSIDE OF CARTON.

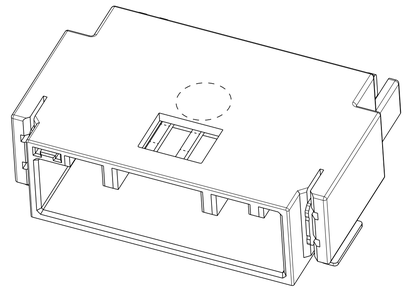

2834659-6 AS SHOWN

1-2834659-0	1-2834674-0	10	25.97
2834659-6	2834674-6	6	18.77
2834659-2	2834674-2	2	11.57
BLACK COLOR,X KEY	NATURAL COLOR,X KEY	Position	Dimension A

1-2834682-0	1-2834684-0	10	25.97
2834682-6	2834684-6	6	18.77
2834682-2	2834684-2	2	11.57
BLACK COLOR,Y KEY	NATURAL COLOR,Y KEY	Position	Dimension A

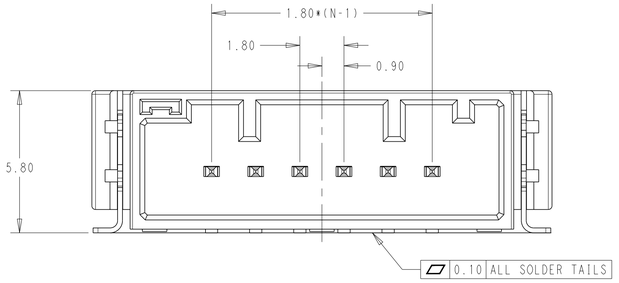

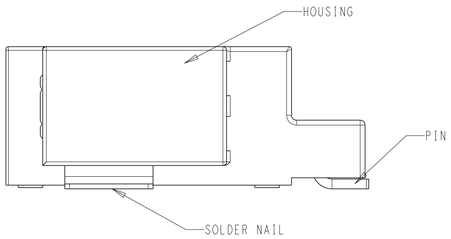

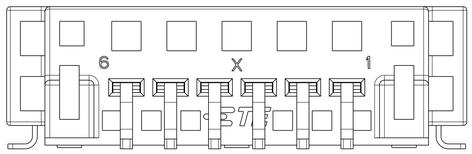

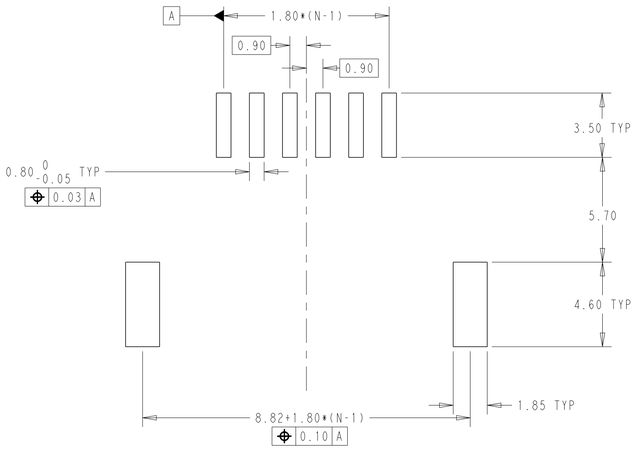

RECOMMEND PCB LAYOUT
TOLERANCE:±0.05mm

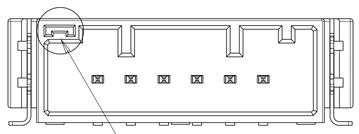

2834659-6,X KEY



2834659-6,Y KEY

THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN FRANK FAN 23JAN2024	TE Connectivity	
DIMENSIONS: mm	CHK GEORGE FU 23JAN2024	NAME DYNAMIC ULTRA 1.80MM PITCH SMT TYPE	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±0.25 3 PLC ±- 4 PLC ±- ANGLES ±-	APVD MING SHI 23JAN2024		
	PRODUCT SPEC 108-137690		
	APPLICATION SPEC 114-137708	SIZE A1 / CAGE CODE 00779 / DRAWING NO C-2834659	RESTRICTED TO -
MATERIAL - -	WEIGHT - / FINISH - -		
	CUSTOMER DRAWING	SCALE 5:1 / SHEET 1 OF 1	REV B

4805 (3/13)