# 5.0 x 2.2 x 1.0 (mm) WiFi / Bluetooth Chip Antenna (CW503)

# **Engineering Specification**

#### 1. Product Number

| H | 2 | U | 3 | 6 | F | 1 | K | 1 | B | 0 | 3 | 0 | 0



#### 2. Features

- \*Stable and reliable in performances
- \*Low profile, compact size
- \*RoHS compliance
- \*SMT processes compatible

# 3. Applications

- \*ISM 2.4 GHz applications
- \*ZigBee/BLE applications
- \*Bluetooth earphone systems
- \*Hand-held devices when WiFi / Bluetooth functions are needed, e.g., Smart phones
- \*IEEE802.11 b/g/n
- \*Wireless PCMCIA cards or USB dongles

# 4. Description

Unictron's CW503 chip antenna is designed for ISM 2.4GHz applications, covering frequencies 2400~2500MHz. Fabricated with proprietary design and processes, CW503 shows excellent performance and is fully compatible with SWT processes which can decrease the assembly cost and improve device's quality and consistency.

Document



#### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Mina Designed by : Peter Checked by : Mike Approved by : Herbert

TITLE: 5.0 x 2.2 x 1.0 (mm) WiFi Band Chip
Antenna(CW503) Engineering Specification

DOCUMENT
NO.

H2U36F1K1B0300
C


PAGE 1 OF 10

# 5. Layout Guide & Electrical Specifications

5-1. Layout Guide (unit: mm)

Solder Land Pattern:

The solder land pattern (gold marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

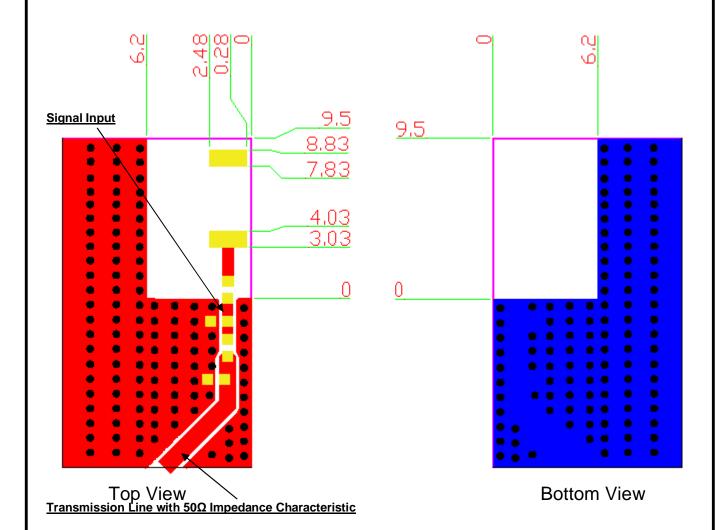

Unictron Technologies Corp.

2019-03-18

Document



# 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Mina Designed by : Peter Checked by : Mike Approved by : Herbert

TITLE: 5.0 x 2.2 x 1.0 (mm) WiFi Band Chip
Antenna(CW503) Engineering Specification
NO.

H2U36F1K1B0300


REV.

# 5-2. Electrical Specifications (Evaluation Board Dimensions: 40 x 40 mm<sup>2</sup>) 5-2-1. Electrical Table (2400~2500 MHz Band)

| Characteristics            |                   | Specifications      | Unit |
|----------------------------|-------------------|---------------------|------|
| Outline Dimensions         |                   | 5.0 x 2.2 x 1.0     | mm   |
| Ground Plane Dimensions    |                   | 40 x 40             | mm   |
| Working Frequency          |                   | 2400~ 2500          | MHz  |
| VSWR (@ center frequency)* |                   | 1.2Max              |      |
| Characteristic Impedance   |                   | 50                  | Ω    |
| Polarization               |                   | Linear Polarization |      |
| Peak Gain                  | (@2442 MHz)       | 1.9(typical**)      |      |
| Efficiency                 | ( © 2442 IVII IZ) | 62.3(typical**)     | %    |

<sup>\*</sup>Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board.

#### 5-2-2. Frequency vs. V.S.W.R. and Total Radiation Gain

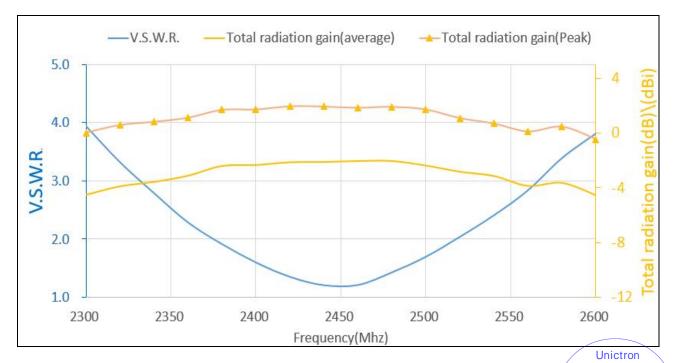

Technologies Corp.

2019-03-18

Document

Unictron
Technologies Corp.

# 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


Prepared by: Mina Designed by: Peter Checked by: Mike Approved by: Herbert

TITLE: 5.0 x 2.2 x 1.0 (mm) WiFi Band Chip
Antenna(CW503) Engineering Specification


DOCUMENT
NO.

H2U36F1K1B0300
C

<sup>\*\*</sup>A typical value is for reference only, not guaranteed.

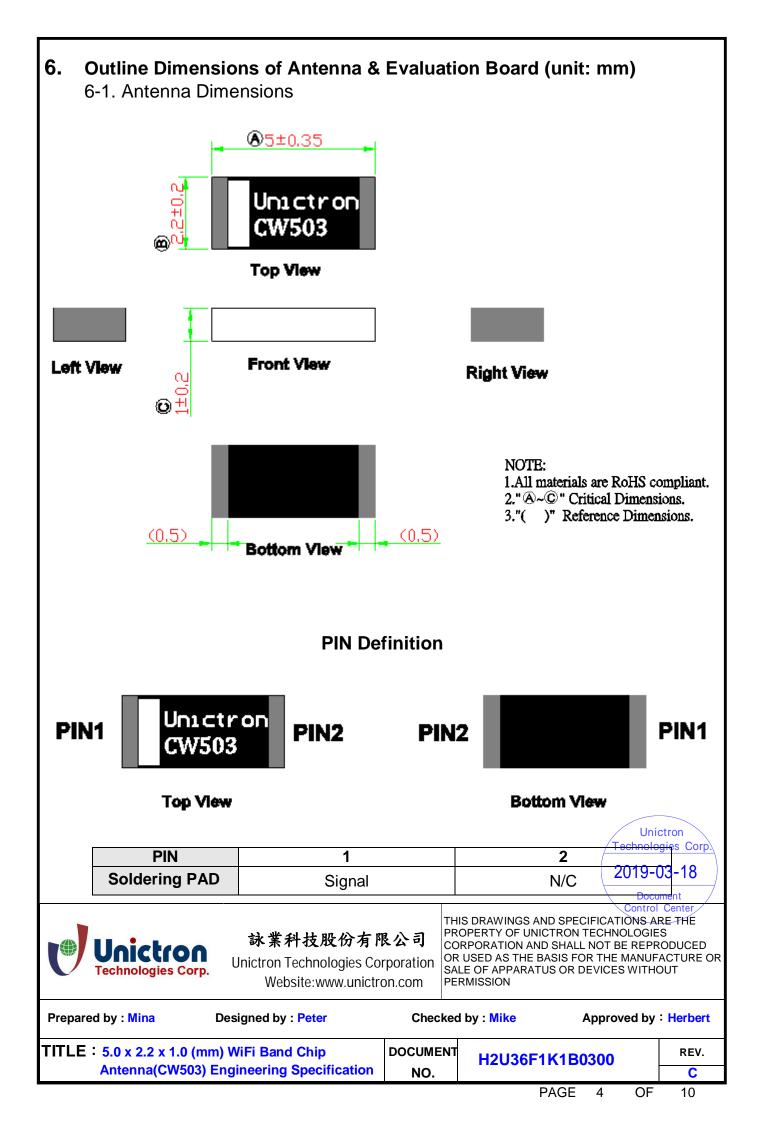

#### 6-2. Evaluation Board with Antenna

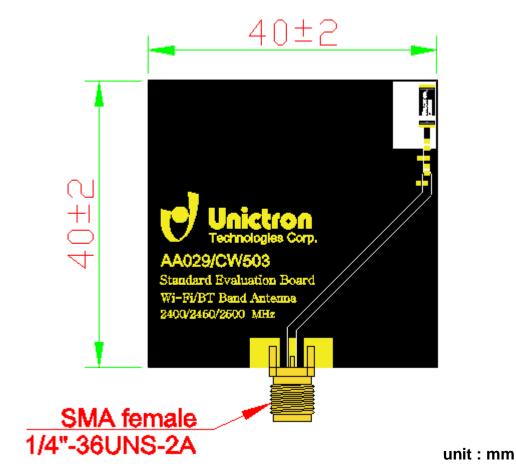

Unictron
Technologies Corp.

2019-03-18

Document



# 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Mina Designed by: Peter Checked by: Mike Approved by: Herbert

TITLE: 5.0 x 2.2 x 1.0 (mm) WiFi Band Chip
Antenna(CW503) Engineering Specification

DOCUMENT NO.


H2U36F1K1B0300


REV.


PAGE 5 OF 10

# 7. 3D Radiation Gain Pattern (with 40 x 40 mm<sup>2</sup> Evaluation Board)

3D Radiation Gain Pattern @ 2450 MHz (unit: dBi)

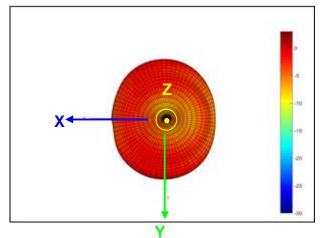

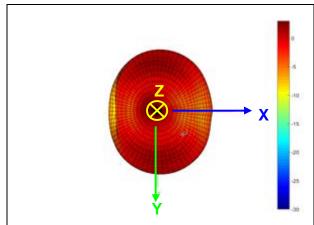

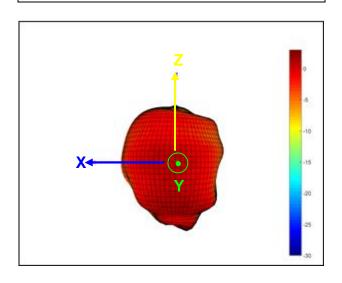





# 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Mina Designed by : Peter Checked by : Mike Approved by : Herbert

TITLE: 5.0 x 2.2 x 1.0 (mm) WiFi Band Chip
Antenna(CW503) Engineering Specification


DOCUMENT
NO.

H2U36F1K1B0300
C


PAGE 6 OF 10

# 8. Frequency tuning and Matching circuit

#### 8-1. Chip antenna tuning scenario:

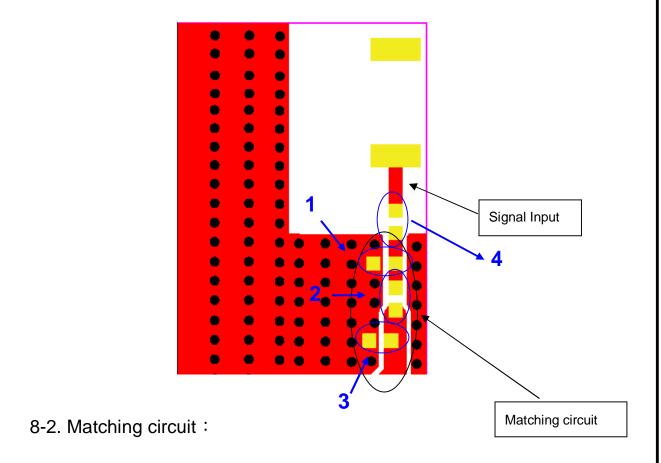

With the following recommended values of matching and tuning components, the center frequencies will be about 2450 MHz at our standard 40x40 mm<sup>2</sup> evaluation board. However, these are reference values, may need to be changed when the circuit boards or part vendors are different.



| System Matching Circuit Component |               |        |            |          |
|-----------------------------------|---------------|--------|------------|----------|
| Location                          | Description   | Vendor | Tolerance  |          |
| 1                                 | N/A*          | -      | -          |          |
| 2                                 | 3.3nH, (0402) | DARFON | ±0.1nH     | on       |
| 3                                 | 1.5pF, (0402) | MURATA | ±0;4ppFogi | es Corp. |
| 4                                 | 0Ω, (0402)    | -      | 2019-03    | -18      |

Document



# 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Mina Designed by : Peter Checked by : Mike Approved by : Herbert


TITLE: 5.0 x 2.2 x 1.0 (mm) WiFi Band Chip
Antenna(CW503) Engineering Specification

DOCUMENT
NO.

H2U36F1K1B0300
C

### 9. Soldering Conditions

Typical Soldering Profile for Lead-free Process

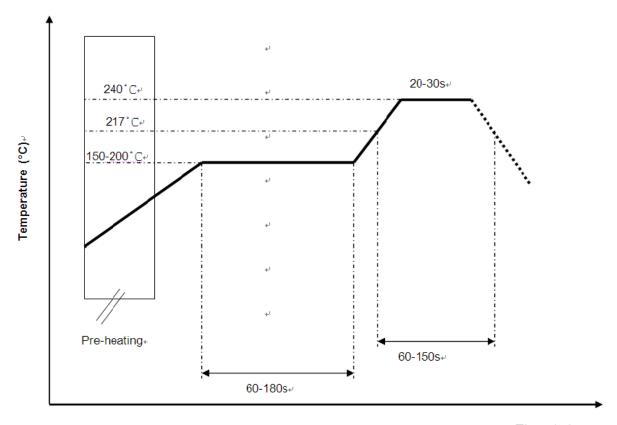

Time (s.)₽

Unictron
Technologies Corp.

2019-03-18

Document Control Cont



# 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Mina Designed by : Peter Checked by : Mike Approved by : Herbert

TITLE: 5.0 x 2.2 x 1.0 (mm) WiFi Band Chip
Antenna(CW503) Engineering Specification

DOCUMENT NO.

H2U36F1K1B0300

REV.


PAGE 8 OF 10

<sup>\*</sup>Recommended solder paste alloy: SAC305 (Sn96.5 /Ag3 /Cu0.5) Lead Free solder paste

#### 10. Packing

- (1) Quantity/Reel: 5000 pcs/Reel
- (2) Plastic tape: Black conductive polystyrene

#### a. Tape Drawing

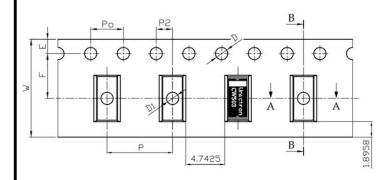

#### b. Tape Dimensions (unit: mm)

| Feature | Specifications | Tolerances |  |  |
|---------|----------------|------------|--|--|
| W       | 12.00          | ±0.30      |  |  |
| Р       | 8.00           | ±0.10      |  |  |
| Е       | 1.75           | ±0.10      |  |  |
| F       | 5.50           | ±0.10      |  |  |
| P2      | 2.00           | ±0.10      |  |  |
| D       | 1.50           | +0.10      |  |  |
|         | 1.50           | -0.00      |  |  |
| Po      | 4.00           | ±0.10      |  |  |
| D1      | 1.50           | ±0.10      |  |  |
| 10Po    | 40.00          | ±0.20      |  |  |

### 11. Operating & Storage Conditions

#### 11-1. Operating

- (1) Maximum Input Power: 2 W
- (2) Operating Temperature: -40°C to 85°C
- (3) Relative Humidity: 10% to 70%

#### 11-2. Storage (sealed)

- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

#### 11-3. Storage (unsealed)

Meet the criteria of <u>J-STD-033 MSL2a</u>

# 11-4. Storage (After mounted on customer's PCB with SMT process)

- (1) Storage Temperature: -40°C to 85°C
- (2) Relative Humidity: 10% to 70%

Unictron
Technologies Corp.

2019-03-18

Document



# 詠業科技股份有限公司

Unictron Technologies Corporation
Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Mina Designed by: Peter Checked by: Mike Approved by: Herbert

TITLE: 5.0 x 2.2 x 1.0 (mm) WiFi Band Chip
Antenna(CW503) Engineering Specification

DOCUMENT
NO.

H2U36F1K1B0300
C

# 12. Notice (1) Installation Guide: Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information. (2) All specifications are subject to change without notice.

Unictron
Technologies Corp.

2019-03-18

Document Control Cent



# 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Mina Designed by: Peter Checked by: Mike Approved by: Herbert

TITLE: 5.0 x 2.2 x 1.0 (mm) WiFi Band Chip
Antenna(CW503) Engineering Specification

DOCUMENT
NO.

H2U36F1K1B0300
C

PAGE 10 OF 10