



Features

- High current triac
- Low thermal resistance with clip bonding
- High commutation or very high



VOLTAGE RANGE 600/800 Volts
CURRENT 12 Ampere



TO-220AB



ITO-220AB



TO-252

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

ELECTRICAL CHARACTERISTICS ($T_j = 25^\circ\text{C}$, unless otherwise specified)

Symbol	Parameter	Conditions	Ratings	Unit
VDRM VRRM	Repetitive Peak Off-State Voltage	BT151S-600	600	V
		BT151S-800	800	
IT(RMS)	R.M.S On-State Current	$T_c = 105^\circ\text{C}$	12	A
IT(AV)	On-state average current	$T_c = 105^\circ\text{C}$	7.5	A
ITSM	Surge On-State Current	$T_p = 10\text{ms}/t_p = 8.3\text{ms}$	120/132	A
I^2t	I^2t for fusing	$T_p = 10\text{ms}$	75	A^2s
PGM	Peak Gate Power Dissipation	$T_j = 125^\circ\text{C}$	2	W
PG(AV)	Average Gate Power Dissipation	$T_j = 125^\circ\text{C}$	0.5	W
T_j	Operating Junction Temperature		$\sim 40 \sim 125$	$^\circ\text{C}$
TSTG	Storage Temperature		$\sim 40 \sim 150$	$^\circ\text{C}$

BT151S

Electrical Characteristics (T_J=25°C unless otherwise specified)

Symbol	Parameter	Test Conditions	Value	Unit
IDRM	Repetitive Peak Off-State Current	T _c =25°C	≤10	uA
		T _c =125°C	≤1	mA
IRRM	Repetitive Peak Reverse Current	T _c =25°C	≤10	uA
		T _c =125°C	≤1	mA
VTM	Forward "on" voltage	I _T =23A, t _p =380us	≤1.7	V
VGT	Gate trigger voltage	V _D =12V, R _L =30Ω	≤1.0	V
di/dt	Critical rate of rise of on-state current	T _J =125°C, I _G =2xI _{GT} , t _r ≤100ns	≥50	A/us
IGT	Gate trigger current	V _D =12V, I _T =0.1A	≤20	mA
IL	Latching current	I _G =1.2I _{GT}	≤40	mA
IH	Holding current	I _T =0.1A	≤30	mA
VGD	Gate non-trigger voltage	V _D =V _{DRM} , T _J =125°C, R _L =3.3KΩ, R _{GK} =1KΩ	≥0.25	V
dv/dt	Critical-rate of rise of commutation voltage	T _J =125°C, V _D =2/3V _{DRM} , Gate open circuit	≥200	V/us
Rth(j-c)	Thermal resistance	Junction to case	1	°C/W
Rth(j-a)	Thermal resistance	Junction to ambient	50	°C/W

RATING AND CHARACTERISTIC CURVES (BT151S)

FIG.1: Maximum power dissipation versus RMS on-state current

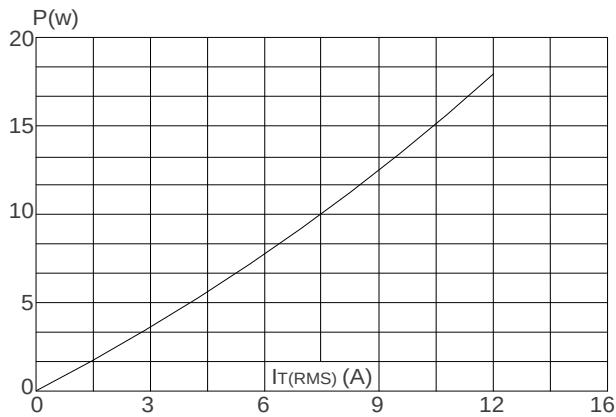


FIG.2: RMS on-state current versus case temperature

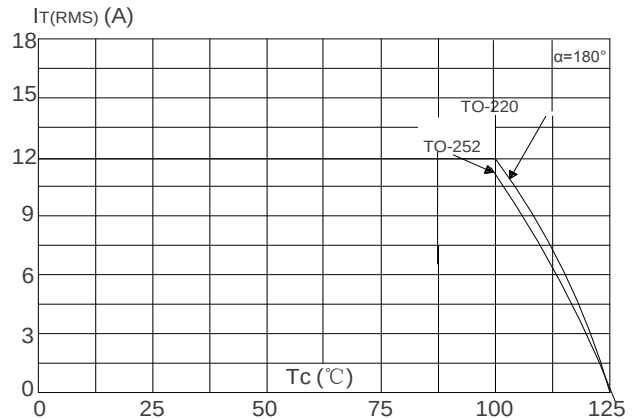


FIG.3: Surge peak on-state current versus number of cycles

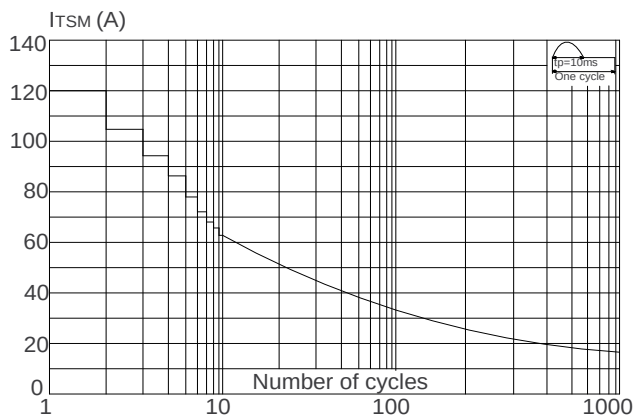


FIG.4: On-state characteristics (maximum values)

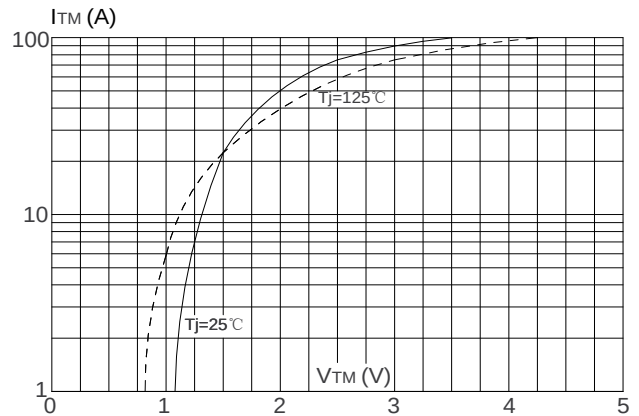


FIG.5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 20ms$, and corresponding value of $I^2 t$ ($di/dt < 100A/\mu s$)



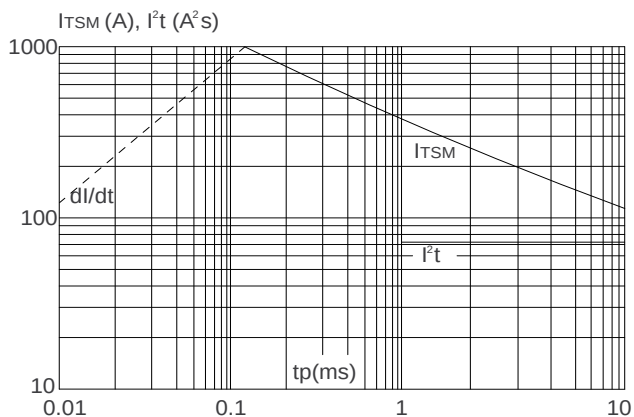



FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature

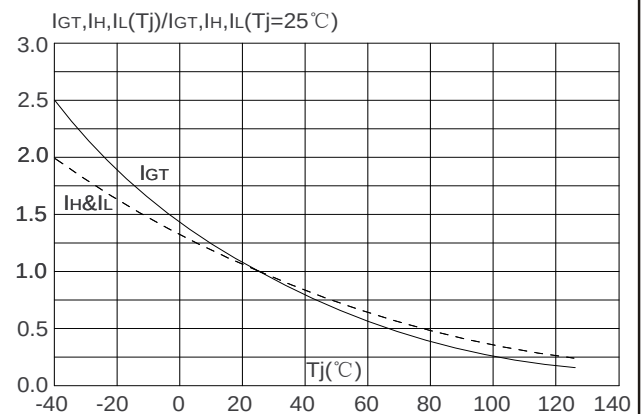

ITO-220AB

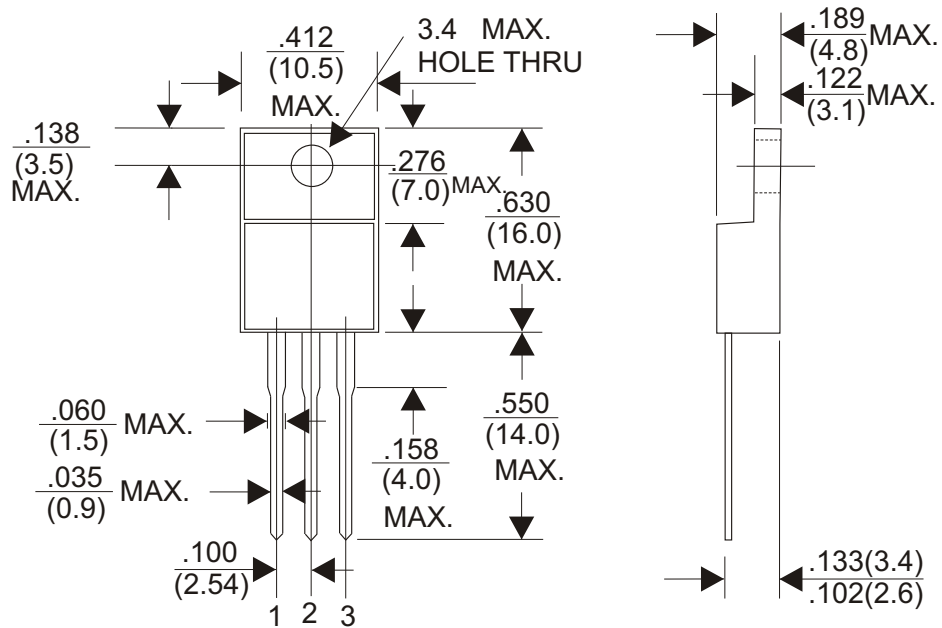


TO-220AB

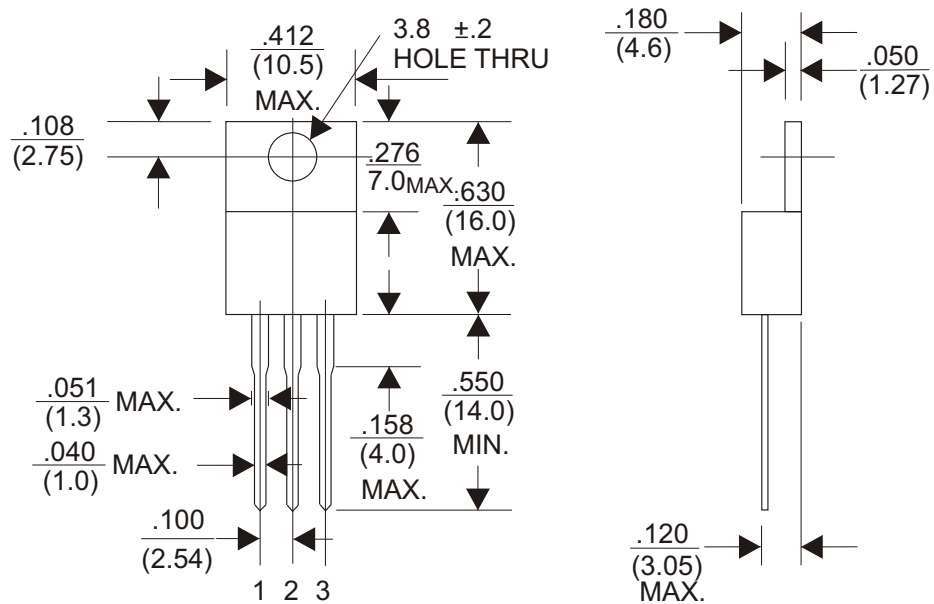

TO-252

Unit: mm

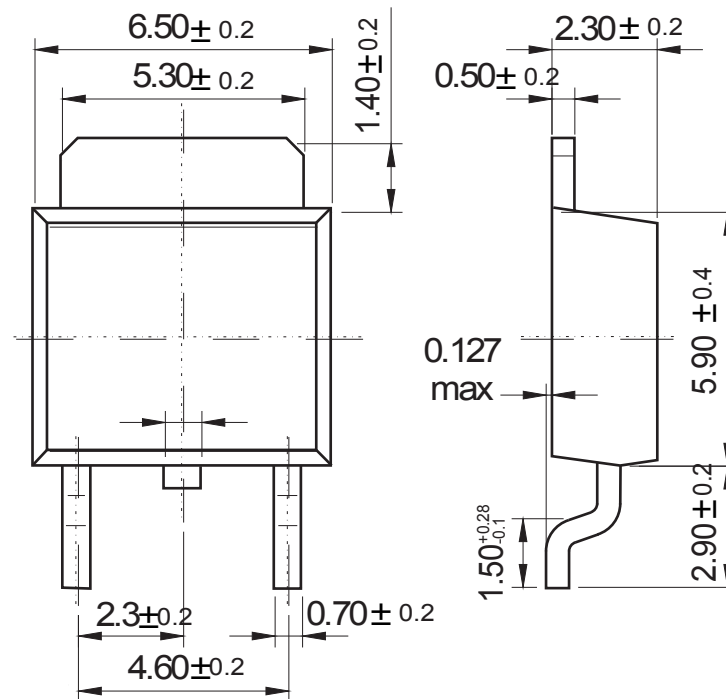

Dimensions in inches and (millimeters)