





RoHS

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PBT
Max.Processing Temp: 180°C for 30−60 seconds
(200°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

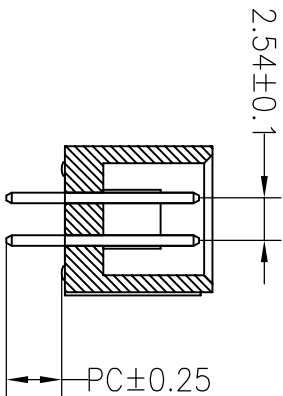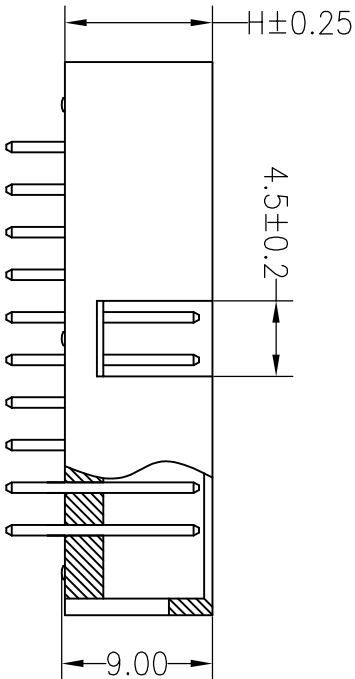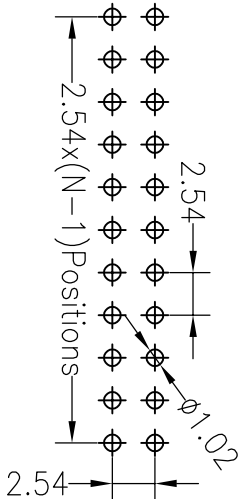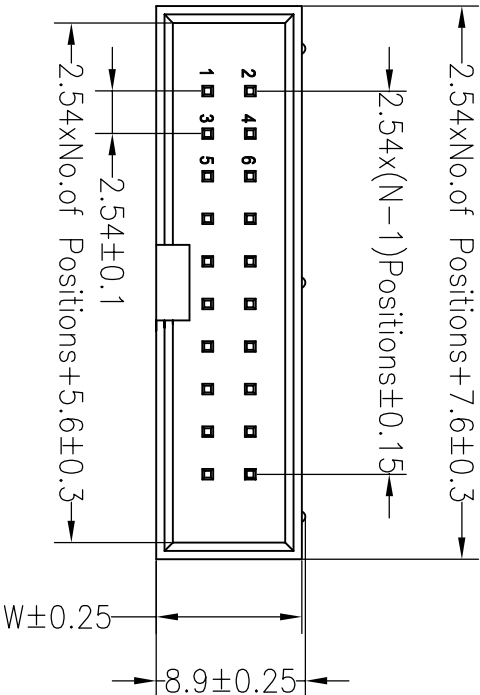

Ordering Information

J	X	XXX	X	XX	X	X	X	XXXX
产品类型	1=127	总Pin数	产品形态	电镀厚度	绝缘材料	绝缘颜色	包装方式	序列号
J= 筒中	2=2.0	016=16P	1=DIP	00= 常规	1=PBT	1=黑色	1=卷装	0001-9999
	3=2.54		2=RA	01=14"	2=ICP	2=灰色	2=卷装	
	4=3.96		3=SMT	02=20"	3=PPS	3=白色	3=卷装	
	5=1.0		4=贴片	03=30"	4=PA46	4=蓝色	4=卷装	
	6=1.0		5=贴片	04=30"	5=PA6T	5=红色	5=卷装	
	7=5.08		6=贴片	05=30"	6=PA6T	6=黄色	6=卷装	
	A=1.27	2.54	7=贴片	06=30"	7=PA6T	7=灰白色	7=卷装	

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001		3.3		8.8	8.7
002					

OPERATION		DRAW		SCALE		FIT		PART NO.		TITLE:	
X.X		±0.30		UNIT		mm		A4		1/1	
X.XX		±0.20		CHECK		SIZE		A4		1/1	
X.XXX		±0.10		APPROVE		SHEET		1/1		1/1	
Angle		±3°		PROJ.		PROJ.		1/1		1/1	
DIM		TOL		PROJ.		PROJ.		1/1		1/1	
CHANGE		CHANGE		CHANGE		CHANGE		CHANGE		CHANGE	
MODIFICATION DESCRIPTION		MODIFICATION DESCRIPTION		MODIFICATION DESCRIPTION		MODIFICATION DESCRIPTION		MODIFICATION DESCRIPTION		MODIFICATION DESCRIPTION	
DATE		DATE		DATE		DATE		DATE		DATE	
REV		REV		REV		REV		REV		REV	
2012.03.28		2012.03.28		2012.03.28		2012.03.28		2012.03.28		2012.03.28	
NEW DRAWING		NEW DRAWING		NEW DRAWING		NEW DRAWING		NEW DRAWING		NEW DRAWING	
1		1		1		1		1		1	
2		2		2		2		2		2	
3		3		3		3		3		3	
4		4		4		4		4		4	
5		5		5		5		5		5	
6		6		6		6		6		6	
7		7		7		7		7		7	
8		8		8		8		8		8	
9		9		9		9		9		9	

深圳市连盛精密连接器有限公司

1030300319

2.54BOX NP H=8.8 DIP PC3.3
L=11.5 AU0.6U PBT 黑色