

High Temperature Stability and High Reliability Conditions



DO-218AB



FEATURES

- Junction passivation optimized design passivated anisotropic rectifier technology
- $T_J = 175^{\circ}\text{C}$ capability suitable for high reliability and automotive requirement.
- Available in bi-directional polarity
- Low leakage current
- Low forward voltage drop
- High surge capability
- Meets ISO16750-2 surge specification(varied by test condition)
- Meets MSL-1, per J-STD-020, LF maximum peak of 245°C .
- AEC-Q101 qualified.
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC

TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting, especially for automotive load dump protection application.

MECHANICAL DATA

Case: DO-218AB

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

PRIMARY CHARACTERISTICS	
V_R	12V to 36V
P_{PPM} (10/1000 μs)	6600W
P_{PPM} (10/10000 μs)	5200W
P_D	8W
T_{Jmax}	175°C
Polarity	Bi-directional
Package	DO-218AB

MAXIMUM RATINGS($T_C=25^{\circ}\text{C}$, RH=45%-75%, unless otherwise noted)			
Parameter	Symbol	Value	Unit
Peak pulse power dissipation on 10/1000 μs waveform	P_{PPM}	6600	Watts
Peak pulse power dissipation on 10/10000 μs waveform		5200	Watts
Power dissipation on infinite heat sink at $T_C=25^{\circ}\text{C}$	P_D	8.0	Watts
Peak pulse current with 10/1000 μs waveform	$I_{PPM}^{(1)}$	See next table	Amps
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +175	$^{\circ}\text{C}$
Typical thermal resistance, junction to case	$R_{\theta JC}$	0.9	$^{\circ}\text{C/W}$

Note

(1) Non-repetitive current pulse derated above $T_A=25^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS								
Part Number	V _R	I _T	I _R @V _R		V _{BR} @I _T		V _C @I _{PP}	I _{PP}
Bi-polar	V	mA	μA@25°C	μA@175°C	min(V)	max (V)	V	A
SM8S12CA	12.0	5	5	150	13.3	14.7	19.9	332
SM8S13CA	13.0	5	5	150	14.4	15.9	21.5	307
SM8S14CA	14.0	5	5	150	15.6	17.2	23.2	284
SM8S15CA	15.0	5	5	150	16.7	18.5	24.4	270
SM8S16CA	16.0	5	5	150	17.8	19.7	26.0	253
SM8S17CA	17.0	5	5	150	18.9	20.9	27.6	239
SM8S18CA	18.0	5	5	150	20.0	22.1	29.2	226
SM8S20CA	20.0	5	5	150	22.2	24.5	32.4	204
SM8S22CA	22.0	5	5	150	24.4	26.9	35.5	186
SM8S24CA	24.0	5	5	150	26.7	29.5	38.9	170
SM8S26CA	26.0	5	5	150	28.9	31.9	42.1	157
SM8S28CA	28.0	5	5	150	31.1	34.4	45.4	145
SM8S30CA	30.0	5	5	150	33.3	36.8	48.4	136
SM8S33CA	33.0	5	5	150	36.7	40.6	53.3	124
SM8S36CA	36.0	5	5	150	40.0	44.2	58.1	114

Note:

①.Surge waveform:10/1000μs

V_R: Stand-off voltage -- Maximum voltage that can be applied


V_{BR}: Breakdown voltage

V_C: Clamping voltage -- Peak voltage measured across the suppressor at a specified I_{PP}

I_R: Reverse leakage current

I_T: Test current

ORDERING INFORMATION

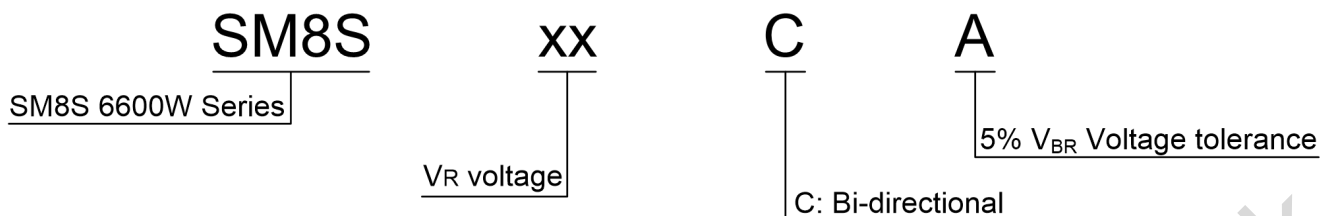

RATINGS AND CHARACTERISTICS CURVES ($T_A=25^\circ\text{C}$, unless otherwise noted)

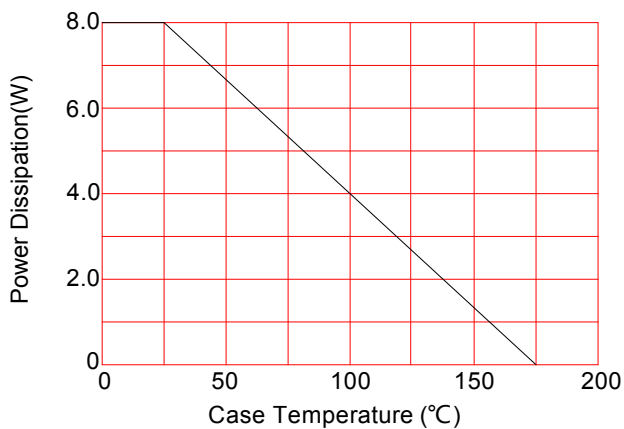


FIG.1: Power Derating Curve

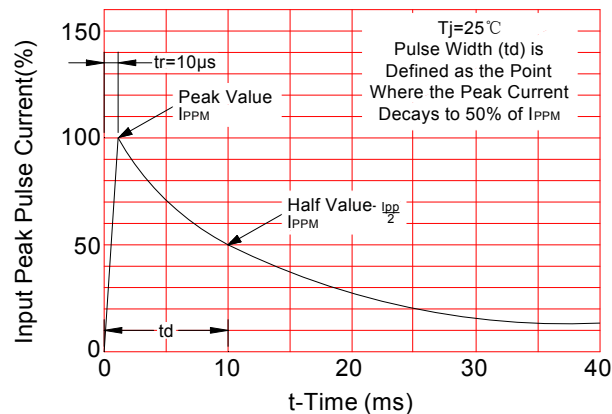


FIG.2: Pulse Waveform

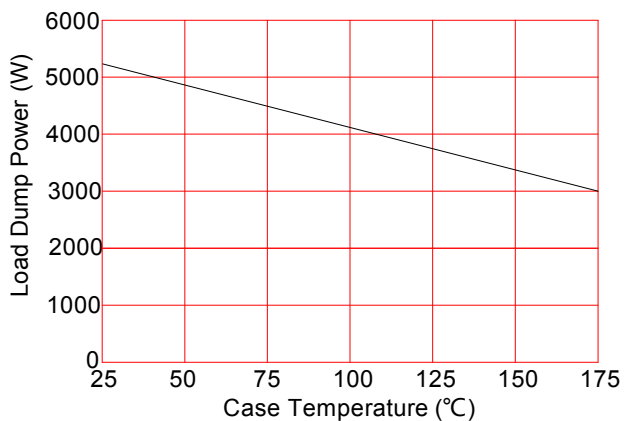


FIG.3: Load Dump Power Characteristics
(10ms Exponential Wavafom)


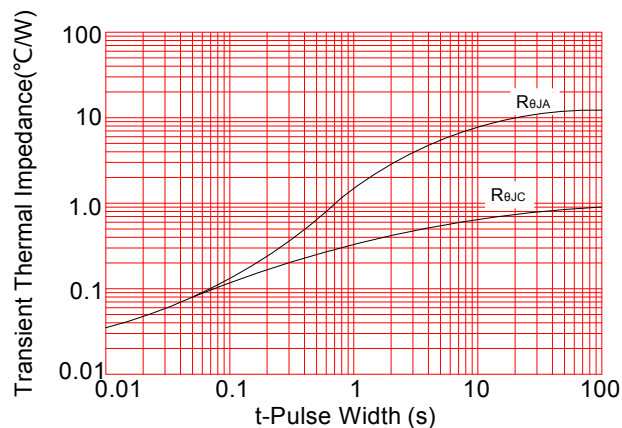


FIG.4: Typical Transient Thermal Impedance

MARKING




SM8S36CA: Part Number


Cathode

SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see FIG.5)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (t_s)	60-180 secs.
Average ramp up rate (Liquidus Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquidus)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_P)		20-40secs.
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

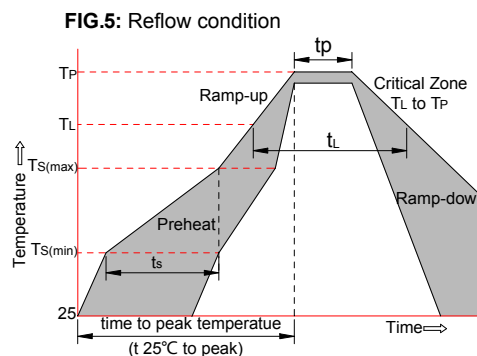


PACKAGE MECHANICAL DATA

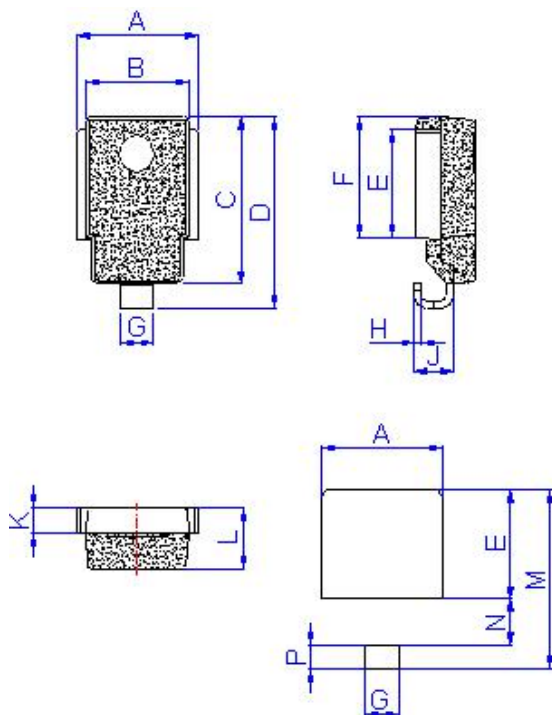

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	9.5	10.5	0.374	0.413
B	8.3	8.7	0.327	0.342
C	13.3	13.7	0.524	0.539
D	15.0	16.0	0.592	0.628
E	8.5	9.1	0.335	0.358
F	9.5	10.1	0.374	0.398
G	2.4	3.0	0.094	0.118
H	0.5	0.7	0.020	0.028
J	2.7	3.7	0.106	0.146
K	1.9	2.1	0.075	0.083
L	4.7	5.1	0.185	0.201
M	14.2	14.8	0.559	0.583
N	3.5	4.1	0.138	0.161
P	1.6	2.2	0.063	0.087

TAPE AND REEL SPECIFICATION-DO-218AB

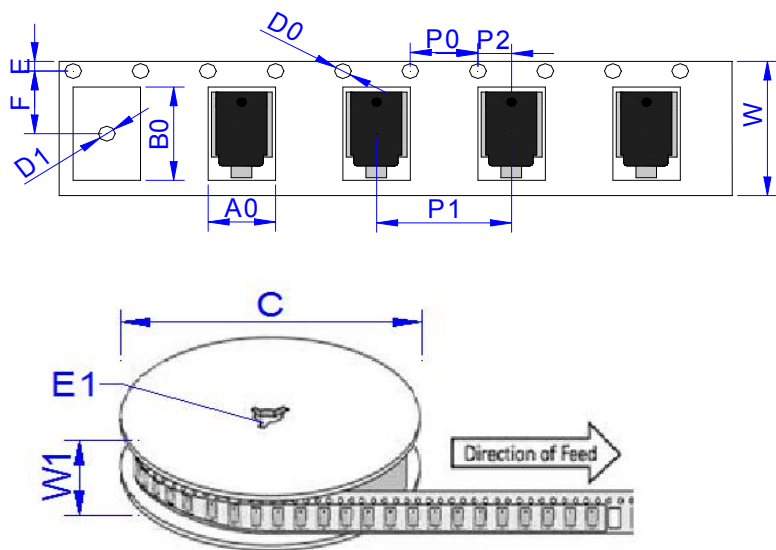

Ref.	Dimensions	
	Millimeters	Inches
A0	10.80 ± 0.3	0.425 ± 0.012
B0	16.13 ± 0.3	0.635 ± 0.012
C	330.0 ± 0.3	13.0 ± 0.012
D0	1.55 ± 0.2	0.061 ± 0.008
D1	1.55 ± 0.2	0.061 ± 0.008
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.30 ± 0.2	0.524 ± 0.008
F	11.50 ± 0.2	0.453 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	16.00 ± 0.2	0.630 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	24.00 ± 0.2	0.945 ± 0.008
W1	25.85 ± 0.2	1.018 ± 0.008

ORDERING INFORMATION

PREFERRED P/N	UNIT WEIGHT (g) typ	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)
SM8SxxCA	2.985	750	3000	330

WPMtek reserves the right to make changes to the product specification and data in this document without notice. WPMtek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does WPMtek assume any liability arising from the application or use of any products or circuits, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Any enquiry, please write to sales@wpmtek.com for further information.