

Rohs

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance: 20mΩ Max

Withstand Voltage:400V AC/DC

Insulation Resistance: 800M Ω Min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material:Brass










Contact Plating: Au or Sn Over Ni

Insulator Material: Polyester (UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30–60 seconds

(260°C for 10 seconds)

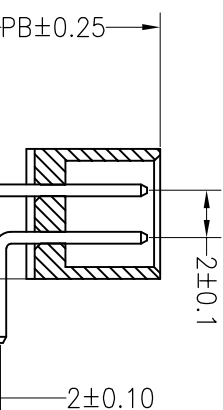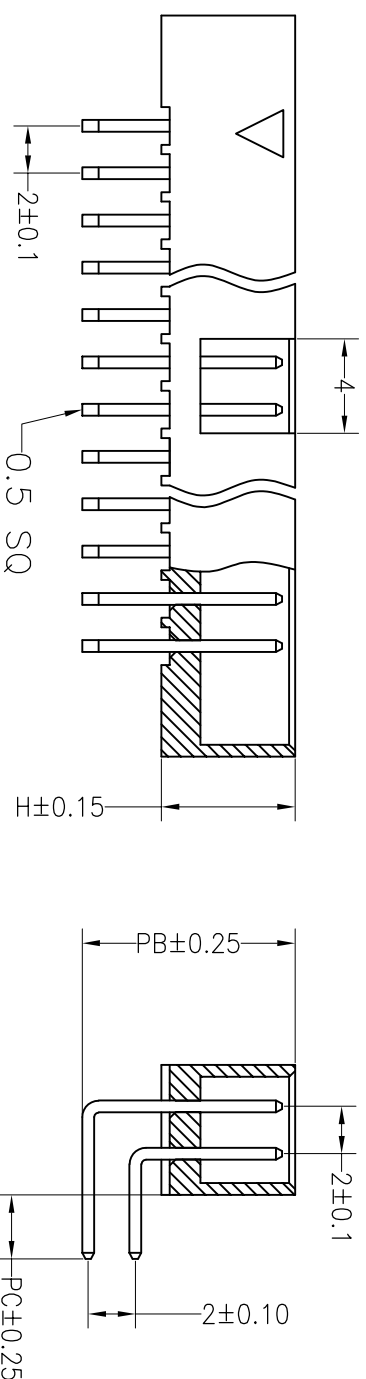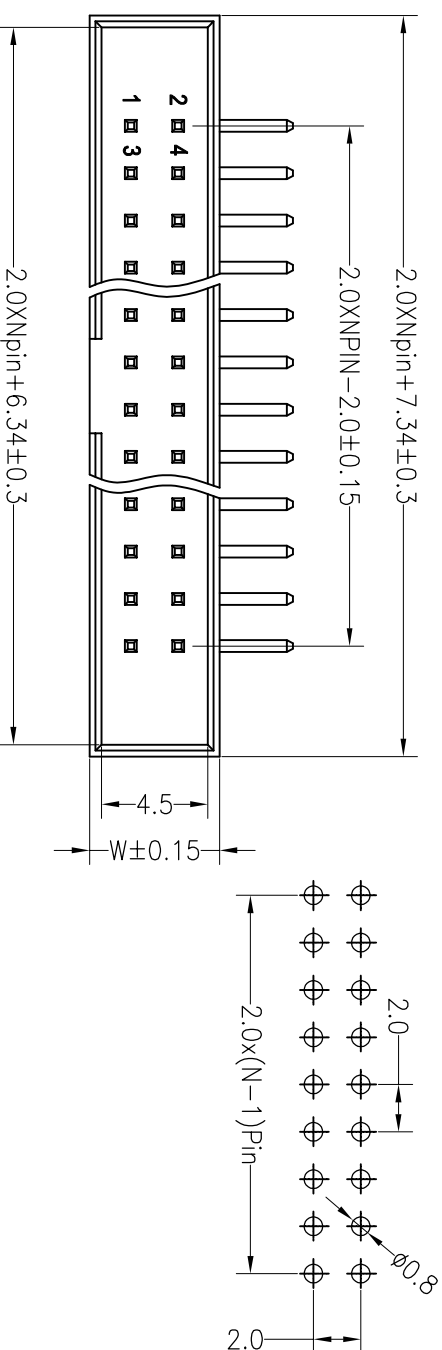

Ordering Information

2 XXXX
 3 XXX
 4 X
 5 X
 6 X
 7 XXXX

产品类别	产品型号
厚度	1=1.27
站口宽	01=6 16P
产品品牌	1=DIP
芯厚度	2=RA
01=站口	3=SN
02=站口	5=站口
03=站口	SE=站口
04=站口	
05=站口	
06=站口	
07=站口	
08=站口	
09=站口	
10=站口	
11=站口	
12=站口	
13=站口	
14=站口	
15=站口	
16=站口	
17=站口	
18=站口	
19=站口	
20=站口	
21=站口	
22=站口	
23=站口	
24=站口	
25=站口	
26=站口	
27=站口	
28=站口	
29=站口	
30=站口	
31=站口	
32=站口	
33=站口	
34=站口	
35=站口	
36=站口	
37=站口	
38=站口	
39=站口	
40=站口	
41=站口	
42=站口	
43=站口	
44=站口	
45=站口	
46=站口	
47=站口	
48=站口	
49=站口	
50=站口	
51=站口	
52=站口	
53=站口	
54=站口	
55=站口	
56=站口	
57=站口	
58=站口	
59=站口	
60=站口	
61=站口	
62=站口	
63=站口	
64=站口	
65=站口	
66=站口	
67=站口	
68=站口	
69=站口	
70=站口	
71=站口	
72=站口	
73=站口	
74=站口	
75=站口	
76=站口	
77=站口	
78=站口	
79=站口	
80=站口	
81=站口	
82=站口	
83=站口	
84=站口	
85=站口	
86=站口	
87=站口	
88=站口	
89=站口	
90=站口	
91=站口	
92=站口	
93=站口	
94=站口	
95=站口	
96=站口	
97=站口	
98=站口	
99=站口	
100=站口	

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001	9.0	2.7		5.65	5.5
002					

深圳市连盛精密连接器有限公司									
		SCALE		FIT		PART NO. 1030200170			
		UNIT		mm					
		SIZE		A4					
		SHEET		1/1		TITLE: 2.0Box Header Npin H5.65 L=10.5/14.5 90°			
		PROJ.							
		OPERATION		DRAW					
		X.X		±0.30					
		X.XX		±0.20					
A1	2014.12.26	总高9.2改为9.0		CHECK					
		X.XXX		±0.10					
A0	2012.07.26	NEW DRAWING							
REV	DATE	MODIFICATION DESCRIPTION		CHANGE		APPROVE			
		DIM		TOL					

深圳市连盛精密连接器有限公司

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)