

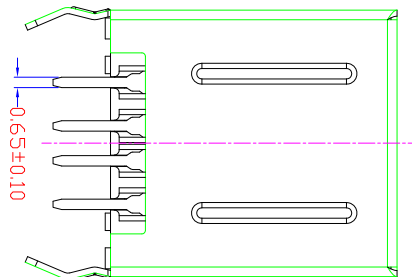
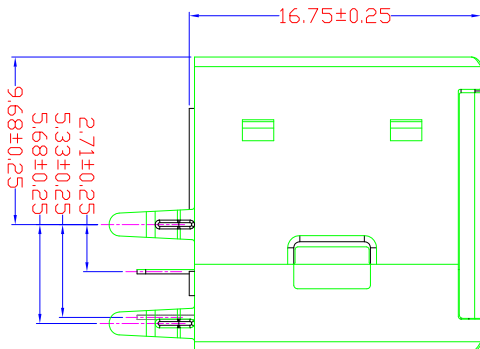
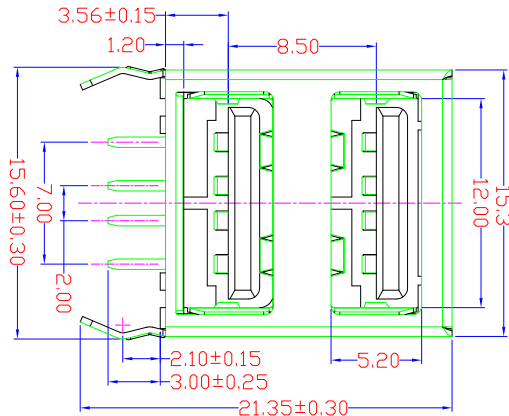



目錄 MAPX	變更內容 MODIFICATION	日期 DATE



RECOMMEND P. C. B. LAYOUT

NOTES:  
1. MATERIAL SPECIFICATION:  
1) HOUSING MATERIAL:SEE PART NO.  
2) SHELL MATERIAL:SEE PART NO. T:0.35mm  
PLATING:SEE PART NO.  
3) BACK COVER MATERIAL:SPCC T:0.35mm  
PLATING:NICKE.  
4) SHRAPNEL MATERIAL:SEE PART NO. T:0.25mm  
5) TERMINAL: COPPER ALLOY T:0.25mm  
PLATING:SEE PART NO.  
2. ELECTRICAL CHARACTERISTIC:  
1) VOLTAGE CURRENT RATING: 1AMP, 30V DC;  
2) INSULATION RESISTANCE: 1000MΩ MIN;  
3) CONTACT RESISTANCE: 30mΩ MAX;  
4) WITHSTANDING VOLTAGE: 500V AC;  
3. MECHANICAL:  
1) MATING FORCE:3.57 KG MAX  
2) UNMATING FORCE:1.02 KG MIN.  
4. 02-1X XAX X XNX X XN-001  
1 2 3 4 5 6 7 8  
1.外壳材质代码: A:黄铜C2680, B:磷铜C5191,  
D:单光铁 E:双光铁  
2.外壳电镀代码: A:镀镍12H, B:镀镍24H, C:镀镍48H, D:镀雾镍  
3:中夹片材质及电镀代码:A:SPCC 镀镍 E:黄铜 镀镍  
I:磷铜 镀镍 K:不锈钢  
L:不锈钢 镀镍  
4:主体胶芯材质代码: A:BT, B:LCP, F:PA66  
5:主体胶芯颜色代码: 1:白色 2:黑色 3:木色  
6:端子材质代码: 1:黄铜C2680, 2:磷铜C5191,  
7:端子电镀代码: A:半金锡G/F, B:半金锡3u",  
C:半金锡15u", D:半金锡30u",  
E:半金雾锡G/F, F:半金雾锡3u",  
G:半金雾锡15u", H:半金雾锡30u",  
8: 环保代码: N:非环保, R:ROHS, S:SONY, F:ROHS+无卤

产品图

PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE			单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.
X	±0.15	X'	±5°	Z-Y-B	907-121A1028D10200
X	±0.10	X'	±2°	郭治富	AF/90度双层全包弯脚铁壳黑胶
XX	±0.05	XX'	±1°	审核 CHAO	产品名称 PRODUCT NO.
XXX	±0.03	XXX'	±0.5°	核准 APPD	角法 VIEW
日期 DATE			2012/10/20	叶文国	版本 VER
					AO