RoHS

| 序号 (NO.) | 品名 (Name) | 材质 (Material) |
|---|---|---|
| ① | 2.00 F型卧式2代WTB胶芯 2.00 Pitch R/A Wire To Board Housing(H=5.2) | LCP UL94V-0 本色 Natural |
| ② | 2.00 F型卧式2代WTB端子 2.00 Pitch R/A Wire To Board Terminal(H=5.2) | 铜合金/表面镀锡 Copper Alloy/ Tin Plating |
| ③ | 2.00 F型卧式WTB焊片 2.00 Pitch R/A Wire To Board Fitting Nail(H=5.6) | 铜合金/表面镀锡 Copper Alloy/ Tin Plating |

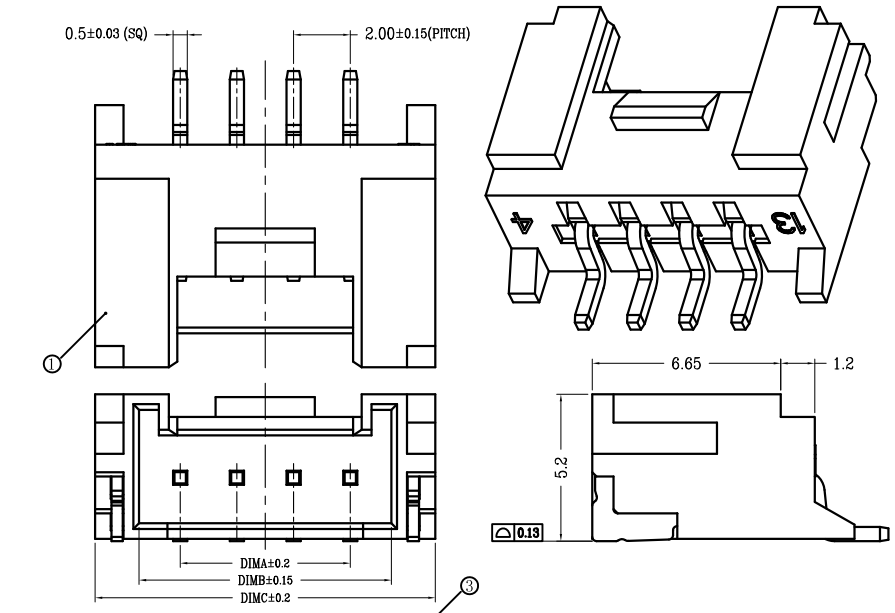


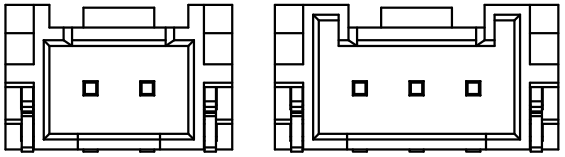

2 PIN 结构样式
(Structural style)

3 PIN 结构样式
(Structural style)

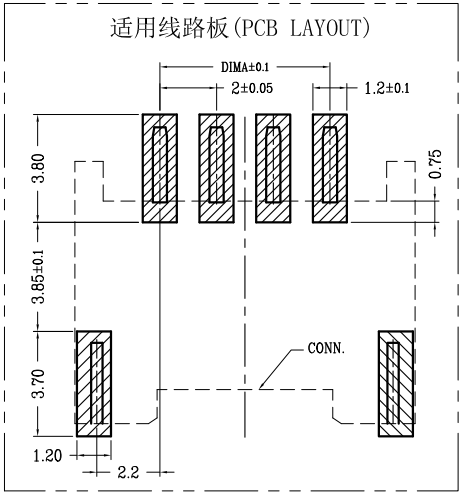


技术指标(Technical Index):

1. 温度范围(Temperature range): -40° C～+ 105° C.
2. 额定电压(Rated voltage): 200V, AC.
3. 额定电流(Rated Current):2A AC/DC
4. 接触电阻(Contact resistance): ≤20mΩ
5. 绝缘电阻(Insulation resistance):≥1000MΩ.
6. 产品料号(Product material No.):

| CKT | DIM A | DIM B | DIM C |
|---|---|---|---|
| 2 | 2.00 | 4.90 | 8.00 |
| 3 | 4.00 | 6.90 | 10.00 |
| 4 | 6.00 | 8.90 | 12.00 |
| 5 | 8.00 | 10.90 | 14.00 |
| 6 | 10.00 | 12.90 | 16.00 |
| 7 | 12.00 | 14.90 | 18.00 |
| 8 | 14.00 | 16.90 | 20.00 |
| 9 | 16.00 | 18.90 | 22.00 |
| 10 | 18.00 | 20.90 | 24.00 |
| 11 | 20.00 | 22.90 | 26.00 |
| 12 | 22.00 | 24.90 | 28.00 |
| 13 | 24.00 | 26.90 | 30.00 |
| 14 | 26.00 | 28.90 | 32.00 |
| 15 | 28.00 | 30.90 | 34.00 |
| 16 | 30.00 | 32.90 | 36.00 |
| 17 | 32.00 | 34.90 | 38.00 |
| 18 | 34.00 | 36.90 | 40.00 |
| 19 | 36.00 | 38.90 | 42.00 |
| 20 | 38.00 | 40.90 | 44.00 |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
|---|---|---|---|
| A0 | 2012.04.18 | NEW DRAWING | |

| OPERATION | | | |
|---|---|---|---|
| X.X | ±0.30 | DRAW | |
| X.XX | ±0.20 | CHECK | |
| X.XXX | ±0.10 | | |
| Angle | ±3° | APPROVE | |
| DIM | TOL | | |

| | |
|---|---|
| SCALE | FIT |
| UNIT | mm |
| SIZE | A4 |
| SHEET | 1/1 |
| PROJ. | |

深圳市连盛精密连接器有限公司

| | |
|---|---|
| PART NO. | 1130300243 |
| TITLE: | HY-NAWR |