

Note:

1.Material

- 1.1: Housing: LCP UL94-V0 Color:Natural.Or Black
- 1.2: Actuator: LCP OR PA UL94-V0 Color:Black Or Natural
- 1.3: Contact: Phosphor Bronze.
- 1.4: LEG: Phosphor Bronze.

2.Plating

- 2.1: Contact: See Part Number.
- 2.2: LEG: Matte Tin Plating Over Nickel.


3.Rating:

- 3.1: Operating Voltage: 30V AC/DC.
- 3.2: Current Rating: 0.2A AC/DC.
- 3.3: Operating Temperature:-55°C~+85°C.

4.Pater Number:

CFPC 03 10-xx RL-Tx G

G=Gold flash
TA: Tape Rell Packing
TU: Tube Packing
Right Angle/Lower Contact Type
NO. of contacts
Series name
Pitch=0.3mm
FPC Series

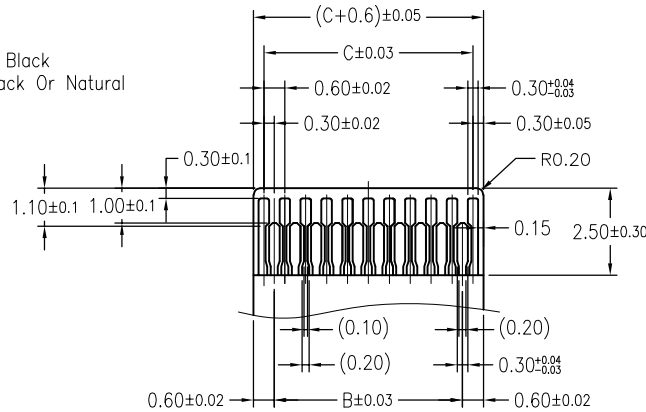


Applicable FPC

Number of Contacts	Dimension				
	A	B	C	D	E
13	5.40	3.00	3.60	4.25	4.90
15	6.00	3.60	4.20	4.85	5.50
17	6.60	4.20	4.80	5.45	6.10
19	7.20	4.80	5.40	6.05	6.70
21	7.80	5.40	6.00	6.65	7.30
23	8.40	6.00	6.60	7.25	7.90
25	9.00	6.60	7.20	7.85	8.50
27	9.60	7.20	7.80	8.45	9.10
29	10.20	7.80	8.40	9.05	9.70
31	10.80	8.40	9.00	9.65	10.30
33	11.40	9.00	9.60	10.25	10.90
35	12.00	9.60	10.20	10.85	11.50
37	12.60	10.20	10.80	11.45	12.10
39	13.20	10.80	11.40	12.05	12.70
41	13.80	11.40	12.00	12.65	13.30
45	15.00	12.60	13.20	13.85	14.50
49	16.20	13.80	14.40	15.05	15.70
51	16.80	14.40	15.00	15.65	16.30
57	18.60	16.20	16.80	17.45	18.10
61	19.80	17.40	18.00	18.65	19.30
67	21.60	19.20	19.80	20.45	21.10
71	22.80	20.40	21.00	21.65	22.30
73	23.40	21.00	21.60	22.25	22.90

—TOLERANCES—
UNLESS OTHERWISE SPECIFIED
公差参考表

X.X	±0.30	X.X*	±5°
X.XX	±0.20	X.XX*	±2°
X.XXX	±0.10	X.XXX*	±1°

LXW 连兴旺电子(深圳)有限公司
LXWCONN ELECTRONICS (SHENZHEN) CO., LTD



TITLE: FPC 0.3Pitch 1.0H ZIF
产品名称: R/A Connector


APPD: Gao
核准: Liupeng
CHECK: Yang
DRAW: Yang

DWG NO:	CFPC0310-xxRL-TAG
DATE	20111004
SCALE	1:1
UNIT	mm
PAGE	1/1



本产品需符合 □RoHS □SONY00259 □HF □其他
※禁止使用本公司所禁用有毒物质

EMBOSSED TAPE PACKING

0.3mm Pitch FPC Connector, ZIF R/A SMT Type

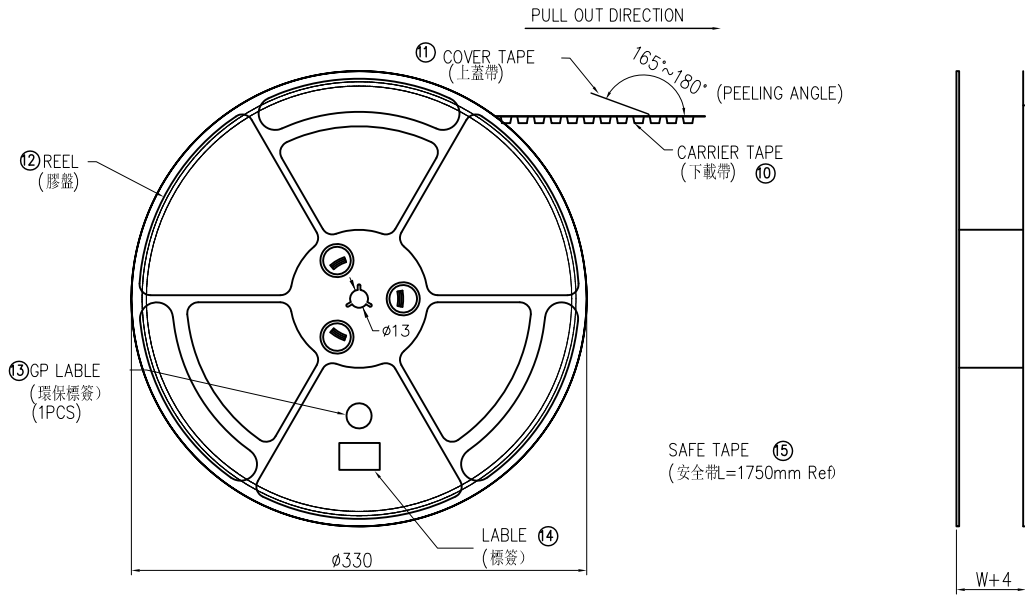

SCALE 1:4

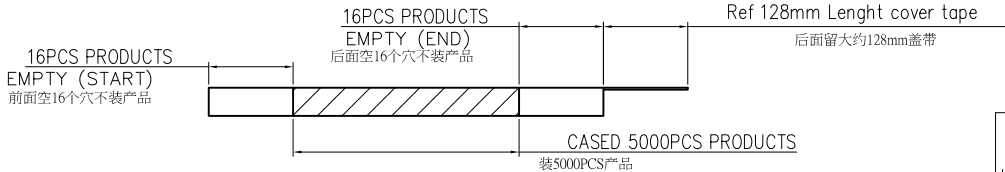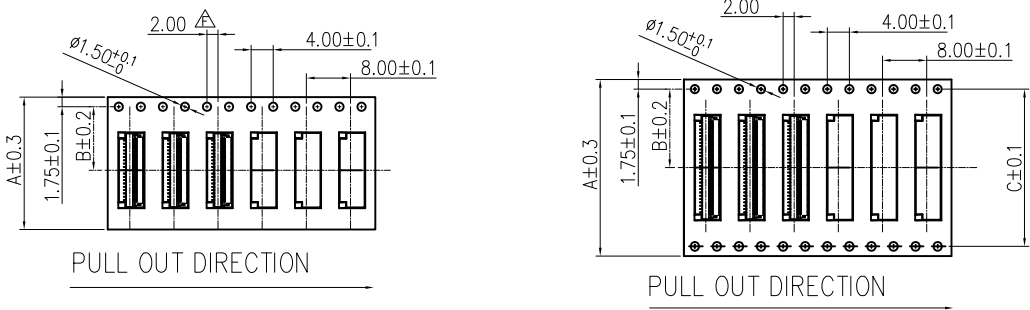


A	-----	-----	Liu	02/18'13	
REV	DESCRIPTION	ECN NO	BY	DATE	

本产品需符合 □ RoHS □ SONY00259 □ HF □ 其他
※禁止使用本公司所禁用有毒物质

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
- 2.Carrier camber is within 1mm in 100mm.
- 3.Material: black conductive polystyrene alloy.
- 4.Material Thickness: 0.3 ± 0.05 mm.
- 5.All dimensions meet EIA-481-B requirements.
- 6.5000pcs Pef Reel.
- 7.For tape width(dim W)16 and 24mm pilot holes are provided on one sides.
For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.

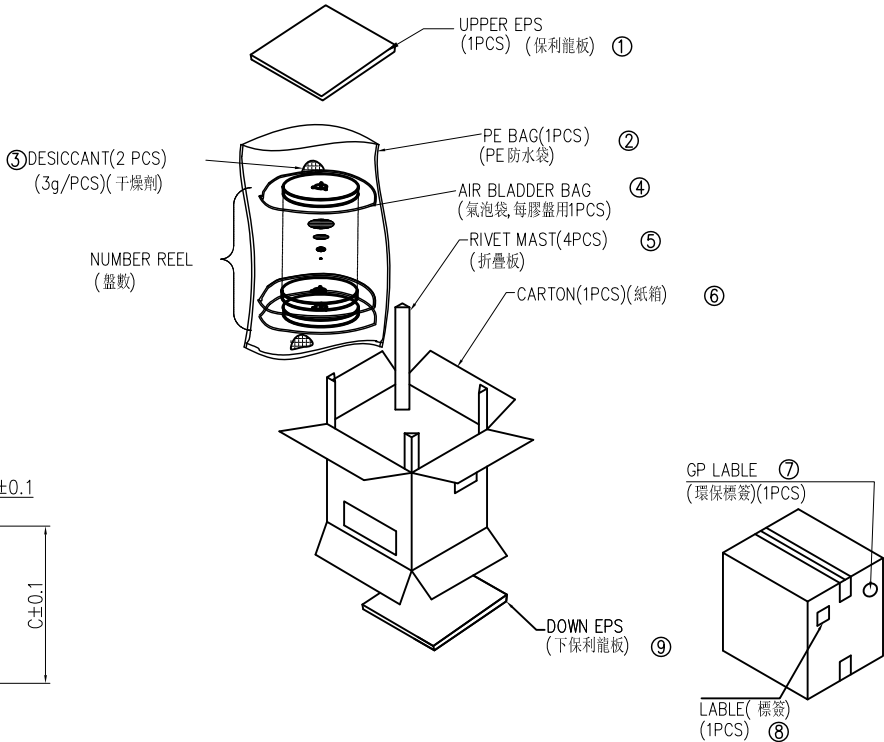

PIN NO.	W	A	B	C	PCS /REEL	REEL/CARTON	SUM(PCS)
13PIN~25PIN	20.5	16	7.50	—	5000	13	65000
27PIN~49PIN	28.5	24	11.5	—	5000	10	50000
51PIN~61PIN	36.5	32	14.2	28.4	5000	8	40000
67~73PIN	48.5	44	20.2	40.4	5000	6	30000

— TOLERANCES — UNLESS OTHERWISE SPECIFIED 公差参考表		LXW 连兴旺电子(深圳)有限公司 LXWCONN ELECTRONICS (SHENZHEN) CO., LTD			
X.X : ± 0.30	X.X* : $\pm 5^{\circ}$	TITLE: 產品名稱: 0.3mm Pitch FPC Connector		DWG NO: 產品料號: FPC0310-xxRL-TAG	
X.XX : ± 0.20	X.XX* : $\pm 2^{\circ}$	CHECK: 校對:		DATE	SCALE
X.XXX : ± 0.10	X.XXX* : $\pm 1^{\circ}$	DRAW: 繪圖: Yang		20111208	UNIT
				1:1	PAGE
				mm	1/1